




Description	Cartridge pressure regulator suitable for assembly block.				
Media	compressed air or non-corrosive gases				
Supply pressure	max. 12 bar				
Adjustment	Select the pressure regulator according to the desired outlet pressure. The outlet pressure cannot be subsequently adjusted. This safeguards against tampering.				
Relieving function	non-relieving				
Temperature range	-20 °C to 60 °C / -4 °F to 140 °F				
Material	Body: brass	Piston: brass			
	Elastomer: NBR/Buna-N	Filter: stainless steel			



Dimensions		Flow rate	Supply pressure	Connection thread	Outlet pressure	Order number
A	A/F	l/min*1	max. bar	G	bar*2	
mm	mm					

Factory-set outlet pressure

P₁: max. 12 bar, non-relieving, outlet pressure accuracy *2

233


24	14	350	12	G1/4 a	2	233G0220
					3	233G0230
					4	233G0240
					6	233G0260



233

Special options, add the appropriate letter

NPT	connection thread	233GX2.0
-----	-------------------	----------

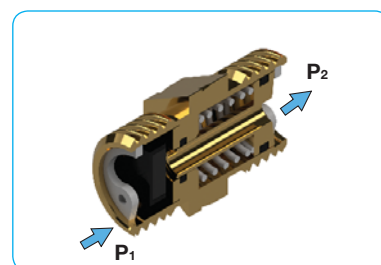


cross section

Accessories

Adapter G1/4	263F0221
--------------	----------



233 incl. Adapter

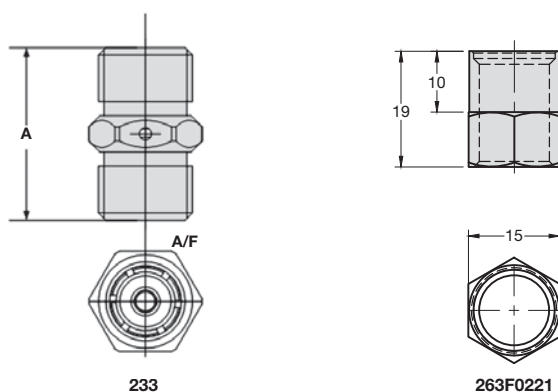


233

263F0221

*1 P_e = 12 bar; Δp = 0.5 bar

*2 Tolerance: 2 bar ± 0,6 bar (air, P_e = 6 bar, 10 l/min)
4 bar ± 0,8 bar (air, P_e = 6 bar, 10 l/min)
6 bar ± 1,0 bar (air, P_e = 10 bar, 10 l/min)

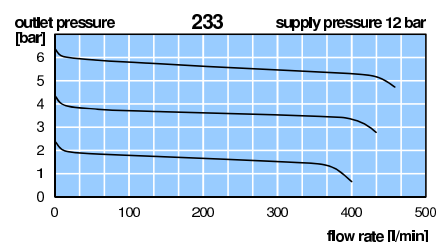

Order example:
233G0220