



CATALOGUE LEGRIS RECTUS

Low-pressure connection solutions for
industrial applications.



SUMMARY

PUSH-IN FITTINGS > PAGE 06

LF 3000®  P.12	LF 3000® multi-connectors  P.24	LF 6000 LIQUIfit®  P.26	LF 3600  P.30
LF 3800  P.34	LF 6100  P.38	LF 6800 Cleanfit  P.40	LF Carstick® cartridges  P.42

FUNCTION FITTINGS > PAGE 46

Blocking fittings  P.52	Soft start fittings  P.54	Non-return valves  P.56	Adjustable non-return valves  P.60
Piloted non-return valves  P.62	Flow control fittings  P.64	Quick-release valves  P.82	Pressure regulator fittings  P.84
Pressure reducer fittings  P.86	Snap fittings  P.88	Manually operated fittings and valves  P.90	Sensor fittings with detection  P.92
Silencers  P.94			

COMPRESSION FITTINGS > PAGE 98

Brass compression fittings  P.102	Stainless steel compression fittings  P.112	
---	---	--

COUPLERS > PAGE 116

Brass couplers  P.122	Nickel-plated brass couplers  P.132	Stainless steel couplers  P.160	High-flow couplers  P.176
Safety couplers  P.180	Safety self-venting couplers  P.186	Thermoplastic couplers  P.202	Flat face couplers  P.212

VALVES > PAGE 220

Standard valves with long handles



P.226

High-temperature valves with long handles



P.232

Short handle polymer valves



P.234

Short handle metal valves



P.238

Special valves for combustible gases



P.242

Specialised valves for technical gases



P.244

Needle valves



P.246

Axial valves



P.248

TUBINGS AND HOSES > PAGE 252

PU tubing



P.260

Antistatic PU tubing



P.264

Anti-spark PU tubing



P.266

PA tubing



P.268

Anti-spark PA tubing



P.272

Fireproof PA tubing



P.274

PE tubing



P.276

FEP tubing



P.278

PFA tubing



P.280

Recoiled tubing



P.282

Braided PVC hose



P.286

Self-fastening hose



P.288

CONNECTION ACCESSORIES > PAGE 290

Adaptors



P.294

Plugs



P.304

Manifolds



P.308

Range accessories



P.310

Blowguns



P.318


Water pistols and workshop blowguns



P.324

HOW TO USE THE CATALOGUE

Find an **introduction to each chapter** with the main features and help with choosing.

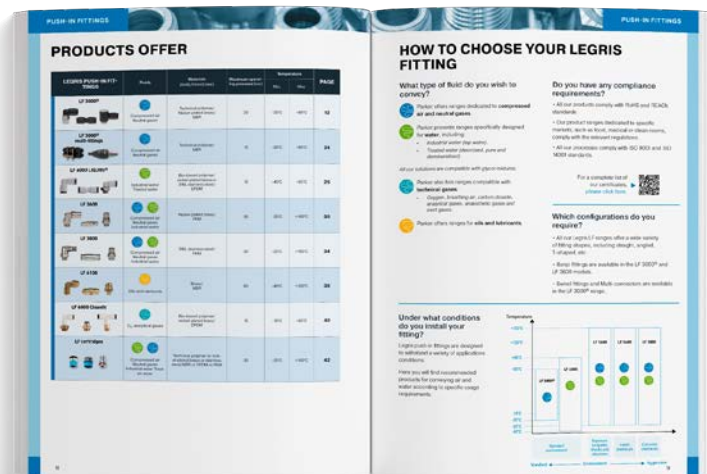


Technical specifications and product benefits

Technical specifications

- Fluids: compressed air, neutral gases, industrial water with or without glycol
- Operating pressure: 10^{-2} millibar to 30 bar (20 bar: 3699, 3609, 3639)
- Operating temperature: -25°C to +150°C
- Diameter: 4 to 14 mm
- Regulations: RoHS, REACH, PED, FDA

Performance depends on the fluids, materials and tube used.

Component materials

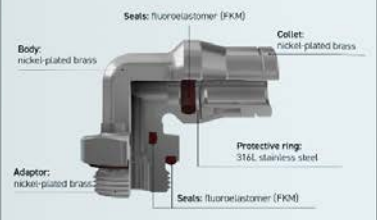

Benefits

- Full metal design in nickel-plated brass to withstand mechanical shocks and sparks.
- Collet fastening system that ensures high pressure resistance.
- High-performance FKM seal ideal for high temperatures.
- Surface treatment reinforced by high phosphorus chemical nickel plating, offering resistance suited to the stringent requirements of the food processing industry.

Recommended applications



Technical information on the installation or use of products

Installation guide

Maximum tightening torque (daN.m)	Threads						
	M5x0.8	M6x1	M8x1	M10x1	G1/8	G1/4	G3/8
	0.16	0.18	0.6	0.8	0.8	1.2	3

Recommended fluids:



Compressed air and neutral gases



Industrial water (tap water)
Treated water (deionised, pure and demineralised)



Technical gases



Oils and lubricants

Colour of the chapter
visible on the spine

Product references:

- Visual identification
- Table of references

QR code for product dimensions



Legris LF 3600

PUSH-IN FITTINGS

3675 Stud Fitting, Male BSPT Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	R1/8	3675 04 10
	R1/4	3675 04 13
	R1/8	3675 06 10
6	R1/4	3675 06 13
	R1/8	3675 08 10
	R1/4	3675 08 13
8	R3/8	3675 08 17
	R1/4	3675 10 13
	R1/2	3675 10 21
10	R3/8	3675 12 17
	R1/2	3675 12 21
	R3/8	3675 14 17
14	R1/2	3675 14 21

3601 Stud Fitting, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	M5x0.8	3601 04 19
	M6x1	3601 04 52
	M8x1	3601 04 56
6	G1/8	3601 04 10
	G1/4	3601 04 13
	M5x0.8	3601 06 19
8	M10x1	3601 06 60
	G1/8	3601 06 10
	G1/4	3601 06 13
10	G3/8	3601 08 17
	G1/4	3601 10 13
	G3/8	3601 10 17
12	G1/2	3601 10 21
	G1/4	3601 12 13
	G3/8	3601 12 17
14	G1/2	3601 12 21
	G3/8	3601 14 17
	G1/2	3601 14 21

3681 Stud Fitting with Internal Hexagon, Male Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	M5x0.8	3681 04 19
	G1/8	3681 04 10
	G1/4	3681 04 13
6	G1/8	3681 06 10
	G1/4	3681 06 13
	G1/8	3681 08 10
8	G1/4	3681 08 13
	G3/8	3681 10 17
	G3/8	3681 12 17
12	G1/2	3681 12 21

3614 Stud Fitting, Female BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	M5x0.8	3614 04 19
	G1/8	3614 04 10
	G1/4	3614 04 13
6	G1/8	3614 06 10
	G1/4	3614 06 13
	G1/8	3614 08 10
8	G1/4	3614 08 13
	G3/8	3614 10 17
	G3/8	3614 12 17
12	G1/2	3614 12 21

3609 Stud Elbow, Male BSPT Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	R1/8	3609 04 10
	R1/4	3609 04 13
	R1/8	3609 06 10
6	R1/4	3609 06 13
	R1/8	3609 08 10
	R1/4	3609 08 13
8	R3/8	3609 08 17
	R1/4	3609 10 13
	R3/8	3609 10 17
10	R1/4	3609 12 13
	R3/8	3609 12 17
	R1/2	3609 12 21
12	R3/8	3609 14 17
	R1/2	3609 14 21
	R3/8	3609 14 21

The body is suitable for positioning purposes. Maximum pressure: 20 bar

3699 Compact Elbow, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	M5x0.8	3699 04 19
	M6x1	3699 04 52
	M8x1	3699 04 56
6	G1/8	3699 04 10
	G1/4	3699 04 13
	M10x1	3699 06 60
8	G1/8	3699 06 10
	G1/4	3699 06 13
	G1/8	3699 08 10
10	G1/4	3699 08 13
	G3/8	3699 08 17
	G1/4	3699 10 13
12	G3/8	3699 10 17
	G1/4	3699 12 13
	G3/8	3699 12 17
14	G1/2	3699 12 21
	G3/8	3699 14 17
	G1/2	3699 14 21

The body is suitable for positioning purposes. Maximum pressure: 20 bar

3618 Single Banjo, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions

OD	C	References
4	M5x0.8	3618 04 19
	G1/8	3618 04 10
	M5x0.8	3618 06 19
6	G1/8	3618 06 10
	G1/4	3618 06 13
	G1/8	3618 08 10
8	G1/4	3618 08 13
	G3/8	3618 10 17
	G3/8	3618 12 17

Maximum temperature: +80°C



PARKER DIVISION LOW PRESSURE CONNECTORS EUROPE

Supplier of solutions for fluid transport, automation and industrial processes.

For over 60 years, the Low Pressure Connectors Europe Division, pioneer of Legris push-in connections and leader in Rectus quick couplers, has been designing, manufacturing and distributing innovative, easy-to-assemble solutions worldwide.

Drawing on proven industrial expertise and continuous innovation, it delivers reliable, high-performance and durable products designed to meet the requirements of the most demanding applications.



PARKER MAKES THE DIFFERENCE:

**A SINGLE PARTNER FOR AIR
AND LIQUIDS**

**PREMIUM QUALITY
RECOGNISED**

**CUTTING-EDGE FRANCO-
GERMAN ENGINEERING**

**100% EUROPEAN INTEGRATED
MANUFACTURING**

**A LOCAL COMMERCIAL PRESENCE
IN EUROPE**

**EXPERT AND RESPONSIVE
TECHNICAL SUPPORT**

TRUE TO OUR VALUES

Industrial excellence, high quality standards and customer focus are at the heart of all our processes.



FIRST-CLASS CUSTOMER EXPERIENCE

As your project partner, LPCE mobilises dedicated teams across Europe to advise you and tackle your technological challenges.

With in-depth knowledge of our customers' needs, the market and industry constraints, we provide technical recommendations and self-service digital resources to help you select the best products for your applications.



ENGINEERING EXPERTISE

For over 60 years, the LPCE division has been recognised for its expertise in sealing, gripping and flow optimisation.

Using state-of-the-art tools - rheology, finite element simulation and flow modelling - we design innovative, high-performance solutions that meet our customers' most stringent technical requirements.



RECOGNISED QUALITY

Quality is at the heart of the entire LPCE process value chain, guaranteeing reliability and peace of mind for our customers.

Our products meet strict technical requirements, guaranteed by advanced production controls - camera inspection and 100% leak testing at the end of the line. Recognised for its excellence, LPCE is committed to complying with industry standards and regulations and keeping pace with their evolution.



EXCELLENCE IN THE PRODUCTION AND SUPPLY CHAIN

LPCE implements an integrated and robust procurement strategy to guarantee excellent customer service.

We mobilise internal capabilities in plastic injection moulding, machining and automated assembly, complemented by multi-sourcing to secure materials and components.

Entirely based in Europe and guided by lean manufacturing principles, our organisation produces high-performance, premium-quality parts, delivered within reliable time frames.

01

THE MARKET BENCHMARK

With over 60 years of experience, Legris LF push-in fittings are the preferred choice for transporting compressed air, gases and liquids.

PREMIUM QUALITY AND RELIABILITY GUARANTEE

Manufactured entirely in Europe and rigorously tested, these fittings ensure a perfect seal and exceptional performance.

A WIDE RANGE AT YOUR FINGERTIPS

With the widest selection of figures on the market, all products are easily accessible through our distribution network.



A close-up photograph of an industrial machine, likely a cable assembly line. The machine features various components, including metal brackets, black cables, and yellow cables. The text "LEGRIS" is visible on a yellow cable. The background is blurred, showing more of the industrial environment.

LEGRIS **PUSH-IN FITTINGS**

PRODUCTS OFFER

LEGRIS PUSH-IN FITTINGS	Fluids	Materials (body/thread/seal)	Maximum operating pressure (bar)	Temperature		PAGE
				Min.	Max.	
LF 3000® 	 Compressed air Neutral gases	Technical polymer/ Nickel-plated brass/ NBR	20	-20°C	+80°C	12
LF 3000® multi-fittings 	 Compressed air Neutral gases	Technical polymer/ NBR	10	-20°C	+80°C	24
LF 6000 LIQUIfit® 	 Industrial water Treated water	Bio-based polymer/ nickel-plated brass or 316L stainless steel/ EPDM	15	-40°C	+95°C	26
LF 3600 	  Compressed air Neutral gases Industrial water	Nickel-plated brass/ FKM	30	-25°C	+150°C	30
LF 3800 	  Compressed air Neutral gases Industrial water	316L stainless steel/ FKM	30	-25°C	+150°C	34
LF 6100 	 Oils and lubricants	Brass/ NBR	60	-40°C	+120°C	38
LF 6800 Cleanfit 	 O ₂ , analytical gases	Bio-based polymer/ nickel-plated brass/ EPDM	15	-10°C	+95°C	40
LF cartridges 	  Compressed air Neutral gases Industrial water Treat- ed water	Technical polymer or nick- el-plated brass or stainless steel/NBR or EPDM or FKM	30	-25°C	+150°C	42

HOW TO CHOOSE YOUR LEGRIS FITTING

What type of fluid do you wish to convey?



Parker offers ranges dedicated to **compressed air and neutral gases**.



Parker presents ranges specifically designed for **water**, including:

- *Industrial water (tap water).*
- *Treated water (deionised, pure and demineralised)*

All our solutions are compatible with glycol mixtures.



Parker also has ranges compatible with **technical gases**:

- *Oxygen, breathing air, carbon dioxide, analytical gases, anaesthetic gases and inert gases.*



Parker offers ranges for **oils and lubricants**.

Do you have any compliance requirements?

- All our products comply with RoHS and REACH standards.
- Our product ranges dedicated to specific markets, such as food, medical or clean rooms, comply with the relevant regulations.
- All our processes comply with ISO 9001 and ISO 14001 standards.

For a complete list of our certificates, [please click here](#).




Which configurations do you require?

- All our Legris LF ranges offer a wide variety of fitting shapes, including straight, angled, T-shaped, etc.
- Banjo fittings are available in the LF 3000® and LF 3600 models.
- Swivel fittings and Multi-connectors are available in the LF 3000® range.

Under what conditions do you install your fitting?





Legris push-in fittings are designed to withstand a variety of applications conditions.

Here you will find recommended products for conveying air and water according to specific usage requirements.

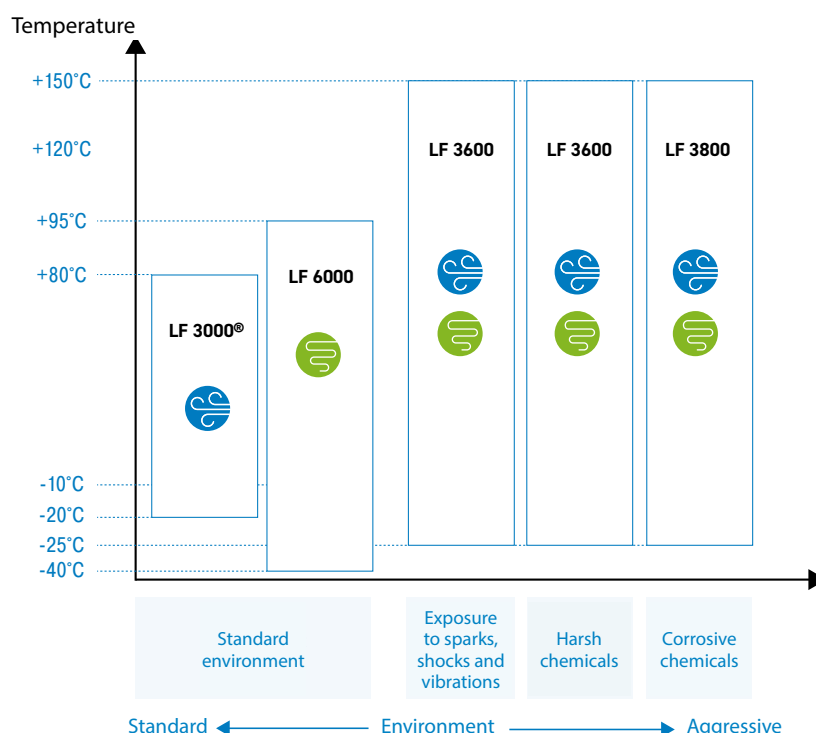


HOW TO CHOOSE YOUR LEGRIS FITTING

How should you install your fitting?

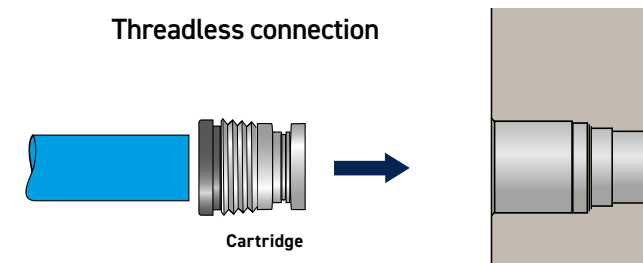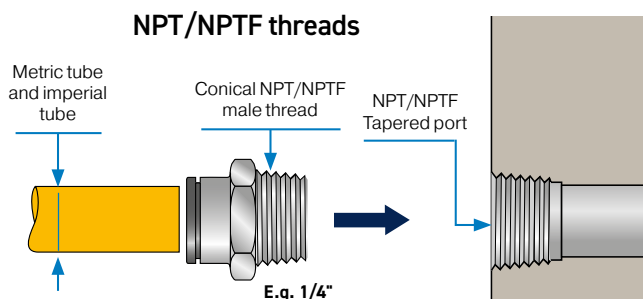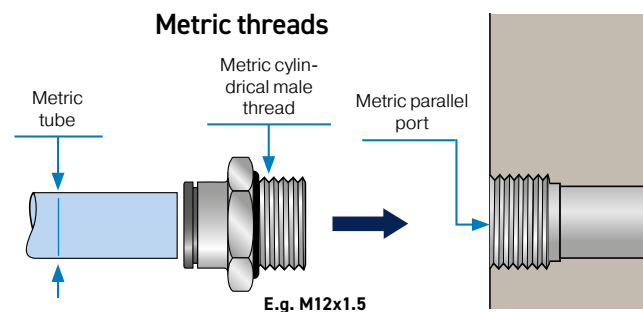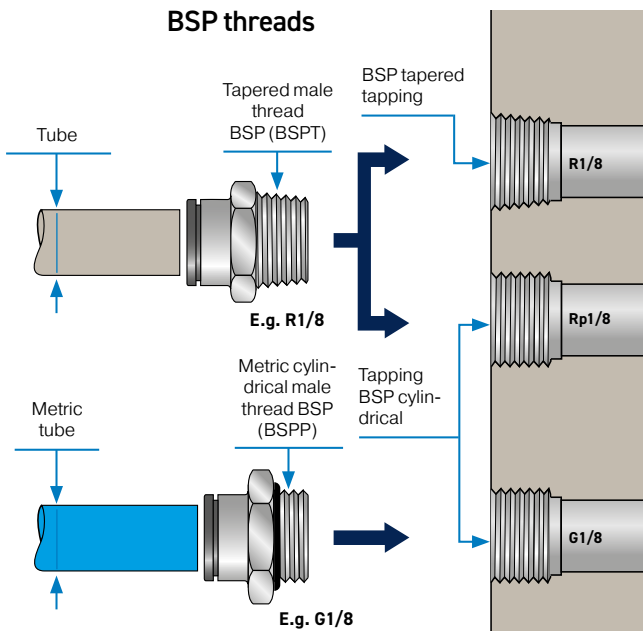

Are you familiar with the fastening technology featured in every Legris range of fittings?


Gripping ring technology



LF 3000®
LF 6000
LF 6800

- No pumping effect
- Ideal for polymer tubes
- Particularly compact


Collet technology



LF 3600
LF 3800

- Robust solution for harsh environments
- Resistant to high pressure, very good endurance
- Ideal for grooved metal tubes

Reverse collet technology



LF 6100

- Accidental disconnection impossible
- Can withstand high pressures
- Double sealing

Which fitting connects best to your tube?

To guarantee optimal sealing performance, Legris push-in fittings and tubes have been developed together. The table opposite shows our recommendations for tube/fitting combinations.

Find the characteristics of our tubes in Chapter 6.

Fitting	Tube
LF 3000®	Polyamide (PA) Polyurethane (PU)
LF 6000	Advanced Polyethylene (APE)
LF 3600	Polyamide (PA) Fluoropolymer (FEP) Spark-resistant PA/PU Anti-static PU
LF 3800	Fluorinated Ethylene Propylene (FEP) Perfluoroalkoxy (PFA)
LF 6100	Rigid polyamide (PA) Metal tubes
LF 6800	Polyurethane (PU.G) Perfluoroalkoxy (PFA)

Part number identification

Part numbers are chosen according to a mnemonic code.

Each fitting is identified by:

- item type (4 digits);
- the nominal diameter of the tube (2 digits) corresponds to the external diameter of the tube;
- the thread code. If the product does not have a thread, the code used is 00.

Item type				Nominal diameter		Thread code			
Body				= outer diameter of the tube					
Designation	Code	Designation	Code	Metric	Code	BSP threading	Code	Metric threading	Code
Stud fitting	01/75	Stud Branch Tee	08/98	3 mm	03	1/8"	10	M3x0.5	09
				4 mm	04	1/4"	13	M5x0.8	19
Equal elbow	02	Tube-to-Tube connector	06	6 mm	06	3/8"	17	M6x1	52
				.../...		1/2"	21	M7x1	55
Stud Run Tee	03/93	Banjo	18/24	16 mm	16	3/4"	27	M8x1	56
				Inches	Code	NPT/NPTF threads			
Equal tee	04	Y equal	40	1/8"	53	1/16"	08	M8x1.25	57
				1/4"	56	1/8"	11	M10x1	60
				3/8"	60	1/4"	14	M10x1.5	62
				1/2"	62	3/8"	18	M12x1	65
						1/2"	22	M12x1.5	67




Ideal fitting for pneumatic applications in standard industrial environments. Invented by Legris in the 1960s, push-in fitting technology provides a **reliable and easy-to-use connection for increased productivity.**

Technical specifications

-  **Fluids:** compressed air and neutral gases
-  **Operating pressure:** 10⁻² millibar to 20 bar
-  **Operating temperature:** -20°C to +80°C
-  **Diameter:** 3 to 16 mm – 1/8" to 1/2"
-  **Regulations:** RoHS, REACH, ISO 14743, PED

Performance depends on the fluids, materials and tube used.

Component materials

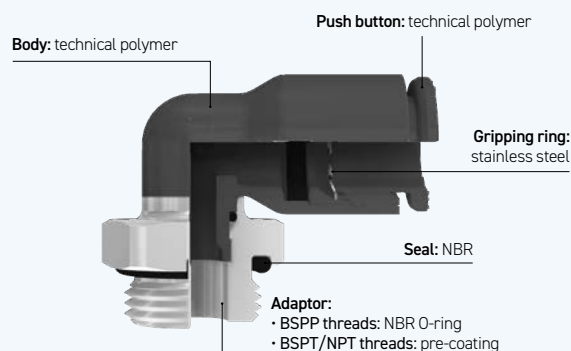

Benefits

Proven push-in connection technology:

- **Robust gripping ring**, tested for endurance without failure over more than 229 million cycles (*test carried out in accordance with ISO 19973*).
- **Patented nitrile seal (NBR)**: the specific shape of the seal reduces connection forces and improves sealing without a pumping effect for both static and dynamic use.
- **Technical polymer reinforced** with fibreglass for improved mechanical and chemical resistance.



Compact solutions to optimise space:

- **Developed to fit into confined spaces**, this design allows for installation without compromising on performance.
- **Includes banjos** that facilitate access and maintenance.

Multiple shapes and sizes for flexible configurations:

- **Over 20 shapes and 8 diameters.**
- **Specific features available:** 360° swivel banjo fittings and oscillating fittings.

Recommended applications

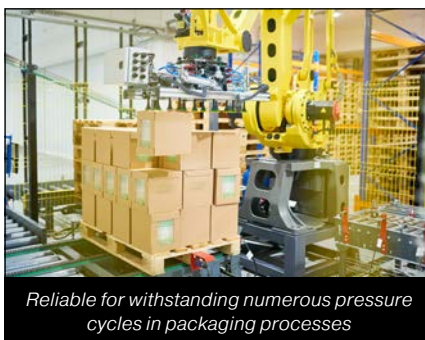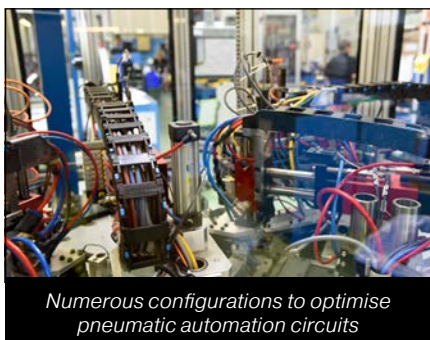



Parker offers 3 versions in the Legris LF 3000® range



► Banjo fittings

Legris LF 3000® banjo fittings can be screwed in from above, making them easy to install in confined spaces, and offer 360° orientation for flexible positioning.

By stacking two or three bodies using a single screw, a wide variety of configurations are possible, including combining different tube diameters.

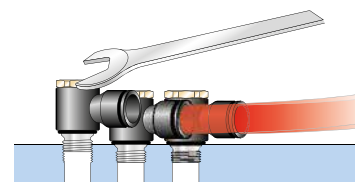


► Swivel fittings

Equipped with anti-friction rings, the fittings rotate when the cylinder is in motion. This eliminates the risk of tube pinching and improves the mechanical integrity and longevity of the fitting-tube assembly.



► Self-sealing fittings

Push-in fittings equipped with a valve that closes automatically when the tube is removed, preventing any air leakage — ideal solution when the circuit pressure cannot be shut off.



Installation guide

LF3000® fittings

Maximum tightening torque (daN.m)	Threads									
	M3x0.5	M5x0.8	M7x1	M10x1	M12x1.5	G1/8	G1/4	G3/8	G1/2	G3/4
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5	5

Banjo fittings

Torque for tightening (daN.m)	Threads					
	M3x0.5	M5x0.8	G1/8	G1/4	G3/8	G1/2
	0.05	0.1	0.4	0.5	0.6	0.7

3175

Stud Fitting, Male BSPT Thread



Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
4	R1/8	3175 04 10
	R1/4	3175 04 13
	R3/8	3175 04 17
6	R1/8	3175 06 10
	R1/4	3175 06 13
	R3/8	3175 06 17
	R1/2	3175 06 21
8	R1/8	3175 08 10
	R1/4	3175 08 13
	R3/8	3175 08 17
	R1/2	3175 08 21
10	R1/8	3175 10 10
	R1/4	3175 10 13
	R3/8	3175 10 17
	R1/2	3175 10 21
12	R1/4	3175 12 13
	R3/8	3175 12 17
	R1/2	3175 12 21
14	R3/8	3175 14 17
	R1/2	3175 14 21
16	R3/8	3175 16 17
	R1/2	3175 16 21

Inch

ØD	C	References
1/8	R1/8	3175 53 10
3/16	R1/8	3175 55 10
	R1/4	3175 55 13
1/4	R1/8	3175 56 10
	R1/4	3175 56 13
	R1/4	3175 60 13
3/8	R3/8	3175 60 17
	R1/2	3175 60 21
	R1/4	3175 62 13
1/2	R3/8	3175 62 17
	R1/2	3175 62 21

Pre-coated thread

3175

Stud Fitting, Male NPT Thread



Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
6	NPT1/8	3175 06 11
	NPT1/4	3175 06 14
10	NPT1/4	3175 10 14
	NPT3/8	3175 10 18
	NPT1/2	3175 10 22
12	NPT3/8	3175 12 18
	NPT1/2	3175 12 22

Inch

ØD	C	References
1/8	NPT1/8	3175 53 11
	NPT1/4	3175 53 14
1/4	NPT1/8	3175 56 11
	NPT1/4	3175 56 14
	NPT3/8	3175 56 18
3/8	NPT1/8	3175 60 11
	NPT1/4	3175 60 14
	NPT3/8	3175 60 18
1/2	NPT3/8	3175 62 18
	NPT1/2	3175 62 22

Pre-coated thread

3114

Stud Fitting, Female BSPP and Metric Thread



Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
4	M5x0.8	3114 04 19
	G1/8	3114 04 10
	G1/4	3114 04 13
6	G1/8	3114 06 10
	G1/4	3114 06 13
8	G1/8	3114 08 10
	G1/4	3114 08 13
	G3/8	3114 08 17
10	G1/4	3114 10 13
	G3/8	3114 10 17
	G1/2	3114 10 21
12	G3/8	3114 12 17
	G1/2	3114 12 21
14	G3/8	3114 14 17
16	G1/2	3114 16 21

3101

Stud Fitting, Male BSPP and Metric Thread



Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
3	M3x0.5	3101 03 09*
	M5x0.8	3101 03 19
4	M3x0.5	3101 04 09*
	M5x0.8	3101 04 19
	M7x1	3101 04 55
	G1/8	3101 04 10
	G1/4	3101 04 13
6	M5x0.8	3101 06 19
	M7x1	3101 06 55
	M10x1	3101 06 60
	M12x1.5	3101 06 67
	G1/8	3101 06 10
	G1/4	3101 06 13
8	G3/8	3101 06 17
	G1/2	3101 06 21
	M10x1	3101 08 60
	M12x1.5	3101 08 67
	G1/8	3101 08 10
	G1/4	3101 08 13
	G3/8	3101 08 17
	G1/2	3101 08 21
10	G1/4	3101 10 13
	G3/8	3101 10 17
	G1/2	3101 10 21
12	G1/4	3101 12 13
	G3/8	3101 12 17
	G1/2	3101 12 21
14	G3/8	3101 14 17
	G1/2	3101 14 21
16	G3/8	3101 16 17
	G1/2	3101 16 21

*Bi-material seal

3181/3281

Stud Fitting Round Body, Male Metric Thread



Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
3	M3x0.5	3281 03 09
	M5x0.8	3281 03 19
4	M5x0.8	3181 04 19
	M7x1	3181 04 55
6	M5x0.8	3181 06 19
	M7x1	3181 06 55

Thanks to its internal hexagon drive and its round external shape, the 3181 model enables very compact installations.

3109

Stud Elbow, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3109 04 10
	R1/4	3109 04 13
	R3/8	3109 04 17
6	R1/8	3109 06 10
	R1/4	3109 06 13
	R3/8	3109 06 17
8	R1/2	3109 06 21
	R1/8	3109 08 10
	R1/4	3109 08 13
10	R3/8	3109 08 17
	R1/2	3109 08 21
	R1/8	3109 10 10
12	R1/4	3109 10 13
	R3/8	3109 10 17
	R1/2	3109 10 21
14	R1/4	3109 12 13
	R3/8	3109 12 17
	R1/2	3109 12 21
16	R3/8	3109 14 17
	R1/2	3109 14 21
	R3/8	3109 16 17
	R1/2	3109 16 21

Inch

ØD	C	References
1/8	R1/8	3109 53 10
	R1/8	3109 04 10
5/32	R1/4	3109 04 13
	R3/8	3109 04 17
1/4	R1/8	3109 56 10
	R1/4	3109 56 13
	R1/8	3109 08 10
5/16	R1/4	3109 08 13
	R3/8	3109 08 17
	R1/2	3109 08 21
3/8	R1/4	3109 60 13
	R3/8	3109 60 17
1/2	R1/2	3109 62 21

Pre-coated thread
The body swivels for positioning purposes

3129

Extended Stud Elbow, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3129 04 10
	R1/4	3129 04 13
6	R1/8	3129 06 10
	R1/4	3129 06 13
8	R1/8	3129 08 10
	R1/4	3129 08 13
	R3/8	3129 08 17
10	R1/4	3129 10 13
	R3/8	3129 10 17
	R1/2	3129 10 21
12	R1/4	3129 12 13
	R3/8	3129 12 17
14	R1/2	3129 12 21
	R3/8	3129 14 17
	R1/2	3129 14 21

Pre-coated thread
The body swivels for positioning purposes

3113

45° Elbow, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3113 04 10
6	R1/8	3113 06 10
	R1/4	3113 06 13
8	R1/8	3113 08 10
	R1/4	3113 08 13
10	R3/8	3113 08 17
	R1/4	3113 10 13
	R3/8	3113 10 17
12	R1/2	3113 10 21
	R1/4	3113 12 13
	R3/8	3113 12 17
	R1/2	3113 12 21

Pre-coated thread
The body swivels for positioning purposes
This model prevents distortion of the tube.

3109

Stud Elbow, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	NPT1/8	3109 04 11
	NPT1/4	3109 04 14
6	NPT1/8	3109 06 11
	NPT1/4	3109 06 14
8	NPT1/8	3109 08 11
	NPT1/4	3109 08 14
10	NPT1/4	3109 10 14
	NPT3/8	3109 10 18
	NPT1/2	3109 10 22
12	NPT1/2	3109 12 22

Inch

ØD	C	References
1/8	NPT1/8	3109 53 11
	NPT1/4	3109 53 14
5/32	NPT1/8	3109 04 11
	NPT1/8	3109 56 11
1/4	NPT1/4	3109 56 14
	NPT1/8	3109 08 11
5/16	NPT1/4	3109 08 14
	NPT1/4	3109 60 14
3/8	NPT3/8	3109 60 18
	NPT3/8	3109 62 18
1/2	NPT1/2	3109 62 22

Pre-coated thread
The body swivels for positioning purposes

3133

45° Elbow, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	M5x0.8	3133 04 19
	G1/8	3133 04 10
6	M5x0.8	3133 06 19
	G1/8	3133 06 10
8	G1/4	3133 06 13
	G1/8	3133 08 10
	G1/4	3133 08 13
10	G3/8	3133 08 17
	G1/4	3133 10 13
	G3/8	3133 10 17
	G1/2	3133 10 21
12	G1/4	3133 12 13
	G3/8	3133 12 17
	G1/2	3133 12 21

The body swivels for positioning purposes
This model prevents distortion of the tube.

3199/3299**Stud Elbow, Male BSPP and Metric Thread**

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
3	M3x0.5	3199 03 09*
	M3x0.5	3299 03 09**
	M5x0.8	3199 03 19
	M5x0.8	3299 03 19**
4	M3x0.5	3199 04 09*
	M5x0.8	3199 04 19
	M7x1	3199 04 55
	G1/8	3199 04 10
	G1/4	3199 04 13
	M5x0.8	3199 06 19
6	M7x1	3199 06 55
	M10x1	3199 06 60
	M12x1.5	3199 06 67
	G1/8	3199 06 10
	G1/4	3199 06 13
	G3/8	3199 06 17
	G1/2	3199 06 21
	M10x1	3199 08 60
8	M12x1.5	3199 08 67
	G1/8	3199 08 10
	G1/4	3199 08 13
	G3/8	3199 08 17
	G1/2	3199 08 21
	G1/4	3199 10 13
10	G3/8	3199 10 17
	G1/2	3199 10 21
12	G1/4	3199 12 13
	G3/8	3199 12 17
14	G1/2	3199 12 21
	G3/8	3199 14 17
16	G1/2	3199 14 21
	G3/8	3199 16 17
	G1/2	3199 16 21

The body swivels for positioning purposes

*Bi-material seal

**LF 3200 in nickel-plated brass, NBR, PTFE ring

3169**Extended Stud Elbow, Male BSPP and Metric Thread**

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	M5x0.8	3169 04 19
	G1/8	3169 04 10
	G1/4	3169 04 13
	M5x0.8	3169 06 19
6	M7x1	3169 06 55
	G1/8	3169 06 10
	G1/4	3169 06 13
	G1/8	3169 08 10
8	G1/4	3169 08 13
	G3/8	3169 08 17
	G1/4	3169 10 13
	G3/8	3169 10 17
10	G1/2	3169 10 21
	G1/4	3169 12 13
	G3/8	3169 12 17
	G1/2	3169 12 21
14	G3/8	3169 14 17
	G1/2	3169 14 21
16	G3/8	3169 16 17
	G1/2	3169 16 21

The body swivels for positioning purposes

3108**Stud Branch Tee, Male BSPT Thread**

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3108 04 10
	R1/4	3108 04 13
6	R1/8	3108 06 10
	R1/4	3108 06 13
8	R1/8	3108 08 10
	R1/4	3108 08 13
	R3/8	3108 08 17
	R1/4	3108 10 13
10	R3/8	3108 10 17
	R1/2	3108 10 21
12	R1/4	3108 12 13
	R3/8	3108 12 17
	R1/2	3108 12 21
	R3/8	3108 14 17
14	R1/2	3108 14 21
	R3/8	3108 16 17
16	R1/2	3108 16 21

Pre-coated thread

The body swivels for positioning purposes

3192**Stud Elbow, Female BSPP Thread**

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	G1/8	3192 04 10
	G1/4	3192 04 13
6	G1/8	3192 06 10
	G1/4	3192 06 13
8	G1/8	3192 08 10
	G1/4	3192 08 13
	G3/8	3192 08 17
	G1/4	3192 10 13
10	G3/8	3192 10 17
	G1/2	3192 10 21
	G1/4	3192 12 13
12	G3/8	3192 12 17
	G1/2	3192 12 21

The body swivels for positioning purposes

3198/3298**Stud Branch Tee, Male BSPP and Metric Thread**

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
3	M3x0.5	3298 03 09*
	M5x0.8	3298 03 19*
4	M5x0.8	3198 04 19
	G1/8	3198 04 10
	G1/4	3198 04 13
	M5x0.8	3198 06 19
6	G1/8	3198 06 10
	G1/4	3198 06 13
8	G1/8	3198 08 10
	G1/4	3198 08 13
	G3/8	3198 08 17
	G1/4	3198 10 13
10	G3/8	3198 10 17
	G1/2	3198 10 21
12	G1/4	3198 12 13
	G3/8	3198 12 17
14	G1/2	3198 12 21
	G3/8	3198 14 17
	G1/2	3198 14 21
	G3/8	3198 16 17
16	G1/2	3198 16 21

The body swivels for positioning purposes

*LF 3200 in nickel-plated brass, NBR, PTFE ring

3103

Stud Run Tee, BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3103 04 10
	R1/4	3103 04 13
6	R1/8	3103 06 10
	R1/4	3103 06 13
8	R1/8	3103 08 10
	R1/4	3103 08 13
	R3/8	3103 08 17
10	R1/4	3103 10 13
	R3/8	3103 10 17
	R1/2	3103 10 21
12	R1/4	3103 12 13
	R3/8	3103 12 17
14	R1/2	3103 12 21
	R1/2	3103 14 21
16	R1/2	3103 16 21

Pre-coated thread
The body swivels for positioning purposes

3158

Y Piece, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	M5x0.8	3158 04 19
	M5x0.8	3158 06 19
6	G1/8	3158 06 10
	G1/4	3158 06 13
8	G1/8	3158 08 10
	G1/4	3158 08 13
	G3/8	3158 08 17
10	G1/4	3158 10 13
	G3/8	3158 10 17
	G1/2	3158 10 21
12	G3/8	3158 12 17
	G1/2	3158 12 21

The body swivels for positioning purposes

3144

Equal and Unequal Multiple Y Piece

Technical polymer, NBR



ØD	ØD1	References
4	4	3144 04 04
	6	3144 04 06
6	6	3144 06 06
	8	3144 06 08

3193/3293

Stud Run Tee, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
3	M5x0.8	3293 03 19
4	M5x0.8	3193 04 19
	G1/8	3193 04 10
6	G1/4	3193 04 13
	M5x0.8	3193 06 19
8	G1/8	3193 06 10
	G1/4	3193 06 13
10	G1/8	3193 08 10
	G3/8	3193 08 17
12	G1/4	3193 10 13
	G1/2	3193 10 21
14	G1/4	3193 12 13
	G3/8	3193 12 17
16	G1/2	3193 12 21
	G3/8	3193 14 17
16	G1/2	3193 14 21
	G3/8	3193 16 17
16	G1/2	3193 16 21

The body swivels for positioning purposes

3132

Double Y, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	G1/4	3132 04 13
6	G1/4	3132 06 13

The body swivels for positioning purposes

3148

Y Piece, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3148 04 10
	R1/4	3148 04 13
6	R1/8	3148 06 10
	R1/4	3148 06 13
8	R1/8	3148 08 10
	R1/4	3148 08 13
	R3/8	3148 08 17
10	R1/4	3148 10 13
	R3/8	3148 10 17
	R1/2	3148 10 21
12	R3/8	3148 12 17
	R1/2	3148 12 21

Pre-coated thread
The body swivels for positioning purposes

3143

Multiple Plug-In Y Piece

Technical polymer, Nickel-plated brass, NBR



ØD1	ØD2	References
4	6	3143 04 06
	8	3143 04 08
6	8	3143 06 08

3106/3206

Equal and Unequal Tube-to-Tube Connector



Technical polymer, NBR

Scan for more dimensions



ØD	ØD1	References
3	3	3106 03 00
		3206 03 00*
	4	3106 03 04
4	1/4	3106 04 56
	4	3106 04 00
	6	3106 04 06
	8	3106 04 08
6	1/4	3106 06 56
	6	3106 06 00
	8	3106 06 08
	10	3106 06 10
	8	3106 08 00
8	10	3106 08 10
	12	3106 08 12
	10	3106 10 00
10	12	3106 10 12
	1/2	3106 12 62
	12	3106 12 00
12	14	3106 12 14
	16	3106 12 16
14	14	3106 14 00
16	16	3106 16 00

* LF 3200 in Nickel-plated brass, NBR

Inch

ØD	ØD1	References
5/32	5/32	3106 04 00
1/4	1/4	3106 56 00
5/16	8	3106 08 00
	3/8	3106 60 00
3/8	10	3106 60 10
	1/4	3106 60 56
1/2	1/2	3106 62 00

3140

Equal and Unequal Single Y Piece



Technical polymer, NBR

Scan for more dimensions



ØD	ØD1	References
4	4	3140 04 00
	6	3140 04 06
6	6	3140 06 00
	8	3140 06 08
8	8	3140 08 00
	10	3140 08 10
10	10	3140 10 00
	12	3140 10 12
12	12	3140 12 00

3102/3202

Equal and Unequal Elbow



Technical polymer, NBR

Scan for more dimensions



ØD	ØD1	References
4	3	3202 03 00*
	4	3102 04 00
	6	3102 04 06
6	6	3102 06 00
	8	3102 06 08
8	8	3102 08 00
	10	3102 08 10
10	10	3102 10 00
	12	3102 10 12
12	12	3102 12 00
14	14	3102 14 00
16	16	3102 16 00

Inch

ØD	ØD1	References
5/32	5/32	3102 04 00
1/4	1/4	3102 56 00
5/16	5/16	3102 06 00
3/8	3/8	3102 60 00
1/2	1/2	3102 62 00

* LF 3200 in Nickel-plated brass, NBR

3104/3204

Equal and Unequal Tee



Technical polymer, NBR

Scan for more dimensions



ØD	ØD1	References
3	3	3104 03 00
		3204 03 00*
4	4	3104 04 00
	6	3104 04 06
	4	3104 06 04
6	6	3104 06 00
	8	3104 06 08
	4	3104 08 04
	6	3104 08 06
8	8	3104 08 00
	10	3104 08 10
	4	3104 10 04
	8	3104 10 08
10	10	3104 10 00
	12	3104 10 12
	4	3104 12 04
12	10	3104 12 10
	12	3104 12 00
14	8	3104 14 08
	14	3104 14 00
16	12	3104 16 12
	16	3104 16 00

* LF 3200 in Nickel-plated brass, NBR

Inch

ØD	ØD1	References
5/32	5/32	3104 04 00
1/8	1/8	3104 53 00
1/4	1/4	3104 56 00
	1/8	3104 56 53
5/16	5/16	3104 08 00
3/8	1/4	3104 60 56
	3/8	3104 60 00
1/2	1/2	3104 62 00
	3/8	3104 62 60

3107

Equal and Unequal Cross



Technical polymer, NBR

Scan for more dimensions



ØD	ØD1	ØD2	References
4	4	4	3107 04 00
6	4	6	3107 04 06
4	4	6	3107 06 04
6	6	6	3107 06 00
8	6	8	3107 06 08
6	6	8	3107 08 06
8	8	8	3107 08 00

3304

Multiple Tee



Technical polymer, NBR



ØD1	ØD2	References
6	4	3304 06 04
8	4	3304 08 04
	6	3304 08 06
10	6	3304 10 06
	8	3304 10 08

3306

90° Multiple Elbow



Technical polymer, NBR



ØD1	ØD2	References
6	4	3306 06 04
8	4	3306 08 04
	6	3306 08 06
10	6	3306 10 06
	8	3306 10 08

3166/3266

Plug-In Reducer



Technical polymer, NBR



ØD1	ØD2	References
3	4	3166 03 04
		3266 03 04*
4	6	3166 04 06
	8	3166 04 08
	10	3166 04 10
6	8	3166 06 08
	10	3166 06 10
	12	3166 06 12
	14	3166 06 14
8	10	3166 08 10
	12	3166 08 12
	14	3166 08 14
10	12	3166 10 12
12	14	3166 12 14

* LF 3200 in nickel-plated brass

3168

Plug-In Increaser



Technical polymer, NBR



ØD1	ØD2	References
6	4	3168 06 04
8	6	3168 08 06
	1/4	3168 08 56
10	8	3168 10 08
12	10	3168 12 10

3121

Stud Standpipe, Male BSPT Thread



Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	R1/8	3121 04 10
6	R1/8	3121 06 10
	R1/4	3121 06 13
8	R1/8	3121 08 10
	R1/4	3121 08 13
10	R1/4	3121 10 13
	R3/8	3121 10 17
12	R3/8	3121 12 17

Pre-coated thread

3131

Stud Standpipe, Male BSPP and Metric Thread



Technical polymer, Nickel-plated brass, NBR



ØD	C	References
4	M5x0.8	3131 04 19
	G1/8	3131 04 10
6	G1/8	3131 06 10
	G1/4	3131 06 13
	G1/8	3131 08 10
8	G1/4	3131 08 13
	G3/8	3131 08 17
10	G1/4	3131 10 13
	G3/8	3131 10 17
	G1/2	3131 10 21
12	G1/2	3131 12 21
14	G1/2	3131 14 21

3180**45° Plug-In Equal Elbow**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3180 04 00
6	6	3180 06 00
8	8	3180 08 00
10	10	3180 10 00
12	12	3180 12 00

3184**Extended Equal and Unequal Plug-In Elbow**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3184 04 00
	6	3184 04 06
6	6	3184 06 00
	8	3184 06 08
8	8	3184 08 00
	10	3184 08 10
10	10	3184 10 00
	12	3184 10 12
12	12	3184 12 00

The Ø4 and Ø12 versions are not grooved as standard.

3182**Equal and Unequal Plug-In Elbow**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3182 04 00
4	6	3182 04 06
6	4	3182 06 04
	6	3182 06 00
8	8	3182 06 08
	10	3182 08 00
10	10	3182 08 10
	12	3182 10 00
12	12	3182 12 00

The Ø4 and Ø12 versions are not grooved as standard.

Inch

ØD1	ØD2	References
1/4	1/4	3182 56 00
3/8	3/8	3182 60 00
5/32	5/32	3182 04 00
1/4	1/4	3182 56 00
5/16	5/16	3182 08 00
3/8	3/8	3182 60 00

3183**Equal and Unequal Plug-In Run Tee**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3183 04 00
	6	3183 04 06
6	6	3183 06 00
	8	3183 06 08
8	8	3183 08 00
	10	3183 08 10
10	10	3183 10 00
12	12	3183 12 00

3188**Equal and Unequal Plug-In Branch Tee**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3188 04 00
	6	3188 04 06
6	6	3188 06 00
	8	3188 06 08
8	8	3188 08 00
	10	3188 08 10
10	10	3188 10 00
	12	3188 10 12
12	12	3188 12 00

3142**Equal and Unequal Plug-In Single Y Piece**

Technical polymer, NBR



Scan for more dimensions



ØD1	ØD2	References
4	4	3142 04 00
	6	3142 04 06
6	6	3142 06 00
	8	3142 06 08
8	8	3142 08 00
	10	3142 08 10
10	10	3142 10 00
	12	3142 10 12
12	12	3142 12 00

3120**Stem Connector**

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3120 04 00
6	3120 06 00
8	3120 08 00
10	3120 10 00
12	3120 12 00
14	3120 14 00

3122**Plug-In Barb Connector**

Technical polymer, NBR



Scan for more dimensions



ØD1	I.D. tube	References
4	3.2	3122 04 53
	5	3122 04 05
6	5	3122 06 05
	6.3	3122 08 56
8	8	3122 08 08
	6.3	3122 10 56
10	8	3122 10 08
	8	3122 12 08
12	10	3122 12 10
	12.5	3122 12 62
14	12.5	3122 14 62

3116

Equal Bulkhead Connector

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3116 04 00
6	3116 06 00
8	3116 08 00
10	3116 10 00
12	3116 12 00
14	3116 14 00

3136

Bulkhead Connector, Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	3136 04 10
	G1/4	3136 04 13
6	G1/8	3136 06 10
	G1/4	3136 06 13
	G3/8	3136 06 17
8	G1/8	3136 08 10
	G1/4	3136 08 13
10	G3/8	3136 10 17
12	G3/8	3136 12 17
	G1/2	3136 12 21
16	G3/8	3136 16 17*
	G1/2	3136 16 21*

* Nickel plated nut

3139

Equal Bulkhead Elbow

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	3139 04 00
6	3139 06 00
8	3139 08 00
10	3139 10 00
12	3139 12 00
14	3139 14 00

The body swivels for positioning purposes

3146

Equal Mixed Bulkhead Connector

Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	3146 04 00
6	3146 06 00
8	3146 08 00
10	3146 10 00
12	3146 12 00
14	3146 14 00

Combination of a push-in fitting and a compression fitting.

3126

Blanking Plug

Technical polymer, NBR



Scan for more dimensions



ØD	References
3	3126 03 00
4	3126 04 00
6	3126 06 00
8	3126 08 00
10	3126 10 00
12	3126 12 00
14	3126 14 00
16	3126 16 00*

*Nickel-plated brass

3151

End Cap

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3151 04 00
6	3151 06 00
8	3151 08 00
10	3151 10 00
12	3151 12 00
14	3151 14 00

Inch

ØD	References
5/32	3126 04 00
1/4	3126 56 00
5/16	3126 08 00
3/8	3126 60 00
1/2	3126 62 00

Banjos LF3000® Fittings

3018

Single Banjo, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	R1/8	3018 06 10
	R1/4	3018 06 13
8	R1/8	3018 08 10
	R1/4	3018 08 13
10	R1/4	3018 10 13
	R3/8	3018 10 17
12	R1/4	3018 12 13
	R3/8	3018 12 17

Pre-coated thread

3118

Single Banjo, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
3	M3x0.5	3118 03 09*
4	M5x0.8	3118 04 19*
	G1/8	3118 04 10
6	M5x0.8	3118 06 19*
	G1/8	3118 06 10
8	G1/4	3118 06 13
	G1/8	3118 08 10
10	G1/4	3118 08 13
	G3/8	3118 08 17
12	G1/4	3118 10 13
	G3/8	3118 10 17
12	G1/2	3118 10 21
	G3/8	3118 12 17
12	G1/2	3118 12 21

* With screwdriver slot

3218

Single Banjo, Male Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
3	M3x0.5	3218 03 09
	M5x0.8	3218 03 19

3149

Twin Banjo, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	3149 04 19*
	G1/8	3149 04 10
6	G1/8	3149 06 10
	G1/4	3149 06 13
8	G1/4	3149 08 13
	G3/8	3149 08 17
10	G3/8	3149 10 17

* With screwdriver slot

3119

Double Banjo, BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	3119 04 19*
6	G1/8	3119 06 10
	G1/4	3119 06 13
8	G1/4	3119 08 13
	G3/8	3119 08 17

* With screwdriver slot

3124

Single Banjo, Male/Female BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	3124 04 10
6	G1/4	3124 06 13
8	G3/8	3124 08 17

This product family was developed to allow assembly of a function fitting on a cylinder.

3538

Single Banjo Bodies

Technical polymer, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	3538 04 19
	G1/8	3538 04 10
6	M5x0.8	3538 06 19
	G1/8	3538 06 10
8	G1/4	3538 06 13
	G1/8	3538 08 10
10	G1/4	3538 08 13
	G3/8	3538 08 17
12	G1/4	3538 10 13
	G3/8	3538 10 17
12	G3/8	3538 12 17

3549

Twin Banjo Bodies

Technical polymer, NBR



Scan for more dimensions



ØD	C	References
4	G1/4	3549 04 13
	G1/8	3549 06 10
6	G1/4	3549 06 13
	G3/8	3549 06 17
8	G1/4	3549 08 13
	G3/8	3549 08 17
10	G3/8	3549 10 17

3539

Double Banjo Bodies

Technical polymer, NBR



Scan for more dimensions



ØD	C	References
6	G1/8	3539 06 10
	G1/4	3539 06 13
8	G1/4	3539 08 13

3527

Single Banjo Bolts, Male BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
M5x0.8	3527 00 19*
G1/8	3527 00 10
G1/4	3527 00 13
G3/8	3527 00 17

* With screwdriver slot

3529

Stacking Banjo for 3 Body High Modules, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/8	3529 00 10
G1/4	3529 00 13
G3/8	3529 00 17

3524

Threaded Banjo Bolts, Male/Female BSPP

Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/8	3524 00 10
G1/4	3524 00 13
G3/8	3524 00 17
G1/2	3524 00 21

3528

Stacking Banjo for 2 Body High Modules, Male BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions




C	References
M5x0.8	3528 00 19*
G1/8	3528 00 10
G1/4	3528 00 13
G3/8	3528 00 17

* With screwdriver slot

Installation Guide

1. Remove the O-ring
2. Insert the banjo body with the chamfer oriented upwards (see detail view)
3. Reinstall the O-ring

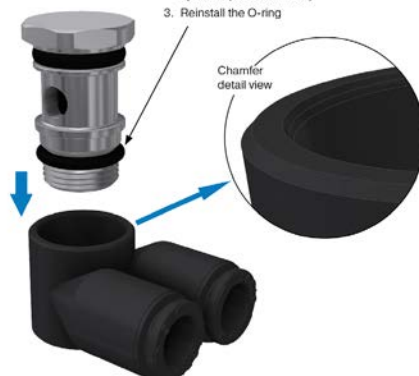

Legris LF 3000® Oscillating Fittings

3159

Oscillating Elbow, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	R1/8	3159 04 10
6	R1/8	3159 06 10
	R1/4	3159 06 13
	R1/8	3159 08 10
8	R1/4	3159 08 13
	R3/8	3159 08 17
10	R1/4	3159 10 13
	R3/8	3159 10 17
12	R1/4	3159 12 13
	R3/8	3159 12 17

Pre-coated thread

3189

Oscillating Elbow, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	3189 04 19
	G1/8	3189 04 10
	M5x0.8	3189 06 19
6	G1/8	3189 06 10
	G1/4	3189 06 13
	G1/8	3189 08 10
8	G1/4	3189 08 13
	G3/8	3189 08 17
10	G1/4	3189 10 13
	G3/8	3189 10 17
12	G1/4	3189 12 13
	G3/8	3189 12 17

Legris LF 3000® Self-Sealing Fittings

3091

Self-Sealing Stud Fitting, Male BSPT Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	R1/8	3091 04 10
6	R1/8	3091 06 10
	R1/8	3091 08 10
8	R1/4	3091 08 13

Maximum operating pressure: 10 bar.

3160

Self-Sealing Plug-In Fitting

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3160 04 00
6	3160 06 00
8	3160 08 00

Maximum operating pressure: 10 bar.

3391

Self-Sealing Stud Fitting, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	3391 04 10
6	G1/8	3391 06 10
8	G1/8	3391 08 10
	G1/4	3391 08 13
10	G3/8	3391 10 17

Maximum operating pressure: 10 bar.



Legris LF 3000® Plug-In Connectors are designed to connect and disconnect a bundle of tubes simultaneously without risk of error, thus facilitating maintenance.

Technical specifications

-  **Fluids:** compressed air and neutral gases
-  **Operating pressure:** 10⁻² millibar to 10 bar
-  **Operating temperature:** -20°C to +80°C
-  **Diameter:** 4 to 8 mm
-  **Regulations:** RoHS, REACH, ISO 14743, PED

Performance depends on the fluids, materials and tube used.

Benefits

- **Reduced connection space** to a minimum of 12 tubes.
- **Prevents assembly errors:** each tube outlet is numbered to facilitate installation. A positioning pin prevents assembly errors.
- **3 solutions:** modular in-line fitting, cylindrical fitting or DIN rail terminal block.

Panel mounted Multi-connectors

The two common uses for this product are:

- 1-** Fixing one half to a machine or through a partition, allowing the other half to be assembled or disassembled for maintenance. Often, when transporting machinery, air hoses are disconnected, and this connection provides a foolproof method of reconnecting them in place.
- 2-** The use of the inline fitting allows long lengths of tubing to be joined together, which must be disconnected periodically.


It is advisable to limit the length of the mobile unit to five fittings.
The fixed portion is not limited.

Connector customisation

By reversing the module units during installation, it is possible to "offset" them so that they cannot be inadvertently connected in the wrong direction.

Contents of a box:


- 10 hermaphroditic modules
- 20 assembly pins and 4 end pins
- 4 fixing brackets
- 4 coupler clips
- 1 removal fork



Standard assembly

Custom assembly

Recommended applications

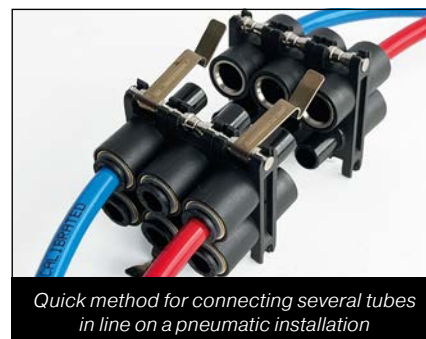

3300

Modular Plug-In Connector

Technical polymer, NBR



Scan for more dimensions




ØD	References
4	3300 04 00
6	3300 06 00
8	3300 08 00

Clearance hole for Ø3 mm screw

Cylindrical multi-connector

This range is particularly suitable for partition wall crossings. A protective cover guides the tubes and protects the connections.

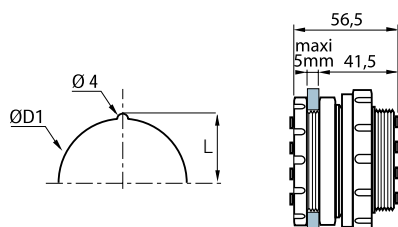

Overall dimensions of the bulkhead multi-connector

Number of tube outlets	L	ØD1
2	17	32.5
4-7	21	40.5
12	30.3	58.5

Recommended applications



Cylindrical multi-connector for mounting on a partition in industrial equipment

3320

Multi-Connector Male Screw Body

Technical polymer, NBR



Scan for more dimensions



ØD	C	C1	References
4	M46x1.5	M40x1.5	3320 04 00 04
	M46x1.5	M40x1.5	3320 04 00 07
	M65x1.5	M58x1.5	3320 04 00 12
6	M46x1.5	M40x1.5	3320 06 00 04
	M46x1.5	M40x1.5	3320 06 00 07

The number of male body outlets must correspond to the same number of outlets on the female body.

3321

Multi-Connector Female Screw Body

Technical polymer, NBR



Scan for more dimensions



ØD	C	C1	References
4	M46x1.5	M40x1.5	3321 04 00 04
	M46x1.5	M40x1.5	3321 04 00 07
	M65x1.5	M58x1.5	3321 04 00 12
6	M46x1.5	M40x1.5	3321 06 00 04
	M46x1.5	M40x1.5	3321 06 00 07

The number of female body outlets must correspond to the same number of outlets on the male body.

3329

Multi-Connector Screw Cap

Technical polymer



Scan for more dimensions



C	References
M40x1.5	3329 00 02
M58x1.5	3329 00 03

Multi-connector terminal block on DIN rail

Identification of tubes

Slots are provided to accommodate label holders, allowing the tubes to be identified.

Pressure indicator

Being able to detect the presence of air is an important consideration when maintaining pneumatic systems.

Legris terminal blocks incorporate pressure indicators that spring back after being pressed manually, indicating the presence of air in the system.

Recommended applications



Mounting terminal blocks on a standard DIN rail with visible pressure indicator

3379

DIN Rail Connector for 2 Tubes

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3379 04 00
6	3379 06 00
8	3379 08 00

Pressure indicator for the system.

3381

DIN Rail Connector for 3 Tubes

Technical polymer, NBR



Scan for more dimensions



ØD	References
4	3381 04 00
6	3381 06 00
8	3381 08 00

Pressure indicator for the system.



Recommended for water transfer applications, the **LF 6000 LIQUIFIT®** range guarantees reliable and compact connections. Manufactured from high-performance bio-based polymer, these fittings contribute to the use of non-fossil resources, thereby preserving the environment.

Technical specifications



Fluid: industrial water, treated water with or without glycol.



Operating pressure: 1 to 16 bar



Operating temperature: -40 °C to +95 °C




Diameter: 4 to 16 mm – 1/4" to 1/2"



Regulations: RoHS, REACH, FDA, CE N° 1935/2004

Performance depends on the fluids, materials and tube used.

Component materials

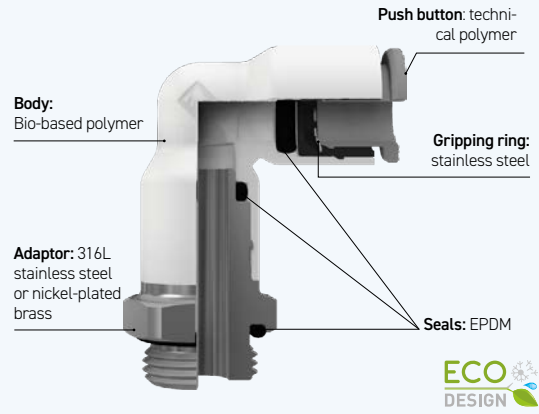

Benefits

- **High performance for complete peace of mind:** very high level of watertightness with the lowest pumping effect on the market at only 0.2 mm.
- **Compact product:** 20 to 40% more compact than competitors.
- **Robust:** suitable for demanding cooling and industrial applications thanks to 316L stainless steel and nickel-plated brass adaptors.
- **Reliable for maintaining the integrity of the conveyed fluid:** inert polymer free of bisphenol and phthalates, protecting the fluid from any migration of hazardous particles.
- **Environmentally friendly:** sustainable product using a bio-based polymer that generates five times less CO² during its life cycle.

Recommended applications



Installation guide

Maximum tightening torque (daN.m)	M5x0.8	G1/8	G1/4	G3/8	G1/2	G3/4
	0.16	0.8	1.2	3	3.5	5

6975

Stud Fitting, Male BSPT Thread

Stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
6	R1/8	6975 06 10
	R1/4	6975 06 13
8	R1/8	6975 08 10
	R1/4	6975 08 13
10	R1/4	6975 10 13
	R1/2	6975 10 21
12	R3/8	6975 12 17
	R1/2	6975 12 21

6958

Stud Branch Tee, Male BSPP and Metric Thread

Bio-based polymer, stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
4	G1/8	6958 04 10
6	G1/8	6958 06 10
8	G1/8	6958 08 10
10	G3/8	6958 10 17
12	G3/8	6958 12 17

The body swivels for positioning purposes

6989

Stud Elbow, Male BSPP and Metric Thread

Bio-based polymer, stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
4	M5x0.8	6989 04 19
	G1/8	6989 04 10
	G1/4	6989 04 13
6	M5x0.8	6989 06 19
	G1/8	6989 06 10
	G1/4	6989 06 13
8	G1/8	6989 08 10
	G1/4	6989 08 13
	G3/8	6989 08 17
10	G1/4	6989 10 13
	G3/8	6989 10 17
	G1/2	6989 10 21
12	G3/8	6989 12 17
	G1/2	6989 12 21

The body swivels for positioning purposes

6911

Stud Fitting, Male BSPP and Metric Thread

Stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
4	M5x0.8	6911 04 19
	G1/8	6911 04 10
6	M5x0.8	6911 06 19
	G1/8	6911 06 10
8	G1/4	6911 06 13
	G1/8	6911 08 10
10	G1/4	6911 08 13
	G3/8	6911 08 17
12	G1/4	6911 10 13
	G3/8	6911 10 17
16	G1/2	6911 10 21
	G3/8	6911 12 17
16	G1/2	6911 12 21
	G3/8	6911 16 17
16	G1/2	6911 16 21
	G3/4	6911 16 27

6979

Stud Elbow, Male BSPT Thread

Bio-based polymer, stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
8	R1/4	6979 08 13
10	R1/4	6979 10 13

The body swivels for positioning purposes

6959

Stud Elbow, Male BSPP and Metric Thread

Bio-based polymer, stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
4	M5x0.8	6959 04 19
	G1/8	6959 04 10
	G1/4	6959 04 13
6	M5x0.8	6959 06 19
	G1/8	6959 06 10
	G1/4	6959 06 13
8	G1/8	6959 08 10
	G1/4	6959 08 13
	G3/8	6959 08 17
10	G1/4	6959 10 13
	G3/8	6959 10 17
	G1/2	6959 10 21
12	G3/8	6959 12 17
	G1/2	6959 12 21
	G3/8	6959 16 17
16	G1/2	6959 16 21
	G3/4	6959 16 27

The body swivels for positioning purposes

6901

Stud Fitting, Male BSPP and Metric Thread

Chemical Nickel-plated brass, EPDM



Scan for more dimensions



ØD	C	References
4	M5x0.8	6901 04 19
	G1/8	6901 04 10
6	M5x0.8	6901 06 19
	G1/8	6901 06 10
8	G1/4	6901 06 13
	G1/8	6901 08 10
10	G1/4	6901 08 13
	G3/8	6901 08 17
12	G1/4	6901 10 13
	G3/8	6901 10 17
12	G1/2	6901 10 21
	G1/2	6901 12 21

6974

Stud Fitting, Female BSPP Thread

Stainless steel 316L, EPDM



Scan for more dimensions



ØD	C	References
16	G1/2	6974 16 21
	G3/4	6974 16 27

6999

Stud Elbow, Male BSPP and Metric Thread

Bio-based polymer, chemical Nickel-plated brass, EPDM



Scan for more dimensions



ØD	C	References
6	G1/8	6999 06 10
8	G1/8	6999 08 10
	G3/8	6999 08 17
10	G1/4	6999 10 13
	G3/8	6999 10 17
12	G3/8	6999 12 17
	G1/2	6999 12 21

The body swivels for positioning purposes

6306**Equal and Unequal Union Connector**

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6306 04 00WP2
	6	6306 04 06WP2
	6	6306 06 00WP2
6	8	6306 06 08WP2
	10	6306 06 10WP2
	8	6306 08 00WP2
8	10	6306 08 10WP2
	12	6306 08 12WP2
	10	6306 10 00WP2
10	12	6306 10 12WP2
	12	6306 12 00WP2
	16	6306 16 00

Inch

ØD	ØD1	References
5/16	1/2	6306 08 62WP2
1/4	1/4	6306 56 00WP2
	3/8	6306 56 60WP2
3/8	3/8	6306 60 00WP2
1/2	1/2	6306 62 00WP2

6302**Equal and Unequal Union Elbow**

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6302 04 00WP2
	6	6302 04 06WP2
6	6	6302 06 00WP2
	8	6302 06 08WP2
8	8	6302 08 00WP2
	10	6302 08 10WP2
10	10	6302 10 00WP2
	12	6302 10 12WP2
12	12	6302 12 00WP2
16	16	6302 16 00

Inch

ØD	ØD1	References
5/16	3/8	6302 08 60WP2
1/4	1/4	6302 56 00WP2
	5/16	6302 56 08WP2
	3/8	6302 56 60WP2
	3/8	6302 60 00WP2
3/8	3/8	6302 60 00WP2
1/2	1/2	6302 62 00WP2

6304**Equal and Unequal Union Tee**

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6304 04 00WP2
6	6	6304 06 00WP2
8	8	6304 08 00WP2
10	10	6304 10 00WP2
12	12	6304 12 00WP2
16	16	6304 16 00
	12	6304 16 12

Inch

ØD	ØD1	References
5/32	5/32	6304 04 00WP2
1/4	1/4	6304 56 00WP2
5/16	5/16	6304 08 00WP2
3/8	3/8	6304 60 00WP2
	1/4	6304 60 56WP2
1/2	1/2	6304 62 00WP2
	3/8	6304 62 60WP2

6307**Equal Cross**

Bio-based polymer, EPDM



Scan for more dimensions



ØD	References
6	6307 06 00WP2
8	6307 08 00WP2

6316**Equal Bulkhead Union**

Bio-based polymer, EPDM



Scan for more dimensions



ØD	References
4	6316 04 00WP2
6	6316 06 00WP2
8	6316 08 00WP2
10	6316 10 00WP2
12	6316 12 00WP2

Inch

ØD	References
5/32	6316 04 00WP2
1/4	6316 56 00WP2
5/16	6316 08 00WP2
3/8	6316 60 00WP2

6382

Equal and Unequal Plug-In Elbow

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6382 04 00WP2
	6	6382 04 06WP2
6	6	6382 06 00WP2
	8	6382 06 08WP2
8	8	6382 08 00WP2
	10	6382 08 10WP2
10	10	6382 10 00WP2
12	12	6382 12 00WP2

Inch

ØD	ØD1	References
5/32	5/32	6382 04 00WP2
1/4	1/4	6382 56 00WP2
	3/8	6382 56 60WP2
5/16	5/16	6382 08 00WP2
	3/8	6382 08 60WP2
3/8	3/8	6382 60 00WP2

The references in diameter 4mm and 12mm are not grooved in standard version

6383

Plug-In Equal Run Tee

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6383 04 00WP2
6	6	6383 06 00WP2
8	8	6383 08 00WP2

6326

Blanking Plug

Bio-based polymer



Scan for more dimensions



ØD	References
4	6326 04 00WP2
6	6326 06 00WP2
8	6326 08 00WP2
10	6326 10 00WP2
12	6326 12 00WP2

6388

Plug-In Equal Branch Tee

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6388 04 00WP2
6	6	6388 06 00WP2
8	8	6388 08 00WP2
10	10	6388 10 00WP2

6380

Plug-In 45° Equal Elbow

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
8	8	6380 08 00WP2
10	10	6380 10 00WP2

6351

End Cap

Bio-based polymer, EPDM



Scan for more dimensions



ØD	References
4	6351 04 00WP2
6	6351 06 00WP2
8	6351 08 00WP2
10	6351 10 00WP2
12	6351 12 00WP2

Inch

ØD	References
5/32	6351 04 00WP2
5/16	6351 08 00WP2
3/8	6351 60 00WP2

6366

Plug-In Reducer

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	6	6366 04 06WP2
	8	6366 04 08WP2
6	8	6366 06 08WP2
	10	6366 06 10WP2
8	10	6366 08 10WP2
	12	6366 08 12WP2
10	12	6366 10 12WP2

Inch

ØD	ØD1	References
1/4	5/16	6366 56 08WP2
	3/8	6366 56 60WP2
5/16	3/8	6366 08 60WP2

6322

Plug-In Barb Connector

Bio-based polymer



Scan for more dimensions



ØD	ØD1	References
6	4	6322 06 04WP2
8	5.75	6322 08 06WP2
10	7	6322 10 07WP2

Inch

ØD	ØD1	References
1/4	1/4	6322 56 56WP2
3/8	1/4	6322 60 56WP2
	3/8	6322 60 60WP2



For customers seeking alternatives to plastic fittings in harsh environments, **the LF 3600 offers easy assembly, a compact design, and numerous configurations.** It is ideal for demanding sectors such as automotive and food processing, guaranteeing optimum robustness and complete confidence in the performance of the installation.

Technical specifications



Fluids: compressed air, neutral gases, industrial water with or without glycol



Operating pressure: 10⁻² millibar to 30 bar
(20 bar: 3699, 3609, 3639)



Operating temperature: -25°C to +150°C




Diameter: 4 to 14 mm



Regulations: RoHS, REACH, PED, FDA

Performance depends on the fluids, materials and tube used.

Component materials

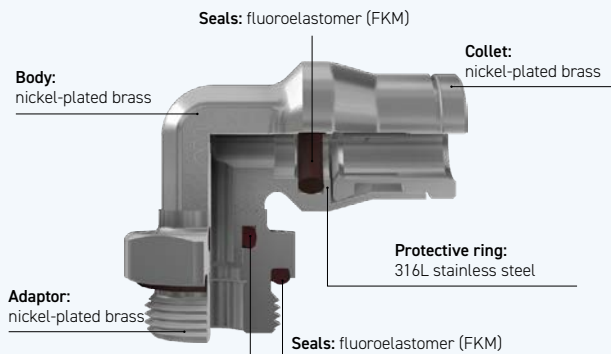

Benefits

- **Full metal design in nickel-plated brass** to withstand mechanical shocks and sparks.
- **Collet fastening system** that ensures high pressure resistance.
- **High-performance FKM seal** ideal for high temperatures.
- **Surface treatment reinforced by high phosphorus chemical nickel plating**, offering resistance suited to the stringent requirements of the food processing industry.

Recommended applications



Installation guide

Maximum tightening torque (daN.m)	Threads							
	M5x0.8	M6x1	M8x1	M10x1	G1/8	G1/4	G3/8	G1/2
	0.16	0.18	0.6	0.8	0.8	1.2	3	3.5

3675

Stud Fitting, Male BSPT Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3675 04 10
	R1/4	3675 04 13
6	R1/8	3675 06 10
	R1/4	3675 06 13
8	R1/8	3675 08 10
	R1/4	3675 08 13
10	R3/8	3675 10 17
	R1/2	3675 10 21
12	R1/4	3675 12 13
	R3/8	3675 12 17
14	R1/2	3675 14 21
	R3/8	3675 14 17

3601

Stud Fitting, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3601 04 19
	M6x1	3601 04 52
	M8x1	3601 04 56
	G1/8	3601 04 10
6	G1/4	3601 04 13
	M5x0.8	3601 06 19
	M10x1	3601 06 60
	G1/8	3601 06 10
8	G1/4	3601 06 13
	G1/8	3601 08 10
	G1/4	3601 08 13
	G3/8	3601 08 17
10	G1/4	3601 10 13
	G3/8	3601 10 17
	G1/2	3601 10 21
	G1/4	3601 12 13
12	G3/8	3601 12 17
	G1/2	3601 12 21
	G3/8	3601 14 17
	G1/2	3601 14 21

3681

Stud Fitting with Internal Hexagon, Male Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3681 04 19

3614

Stud Fitting, Female BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3614 04 19
	G1/8	3614 04 10
	G1/4	3614 04 13
6	G1/8	3614 06 10
	G1/4	3614 06 13
8	G1/8	3614 08 10
	G1/4	3614 08 13
10	G3/8	3614 10 17
	G3/8	3614 12 17
12	G1/2	3614 12 21

3609

Stud Elbow, Male BSPT Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3609 04 10
	R1/4	3609 04 13
6	R1/8	3609 06 10
	R1/4	3609 06 13
8	R1/8	3609 08 10
	R1/4	3609 08 13
10	R3/8	3609 10 17
	R1/2	3609 10 21
12	R1/4	3609 12 13
	R3/8	3609 12 17
14	R1/2	3609 14 21
	R3/8	3609 14 17

The body swivels for positioning purposes. Maximum pressure: 20 bar

3699

Compact Elbow, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3699 04 19
	M6x1	3699 04 52
	M8x1	3699 04 56
	G1/8	3699 04 10
6	G1/4	3699 04 13
	M10x1	3699 06 60
	G1/8	3699 06 10
	G1/4	3699 06 13
8	G1/8	3699 08 10
	G1/4	3699 08 13
	G3/8	3699 08 17
	G1/4	3699 10 13
10	G3/8	3699 10 17
	G1/4	3699 12 13
	G3/8	3699 12 17
	G1/2	3699 12 21
14	G3/8	3699 14 17
	G1/2	3699 14 21

The body swivels for positioning purposes. Maximum pressure: 20 bar

3618

Single Banjo, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3618 04 19
	G1/8	3618 04 10
6	M5x0.8	3618 06 19
	G1/8	3618 06 10
8	G1/4	3618 06 13
	G1/8	3618 08 10
10	G1/4	3618 08 13
	G3/8	3618 10 17

Maximum temperature: +80°C

3629**Extended Stud Elbow, Male BSPT Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3629 04 10
6	R1/8	3629 06 10
	R1/4	3629 06 13
8	R1/8	3629 08 10
	R1/4	3629 08 13
10	R1/4	3629 10 13

The body swivels for positioning purposes

3669**Extended Stud Elbow, Male BSPP and Metric Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3669 04 19
	G1/8	3669 04 10
6	G1/8	3669 06 10
	G1/4	3669 06 13
8	G1/8	3669 08 10
	G1/4	3669 08 13
10	G1/4	3669 10 13
	G3/8	3669 10 17
12	G1/4	3669 12 13
	G3/8	3669 12 17
14	G1/2	3669 14 21

The body swivels for positioning purposes

3603**Stud Run Tee, Male BSPT Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3603 04 10
6	R1/8	3603 06 10
	R1/4	3603 06 13
8	R1/8	3603 08 10
	R1/4	3603 08 13
10	R1/4	3603 10 13
12	R3/8	3603 12 17
14	R1/2	3603 14 21

The body swivels for positioning purposes

3693**Stud Run Tee, Male BSPP and Metric Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3693 04 19
	G1/8	3693 04 10
6	G1/8	3693 06 10
	G1/4	3693 06 13
8	G1/8	3693 08 10
	G1/4	3693 08 13
10	G1/4	3693 10 13
12	G3/8	3693 12 17
14	G1/2	3693 14 21

The body swivels for positioning purposes

3608**Stud Branch Tee, Male BSPT Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3608 04 10
6	R1/8	3608 06 10
	R1/4	3608 06 13
8	R1/8	3608 08 10
	R1/4	3608 08 13
10	R1/4	3608 10 13
	R3/8	3608 10 17
12	R3/8	3608 12 17
14	R1/2	3608 14 21

The body swivels for positioning purposes

3698**Stud Branch Tee, Male BSPP and Metric Thread**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3698 04 19
	G1/8	3698 04 10
6	G1/8	3698 06 10
	G1/4	3698 06 13
8	G1/8	3698 08 10
	G1/4	3698 08 13
10	G1/4	3698 10 13
12	G3/8	3698 12 17
14	G1/2	3698 14 21

The body swivels for positioning purposes

3602**Equal Elbow**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	References
4	3602 04 00
6	3602 06 00
8	3602 08 00
10	3602 10 00
12	3602 12 00
14	3602 14 00

3604**Equal Tee**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	References
4	3604 04 00
6	3604 06 00
8	3604 08 00
10	3604 10 00
12	3604 12 00
14	3604 14 00

3606**Equal Tube-to-Tube Connector**

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	References
4	3606 04 00
6	3606 06 00
8	3606 08 00
10	3606 10 00
12	3606 12 00
14	3606 14 00

3636

Bulkhead Connector, Female BSPP Thread

Chemical Nickel-plated brass, FKM



ØD	C	References
4	G1/8	3636 04 10
6	G1/8	3636 06 10
	G1/4	3636 06 13
8	G1/8	3636 08 10
	G1/4	3636 08 13
10	G3/8	3636 10 17
12	G1/2	3636 12 21

3621

Stud Standpipe, Male BSPT Thread

Chemical Nickel-plated brass, FKM



ØD	C	References
6	R1/4	3621 06 13
8	R1/4	3621 08 13
10	R1/4	3621 10 13
12	R1/2	3621 12 21

3668

Plug-In Increaser

Chemical Nickel-plated brass, FKM



ØD1	ØD2	References
6	4	3668 06 04

3667

Plug-In Metric/Inch Adaptor

Chemical Nickel-plated brass, FKM



ØD1	ØD2	References
6	1/4	3667 06 56
10	3/8	3667 10 60

3639

Equal Bulkhead Elbow

Chemical Nickel-plated brass, FKM



ØD	References
4	3639 04 00
6	3639 06 00
8	3639 08 00
10	3639 10 00
12	3639 12 00
14	3639 14 00

The body swivels for positioning purposes. Maximum pressure: 20 bar

3631

Stud Standpipe, Male BSPP and Metric Thread

Chemical Nickel-plated brass, FKM



ØD	C	References
4	M5x0.8	3631 04 19
	G1/8	3631 04 10
	G1/4	3631 04 13
6	G1/8	3631 06 10
	G1/4	3631 06 13
	G1/8	3631 08 10
8	G1/4	3631 08 13
	G3/8	3631 08 17
10	G1/4	3631 10 13
	G3/8	3631 10 17
12	G3/8	3631 12 17
	G1/2	3631 12 21
14	G1/2	3631 14 21

3622

Plug-In Barb Connector

Chemical Nickel-plated brass, FKM



ØD1	ØD2	ØD3	References
4	3.2	5	3622 04 53
	5	7	3622 04 05
6	5	7	3622 06 05
	6.3	8.3	3622 08 56
8	8	10	3622 08 08
	6.3	8.3	3622 10 56
10	8	10	3622 10 08
	8	10	3622 12 08
12	10	12	3622 12 10
	12.5	14.5	3622 12 62
14	12.5	14.5	3622 14 62
	14	16	3622 14 14

ØD2 : Ø Internal tube

3616

Equal Bulkhead Connector

Chemical Nickel-plated brass, FKM



ØD	References
4	3616 04 00
6	3616 06 00
8	3616 08 00
10	3616 10 00
12	3616 12 00
14	3616 14 00

3666

Plug-In Reducer

Chemical Nickel-plated brass, FKM



ØD1	ØD2	References
4	6	3666 04 06
	8	3666 04 08
6	8	3666 06 08
	10	3666 06 10
8	10	3666 08 10
	12	3666 08 12
10	12	3666 10 12
12	14	3666 12 14

3626

Blanking Plug

Chemical Nickel-plated brass, FKM



ØD	References
4	3626 04 00
6	3626 06 00
8	3626 08 00
10	3626 10 00
12	3626 12 00
14	3626 14 00

3620

Male Stem Connector

Chemical Nickel-plated brass, FKM



ØD	References
4	3620 04 00
6	3620 06 00
8	3620 08 00
10	3620 10 00
12	3620 12 00
14	3620 14 00




Made entirely of stainless steel and ergonomically designed, this fitting is ideal for corrosive environments such as food processing, chemical and medical applications.

Technical specifications

-  **Fluids:** compressed air, neutral gases, industrial water with or without glycol
-  **Operating pressure:** 10^{-2} millibar to 30 bar (20 bar: 3889, 3879)
-  **Operating temperature:** -25°C to +150°C
-  **Diameter:** 4 to 12 mm – 3/16" to 1/2"
-  **Regulations:** RoHS, REACH, ISO 14743, PED, FDA, CE N° 1935/2004

Performance depends on the fluids, materials and tube used.

Component materials

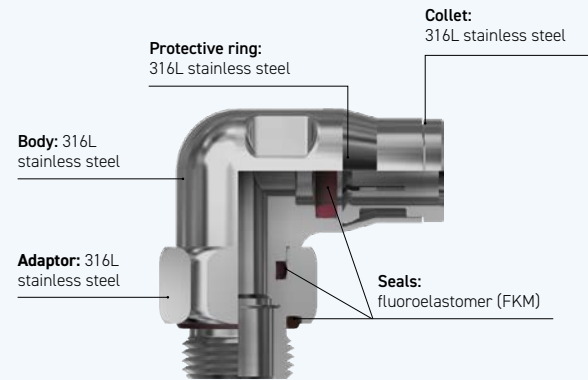

Benefits

- **Full metallic design, made of 316L stainless steel**, able to withstand aggressive environments while preserving fluid integrity.
- **Unique hygienic external design**, with a smooth surface (Ra 0.8) and no retention areas, simplifying the cleaning process and preventing contamination.
- **Collet technology** ensuring high pressure resistance.
- **High-performance FKM seal**, ideal for a wide range of temperatures.

Recommended applications




Installation guide

Maximum tightening torque (daN.m)	Threads				
	M5x0.8	G1/8	G1/4	G3/8	G1/2
	0.16	0.8	1.2	3	3.5

Tightening torque for bulkhead fittings	Ø (mm)	4	6	8	10	12
	daN.m min. max.	0.5 0.9	0.5 0.9	0.6 1	0.6 1	0.6 1

The stud standpipe 3821 and 3831 can be used as illustrated, allowing:

- stock optimization
- installation of tees and elbows where required.



3805

Stud Fitting, Male BSPT Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3805 04 10
	R1/4	3805 04 13
6	R1/8	3805 06 10
	R1/4	3805 06 13
8	R1/8	3805 08 10
	R1/4	3805 08 13
	R3/8	3805 08 17
10	R1/4	3805 10 13
	R3/8	3805 10 17
	R1/2	3805 10 21
12	R3/8	3805 12 17
	R1/2	3805 12 21

3801

Stud Fitting, Male BSPP and Metric Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3801 04 19
	G1/8	3801 04 10
6	M5x0.8	3801 06 19
	G1/8	3801 06 10
	G1/4	3801 06 13
8	G1/8	3801 08 10
	G1/4	3801 08 13
	G3/8	3801 08 17
10	G1/4	3801 10 13
	G3/8	3801 10 17
	G1/2	3801 10 21
12	G1/2	3801 12 13
	G3/4	3801 12 17

3805

Stud Fitting, Male NPT Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	NPT1/8	3805 04 11
	NPT1/4	3805 04 13
6	NPT1/8	3805 06 11
	NPT1/4	3805 06 14
8	NPT1/8	3805 08 11
	NPT1/4	3805 08 14
10	NPT1/4	3805 10 14
	NPT3/8	3805 10 18
	NPT1/2	3805 10 22
12	NPT3/8	3805 12 18
	NPT1/2	3805 12 22

Inch

ØD	C	References
5/32	NPT1/8	3805 04 11
3/16	NPT1/8	3805 55 11
1/4	NPT1/8	3805 56 11
	NPT1/4	3805 56 14
5/16	NPT1/8	3805 08 11
	NPT1/4	3805 08 14
3/8	NPT1/4	3805 60 14
	NPT3/8	3805 60 18
	NPT1/2	3805 62 14
1/2	NPT3/8	3805 62 18
	NPT1/2	3805 62 22

3809

Stud Elbow, Male BSPT Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3809 04 10
	R1/4	3809 04 13
6	R1/8	3809 06 10
	R1/4	3809 06 13
8	R1/8	3809 08 10
	R1/4	3809 08 13
10	R1/4	3809 10 13
	R3/8	3809 10 17

The body swivels for positioning purposes

3899

Stud Elbow, Male BSPP and Metric Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	M5x0.8	3899 04 19
	G1/8	3899 04 10
	G1/4	3899 04 13
6	M5x0.8	3899 06 19
	G1/8	3899 06 10
	G1/4	3899 06 13
8	G1/8	3899 08 10
	G1/4	3899 08 13
	G3/8	3899 08 17
10	G1/4	3899 10 13
	G3/8	3899 10 17
	G1/2	3899 10 21

The body swivels for positioning purposes

3809

Stud Elbow, Male NPT Thread

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
6	NPT1/8	3809 06 11
	NPT1/4	3809 06 14
8	NPT1/8	3809 08 11
	NPT1/4	3809 08 14
10	NPT1/4	3809 10 14

The body swivels for positioning purposes

3889**Compact Elbow, BSPT male Thread**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	R1/8	3889 04 10
	R1/4	3889 04 13
6	R1/8	3889 06 10
	R1/4	3889 06 13
8	R1/8	3889 08 10
	R1/4	3889 08 13
10	R1/4	3889 10 13
	R3/8	3889 10 17
	R1/4	3889 12 13
12	R3/8	3889 12 17
	R1/2	3889 12 21

The body swivels for positioning purposes Max. 20 bar

3879**Compact Stud Elbow, Male BSPP Thread**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	G1/8	3879 04 10
	G1/4	3879 04 13
6	G1/8	3879 06 10
	G1/4	3879 06 13
8	G1/8	3879 08 10
	G1/4	3879 08 13
10	G3/8	3879 08 17
	G1/4	3879 10 13
	G3/8	3879 10 17
12	G1/4	3879 12 13
	G3/8	3879 12 17
	G1/2	3879 12 21

The body swivels for positioning purposes Max. 20 bar

3889**Compact Stud Elbow, Male NPT Thread**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
4	NPT1/8	3889 04 11
6	NPT1/8	3889 06 11
	NPT1/4	3889 06 14
8	NPT1/8	3889 08 11
	NPT1/4	3889 08 14
10	NPT1/4	3889 10 14
	NPT3/8	3889 10 18
12	NPT1/4	3889 12 14
	NPT3/8	3889 12 18
	NPT1/2	3889 12 22

Inch

ØD	C	References
5/32	NPT1/8	3889 04 11
1/4	NPT1/8	3889 56 11
	NPT1/4	3889 56 14
5/16	NPT1/8	3889 08 11
	NPT1/4	3889 08 14
3/8	NPT1/4	3889 60 14
	NPT3/8	3889 60 18
1/2	NPT3/8	3889 62 18
	NPT1/2	3889 62 22

The body swivels for positioning purposes Max. 20 bar.

3893**Stud Run Tee, Male BSPP and Metric Thread**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	C	References
8	G3/8	3893 08 17

The body swivels for positioning purposes

3802**Equal Elbow**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	References
4	3802 04 00
6	3802 06 00
8	3802 08 00
10	3802 10 00
12	3802 12 00

Inch

ØD	References
5/32	3802 04 00
1/4	3802 56 00
5/16	3802 08 00
3/8	3802 60 00
1/2	3802 62 00

3804**Equal Tee**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	References
4	3804 04 00
6	3804 06 00
8	3804 08 00
10	3804 10 00
12	3804 12 00

Inch

ØD	References
5/32	3804 04 00
1/4	3804 56 00
5/16	3804 08 00
3/8	3804 60 00
1/2	3804 62 00

3806**Equal Union Connector**

Stainless steel 316L, FKM



Scan for more dimensions



ØD	References
4	3806 04 00
6	3806 06 00
8	3806 08 00
10	3806 10 00
12	3806 12 00

Inch

ØD	References
5/32	3806 04 00
3/16	3806 55 00
1/4	3806 56 00
5/16	3806 08 00
3/8	3806 60 00
1/2	3806 62 00

3821

Stud Standpipe, Male BSPT Thread

Stainless steel 316L



ØD	C	References
4	R1/8	3821 04 10
6	R1/8	3821 06 10
	R1/4	3821 06 13
8	R1/8	3821 08 10
	R1/4	3821 08 13
10	R1/4	3821 10 13
	R3/8	3821 10 17
	R1/4	3821 12 13
12	R3/8	3821 12 17
	R1/2	3821 12 21

3831

Stud Standpipe, Male BSPP and Metric Thread

Stainless steel 316L



ØD	C	References
4	M5x0.8	3831 04 19
	G1/8	3831 04 10
6	G1/8	3831 06 10
	G1/4	3831 06 13
8	G1/8	3831 08 10
	G1/4	3831 08 13
10	G1/4	3831 10 13
	G3/8	3831 10 17
12	G1/4	3831 12 13
	G1/2	3831 12 21

3821

Stud Standpipe, Male NPT Thread

Stainless steel 316L



ØD	C	References
6	NPT1/4	3821 06 14
8	NPT1/4	3821 08 14

3866

Push-In Reducer

Stainless steel 316L, FKM



ØD1	ØD2	References
4	6	3866 04 06
4	8	3866 04 08
6	8	3866 06 08
6	10	3866 06 10
8	10	3866 08 10
8	12	3866 08 12
10	12	3866 10 12

3816

Equal Bulkhead Connector

Stainless steel 316L, FKM



ØD	References
4	3816 04 00
6	3816 06 00
8	3816 08 00
10	3816 10 00
12	3816 12 00

Inch

ØD	References
5/32	3816 04 00
1/4	3816 56 00
5/16	3816 08 00
3/8	3816 60 00

IP55 waterproof rating

3826

Blanking Plug

Stainless steel 316L



ØD1	ØD2	References
4	6	3826 04 00
6	8	3826 06 00
8	10	3826 08 00
10	12	3826 10 00
12	14	3826 12 00



Related products

3800

Pre-Grooving Tool for Metallic Tubing

Treated steel



Scan for more dimensions



References

3800 70 00

This device is designed to correctly groove stainless-steel tubes with an outside diameter from 4 mm to 12 mm inclusive, and from 3/16" to 1/2" inclusive, thereby ensuring a perfect instant tube-to-fitting connection with LF 3800 stainless-steel fittings.



Specially designed for lubrication applications, these fittings provide secure connections and optimal sealing, meeting the stringent requirements of industrial machinery.

Technical specifications



Fluids: oils and lubricants (see oil compatibility or consult us)



Operating pressure: 10⁻² millibar to 60 bar



Operating temperature: -40°C to +60°C




Diameter: 4 to 10 mm



Regulations: RoHS, REACH

Performance depends on the fluids, materials and tube used.

Component materials

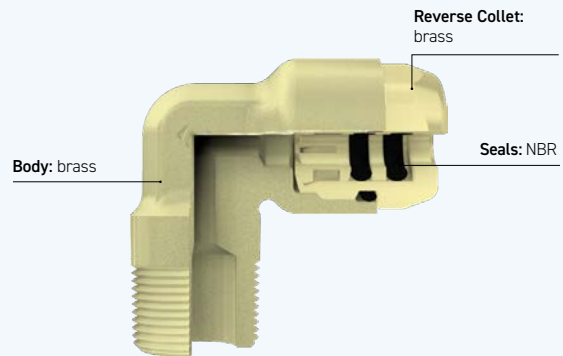

Benefits

- **High performance and durability:** brass die-cast parts are robust and offer excellent resistance to high pressure and temperature fluctuations, capable of withstanding pressures of up to 60 bar.
- **Secure and efficient connection:** these fittings incorporate three sealing elements to provide reliable sealing while allowing manual connection. Their reverse-collet design also prevents accidental disconnection without the use of tools.

Installation guide

Maximum and minimum tightening torque (daN.m)	Threads	M6x1	M8x1	M8x1.25	M10x1	M12x1	M14x1.5	R 1/8	R 1/4
	Conical	0.2/0.6	0.2/1.2	0.2/1	0.2/1.2	0.2/2	0.5/1.5	0.2/1.0	0.5/1.5
	Parallel	-	0.6/1	-	0.6/1	1.8/2.2	-	-	-

Recommended applications



6105

Stud Fitting, Male BSPT and Taper Metric Thread

Brass, NBR



Scan for more dimensions



ØD	C	References
4	M6x1	6105 04 52
	M8x1	6105 04 56
	M8x1.25	6105 04 57
	M10x1	6105 04 60
	R1/8	6105 04 10
	R1/4	6105 04 13
6	M10x1	6105 06 60
	R1/8	6105 06 10
	R1/4	6105 06 13
8	M12x1	6105 08 65

6101

Stud Fitting, Male Parallel and Metric Thread

Brass, NBR



Scan for more dimensions



ØD	C	References
4	M10x1	6101 04 60
6	M10x1	6101 06 60

6114

Stud Fitting, Female Metric Parallel Thread

Brass, NBR



Scan for more dimensions



ØD	C	References
4	M8x1	6114 04 56
6	M8x1	6114 06 56

6104

Equal Tee

Brass, NBR



Scan for more dimensions



ØD	References
4	6104 04 00
6	6104 06 00

6179

Stud Elbow, Male BSPT and Taper Metric Thread

Brass, NBR



Scan for more dimensions



ØD	C	References
4	M6x1	6179 04 52
	M8x1	6179 04 56
	M8x1.25	6179 04 57
	M10x1	6179 04 60
	R1/8	6179 04 10
	R1/4	6179 04 13
6	M10x1	6179 06 60
	R1/8	6179 06 10
	R1/4	6179 06 13

6106

Tube-to-Tube Connector

Brass, NBR



Scan for more dimensions



ØD	References
4	6106 04 00
6	6106 06 00
8	6106 08 00



Related products

0138

Copper Washer

Copper



Scan for more dimensions



References

0138

DIN 7603
ISO 65061



Proven fittings with enhanced cleanliness, designed for transporting liquids and gases in anaesthesia machines and respiratory equipment.

Technical specifications



Fluids: Oxygen (100%), Carbon dioxide, Nitrous oxide, Xenon, Anaesthetic gases



Operating pressure: 10⁻² millibar to 15 bar



Operating temperature: -10°C to +95°C




Diameter: 4 to 12 mm



Regulations: RoHS, REACH, FDA, CE N° 1935/2004 (excluding 6801, 6819 and 6899)

Performance depends on the fluids, materials and tube used.

Component materials

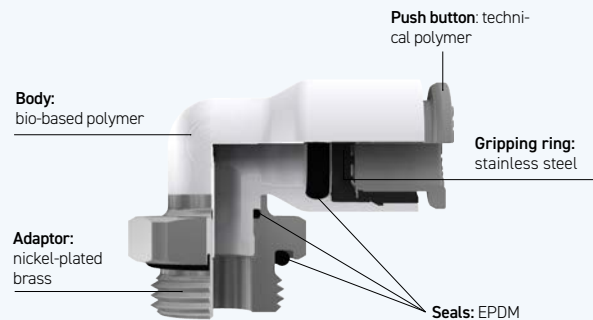

Benefits

- **Enhanced cleanliness:** manufactured in accordance with ASTM G93 standards, ensuring exceptional cleanliness for critical applications.
- **Safe and environmentally friendly:** made from bio-based polymer, free from Pthalates and bisphenol, ensuring users safety and environmental responsibility.
- **Ready to use:** hermetically sealed to prevent contamination during transport and storage until use.
- **Optimal design:** features a compact design with no flow rate reduction and a push-In connection technology that simplifies installation and improves operational efficiency.


Installation guide

Maximum tightening torque (daN.m)	Threads				
	M5x0.8	G1/8	G1/4	G3/8	G1/2
	1.16	0.8	1.2	3	3.5

Recommended applications



Ideal product for breathing apparatus

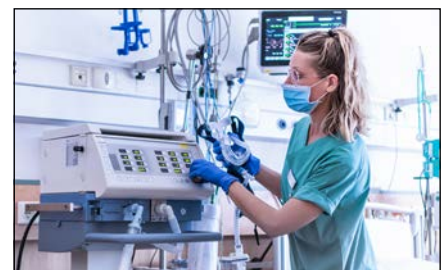

Cleanliness for respirators in medical intensive care units

6801

Stud Fitting, Male BSPP and Metric Thread

Chemical nickel-plated brass, EPDM



Scan for more dimensions



ØD	C	References
4	M5x0.8	6801 04 19
	G1/8	6801 04 10
	M5x0.8	6801 06 19
6	G1/8	6801 06 10
	G1/4	6801 06 13
	G1/8	6801 08 10
8	G1/4	6801 08 13
	G1/4	6801 10 13
10	G3/8	6801 10 17
	G3/8	6801 12 17
12	G1/2	6801 12 21

6806

Equal Union Connector

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6806 04 00
6	6	6806 06 00
8	8	6806 08 00
10	10	6806 10 00
12	12	6806 12 00

6840

Equal Single Y Piece

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6840 04 00
6	6	6840 06 00
8	8	6840 08 00
10	10	6840 10 00
12	12	6840 12 00

6804

Equal Tee

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6804 04 00
6	6	6804 06 00
8	8	6804 08 00
10	10	6804 10 00
12	12	6804 12 00

6899

Stud Elbow, Male BSPP and Metric Thread

Bio-based polymer, chemical nickel-plated brass, EPDM



Scan for more dimensions



ØD	C	References
4	G1/8	6899 04 10
	G1/4	6899 04 13
	M5x0.8	6899 06 19
6	G1/8	6899 06 10
	G1/4	6899 06 13
	G1/4	6899 08 13

The body swivels for positioning purposes

6819

Stud Elbow, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions

ØD	C	References
4	M5x0.8	6819 04 19
	G1/8	6819 04 10
	G1/4	6819 04 13
6	M5x0.8	6819 06 19
	G1/8	6819 06 10
	G1/4	6819 06 13
8	G1/8	6819 08 10
	G1/4	6819 08 13
10	G1/4	6819 10 13

The body swivels for positioning purposes

6866

Plug-In Reducer

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	6	6866 04 06
6	8	6866 06 08
	10	6866 06 10
8	10	6866 08 10
	12	6866 08 12

6826

Blanking Plug

Bio-based polymer



Scan for more dimensions



ØD	References
4	6826 04 00
6	6826 06 00
8	6826 08 00
10	6826 10 00
12	6826 12 00

6882

Equal and Unequal Plug-In Elbow

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6882 04 00
	6	6882 04 06
6	6	6882 06 00
	8	6882 06 08
8	8	6882 08 00

The 4 mm diameter version is not grooved as standard.

6883

Plug-In Equal Run Tee

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6883 04 00
6	6	6883 06 00
8	8	6883 08 00

6802

Equal Elbow

Bio-based polymer, EPDM



Scan for more dimensions



ØD	ØD1	References
4	4	6802 04 00
6	6	6802 06 00
8	8	6802 08 00
10	10	6802 10 00
12	12	6802 12 00



Legris cartridges are the ideal solution for quick, efficient and safe installation. Designed as a single piece, they optimise productivity and space by fitting into non-threaded and non-grooved cavities.

To optimise the design of your solution, we recommend that you contact our application engineers.


CARSTICK® POLYMER CARTRIDGES

Technical specifications

	LF 3100		LF6300	
Seal materials:	NBR		EPDM	
 Fluids:	Compressed air, neutral gases		Industrial water, treated water with or without glycol	
 Operating pressure:	10 ⁻² millibar to 20 bar		1 to 16 bar	
 Operating temperature:	-20°C to +80°C		-10°C to +95°C	
 Diameter:	4 to 14 mm - 1/8" to 3/8"		4 to 12 mm - 5/32" to 1/2"	
 Regulations:	RoHS, REACH, ISO 14743, PED		RoHS, REACH, FDA, CE N° 1935/2004	

Performance depends on the fluids, materials and tube used.

Component materials

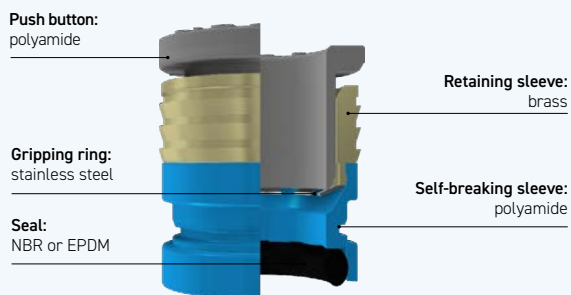

Recommended applications



Benefits

- **Productivity gains:** our single-component design allows for 55% to 75% faster insertion than traditional cartridge solutions.
- **Space saving:** this cartridge is the most compact option available on the market.
- **Fluid integrity:** the conveyed fluid only comes into contact with the seal, thus ensuring its integrity.
- **Ready-to-use packaging:** stick packaging ensures optimal protection of cartridges during transport and storage, while enabling automated distribution in industrial processes.

Installation guide



See our installation manual.

[Download it here](#)



CARSTICK+ REMOVABLE POLYMER CARTRIDGE VERSION

Technical specifications



Fluid: industrial water, treated water with or without glycol



Operating pressure: 1 to 16 bar



Operating temperature: -10 °C to +95 °C



Diameter: 4 and 6 mm



Regulations: RoHS, REACh, FDA, CE N° 1935/2004

Performance depends on the fluids, materials and tube used.



Component materials

Push button:
polyamide


External gripping ring:
stainless steel

Inner gripping ring:
stainless steel

Seals:
EPDM or FKM

Retaining sleeve:
polyamide

Self-breaking sleeve:
polyamide



Benefits

Removable polymer cartridges offer all the advantages of cartridges, plus the following features:

- **Reusable cavity:** the cartridge can be removed without damaging the cavity.
- **Can be inserted into many materials** (brass, aluminium, polymers including non-elastic ones, e.g. PEEK, POM, etc.)
- **Low insertion force:** insertion force < 20 daN.

Installation guide



See our installation manual.

[Download it here](#)



METAL CARTRIDGE VERSION

Technical specifications



Fluids: compressed air, industrial water



Operating pressure: 10⁻² millibar to 30 bar



Operating temperature: -25 °C to +150 °C



Diameter: 4 to 14 mm



Regulations: RoHS, REACh, PED

Performance depends on the fluids, materials and tube used.



Component materials

Body, collet and protective ring: nickel-plated brass (LF 3600) and stainless steel (LF 3800)

Seals: FKM



Benefits

- **2 body materials available:** LF 3600 nickel-plated brass for aggressive environments and LF 3800 stainless steel for corrosive environments.
- **Full metallic products** to offer the highest mechanical and chemical resistance.
- **Resistant to high temperatures** (+150°C).
- **Can be installed in polymer or metal cavities** (cavities drawing available). Please do not hesitate to contact us.

Polymer cartridges Carstick®

3100

Carstick® Cartridge

Polymer, Brass, NBR



Scan for more dimensions



ØD	References
4	3100 04 00
6	3100 06 00
8	3100 08 00
10	3100 10 00
12	3100 12 00
14	3100 14 00

Inch

ØD	References
1/8	3100 53 00
5/32	3100 04 00
1/4	3100 56 00
5/16	3100 08 00
3/8	3100 60 00

6300

LIQUIfit® Cartridge

Polymer, Brass, EPDM



Scan for more dimensions



ØD	References
4	6300 04 00
6	6300 06 00
8	6300 08 00
10	6300 10 00
12	6300 12 00

Inch

ØD	References
5/32	6300 04 00
1/4	6300 56 00
5/16	6300 08 00
3/8	6300 60 00
1/2	6300 62 00

Removable polymer cartridges CARSTICK+

6300..24

Removable LF6300 cartridge

Polymer, Stainless steel, EPDM



Scan for more dimensions



ØD	References
4	6300 04 01 24
6	6300 06 01 24

6300..26

Removable LF6300 cartridge

Polymer, Stainless steel, EPDM



Scan for more dimensions



ØD	References
4	6300 04 01 26
6	6300 06 01 26

Metal cartridges

3600

LF3600 one-piece cartridge

Chemical Nickel-plated brass, FKM



Scan for more dimensions



ØD	References
4	3600 04 00
6	3600 06 00
8	3600 08 00
10	3600 10 00

3800

LF3800 one-piece cartridge


Stainless steel 316L, FKM



Scan for more dimensions



ØD	References
4	3800 04 00
6	3800 06 00
8	3800 08 00
10	3800 10 00

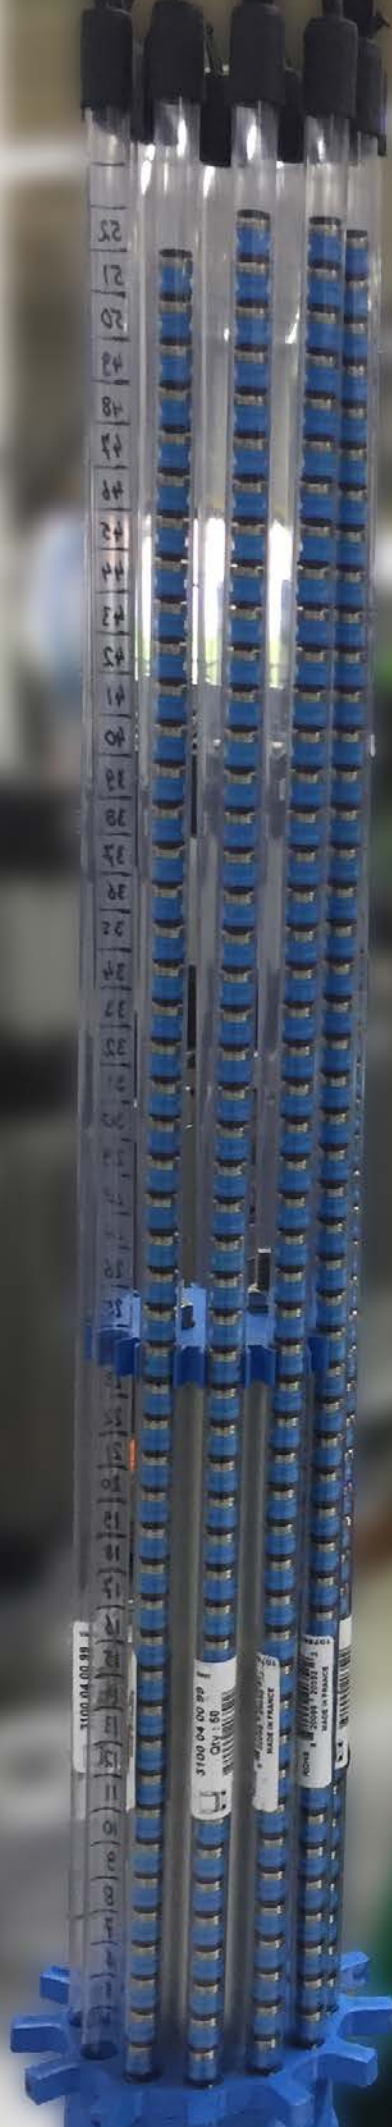

Tube packaging for maximum protection

02

PNEUMATIC EXCELLENCE

Legris function fittings have been the benchmark in the industrial market for over 60 years. They offer comprehensive solutions to protect and optimise pneumatic processes.

SUSTAINABILITY AND PERFORMANCE

The quality of Legris function fittings guarantees a long service life in pneumatic installations while offering precise adjustment for quick and reliable implementation.

A VARIED SELECTION

The wide range, proven over many years, provides a solution suitable for all pneumatic applications.







LEGRIS FUNCTION FITTINGS

PRODUCTS OFFER




Function fittings are intended for **pneumatic applications involving compressed air**.



LEGRIS FUNCTION FITTINGS	Materials (body/seal)	Maximum operating pressure (bar)	Temperature		PAGE
			Min.	Max.	
Blocking fittings 	Nickel-plated brass/NBR ✓	10	-20°C	+80°C	52
Soft start fittings 	Nickel-plated brass/NBR technical polymer	10	-15°C	+60°C	54
Non-return valves 	Technical polymer/NBR ✓	10	0°C	+70°C	56
	Stainless steel/FKM	40	-20°C	+180°C	
Adjustable non-return valves 	Chemically nickel-plated brass/NBR	12	-20°C	+80°C	60
Piloted non-return valves 	Nickel-plated brass/NBR technical polymer	10	-5°C	+60°C	62
Flow control regulators 	Technical polymer/NBR	10	0°C	+70°C	64
	Treated aluminium, nickel-plated brass/NBR	10	-25°C	+70°C	
	316L stainless steel/FKM	40	-15°C	+120°C	
Quick-release valves 	Nickel-plated brass or aluminium or stainless steel/Polyurethane or FKM	10	-20°C	+120°C	82
Pressure regulator fittings 	Nickel-plated brass/NBR technical polymer	16	-10°C	+70°C	84
Pressure reducer fittings 	Brass	15	-10°C	+80°C	86
Snap fittings 	Nickel-plated brass/NBR technical polymer	10	-20°C	+80°C	88
Manually operated fittings and valves 	Nickel-plated brass, aluminium/NBR	16	-5°C	+70°C	90
Sensor fittings with detection 	Technical polymer, treated brass/NBR	8	-15°C	+60°C	92
Silencers 	Polymer, sintered bronze, nickel-plated brass, 316L stainless steel	12	-20°C	+180°C	94

HOW TO CHOOSE YOUR FUNCTION FITTING

What functions do you require for your pneumatic system?

OBJECTIVES	WHAT WOULD YOU LIKE TO DO?	LEGRIS FUNCTION FITTINGS	SYMBOLS
PROTECT YOUR INSTALLATION	Ensure that the load is maintained during an emergency stop	Blocking fittings	 
	Allow pressure to build up gradually when restarting the installation, thereby protecting it from shocks.	Soft start fittings	
	Convey compressed air in one direction only, blocking its return in the event of a cut-off	Non-return valves	 
	Performs the same function as a non-return valve while allowing the opening pressure to be adjusted.	Adjustable non-return valves	
	Three functions in one product: block, regulate and purge compressed air	Piloted non-return valves	
IMPROVE YOUR INSTALLATION	Regulate air flow, thanks to an adjustable pass diameter, to control the speed of a cylinder rod.	Flow control regulators	  
	Allow exhaust air to pass unrestricted into the atmosphere in order to accelerate the rod of a cylinder.	Quick-release valves	
	Regulate pressure in applications requiring control of cylinder force	Pressure regulator fittings	
	Reduce the pressure consumed in part of the machine in order to save energy	Pressure reducer fittings	
	Partially isolate a circuit without draining the entire system	Snap fittings	
	Purge a pneumatic circuit	Manually operated couplers and fittings	  
	Issue a pneumatic or electrical signal as soon as the pressure falls below its control threshold.	Sensor fittings with detection	 
	Reducing the noise level of the pneumatic network	Silencers	

Do you have any compliance requirements?




- All our products comply with RoHS and REACH standards.
- Legris function fittings used on the safety control line, known as "Safety" fittings, comply with Machinery Directive 2006/42/EC and ISO 13849-1 and are identified by the following logo: 
- All our processes comply with ISO 9001 and ISO 14001 standards.

For a complete list of our certificates, [please click here.](#)



HOW TO CHOOSE YOUR FUNCTION FITTING

How should you install your fitting?

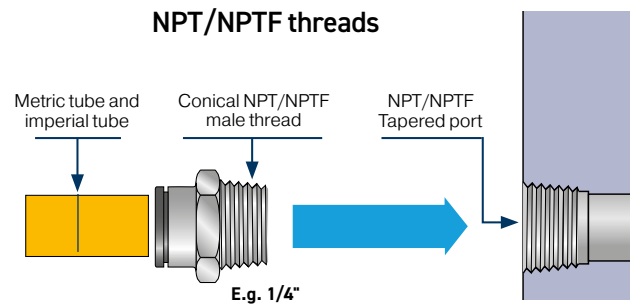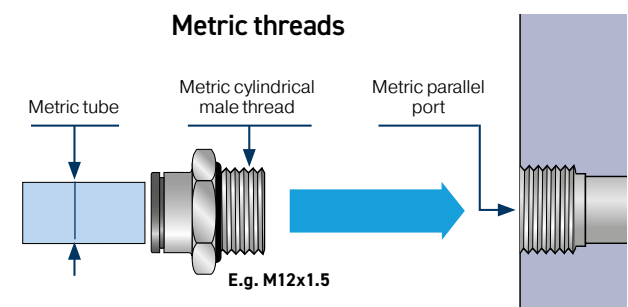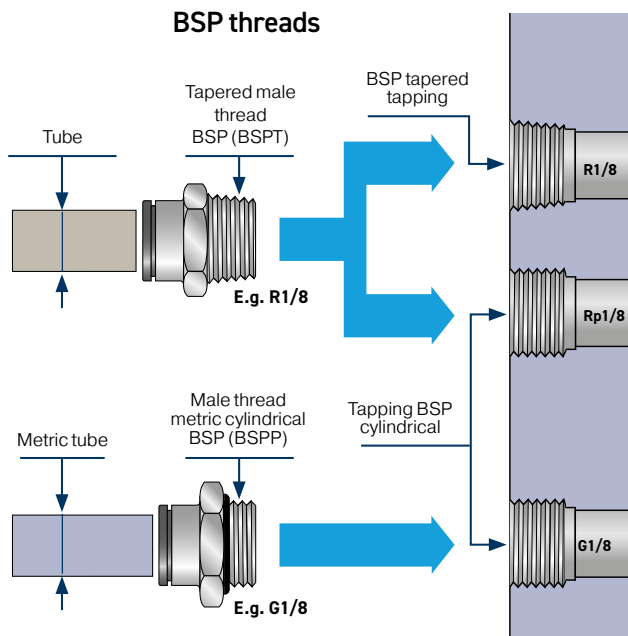

Part number identification

Part numbers are chosen according to a mnemonic code.

Each fitting is identified by:

- the item type according to function (4 digits);
- the nominal diameter of the tube (2 digits) corresponds to the external diameter of the tube;
- the thread code. If the product does not have a thread, the code used is 00.

7010

06

10

Nominal diameter

= outer diameter of the tube


Metric	Code
4 mm	04
6 mm	06
.../...	
12 mm	12

Thread code

Thread	Code
M5x0.8	19
1/8"	10
1/4"	13
3/8"	17
1/2"	21

Function of the article

Designation	Item code	Designation	Item code	Designation	Item code
Blocking fittings	 788x Series	Pressure regulator fittings	 730x Series	Flow regulators	
Soft start fittings	 786x Series 787x Series	Pressure reducers	 DRVx Series	• polymer countersunk screw	 701x Series
Non-return valves		Snap fittings	 792x Series 796x Series	• polymer external screw	 706x Series
• polymer	 798x Series 799x Series	Manually operated fittings and valves	 780x Series 0669 Series	• miniature polymer external screw	 763x, 764x, and 766x series
• adjustable	 793x Series	Sensor fittings for detection	 781x Series 782x Series	• polymer compact and swivelling	 704x Series; 764x Series
• stainless steel	 489x Series	Silencers	 067x Series 068x Series	• polymer external screw	 777x Series
• piloted	 789x Series			• Nickel-plated brass countersunk screw	 713x, 714x and 716x Series
Quick-exhaust valves	 7899 Series 797x Series			• Nickel-plated brass compact with external screw	 710x Series; 711x Series; 768x Series
				• Nickel-plated brass miniature with external screw	 718x Series; 719x Series
				• brass and stainless steel with external screw or in-line	 781x Series; 782
				• aluminium in line	 717x Series



In the event of a drop in control pressure, the reliability of Legris blocking fittings ensures operator safety and protects installations by cutting off the compressed air supply.

Technical specifications



Fluids: compressed air



Operating pressure: 1 to 10 bar



Operating temperature: -20°C to +80°C



Tube diameter: 6 to 12 mm



Connection: G1/8 to G1/2 (BSPP) – R1/8 to R1/2 (BSPT)



Regulations: RoHS, REACH, ISO 14743, PED, ISO 13849-1

Performance depends on the fluid, material and tube used.

Component materials


Seals:
NBR

Push buttons:
polymer

Body: nickel-plated
brass

Gripping ring:
stainless steel

Adaptor: nickel-plated brass

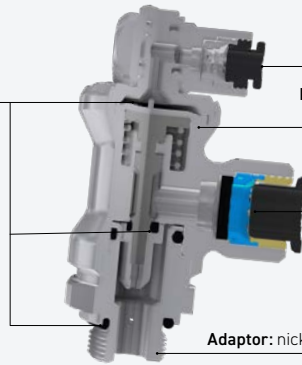

Benefits


- **Safety product** : endurance tested in accordance with the requirements of DI 2006/42/EC (B10d > 400 million cycles according to ISO 19973).
- **Optimal flow rate** ensuring good cylinder performance.
- **Compact design** to suit all configurations of the pneumatic installation.
- **360° adjustable** for easy installation.
- **Metal version** designed to withstand sparks in welding processes and harsh environments.

Recommended applications




Operating principle


Cylinder in operation (pilot signal active)

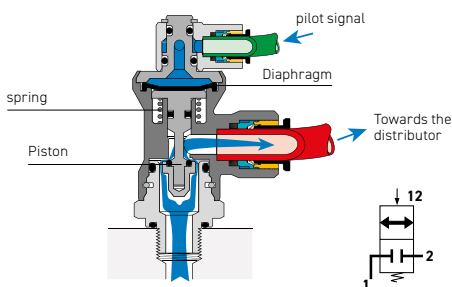


Pilot signal authorises movement



Blocked cylinder (de-piloted)

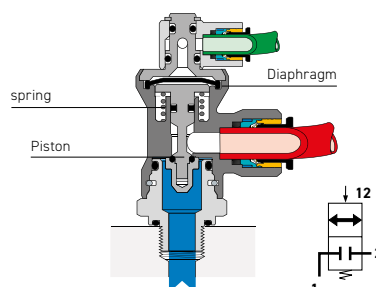


No signal blocks movement



Installation guide

Mounted in pairs, the cylinder blocking fittings are installed directly on the cylinder. Their total orientability provides great flexibility for the creation of pneumatic circuits.



Tightening torque maximum (daN.m)	Threads			
	G1/8	G1/4	G3/8	G1/2
	0.8	1.2	3	3.5

User guide

Model	Flow rate inlet 6 bar	Pilot and de-pilot threshold depending on inlet pressure					
			2 bar	4 bar	6 bar	8 bar	10 bar
ØD 6 and 8 mm, G1/8, G1/4, R1/8, R1/4 threads	650 NI/min	Pilot pressure	2.40	2.90	3.30	3.60	4.00
	650 NI/min	Depilot Pressure	1.50	1.80	2.15	2.40	2.80
ØD 10 and 12 mm, G3/8, G1/2, R3/8, R1/2 threads	1600 NI/min	Pilot pressure	2.70	3.20	3.50	3.80	4.10
	1600 NI/min	Depilot Pressure	1.40	1.80	2.10	2.40	2.70

7880

Blocking Fitting, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	G1/8	7880 06 10
	G1/4	7880 06 13
8	G1/4	7880 08 13
	G3/8	7880 08 17
10	G3/8	7880 10 17
12	G1/2	7880 12 21

7885

Blocking Fitting, Male BSPT Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	R1/8	7885 06 10
	R1/4	7885 06 13
8	R1/4	7885 08 13
	R3/8	7885 08 17
10	R3/8	7885 10 17
12	R1/2	7885 12 21

Pre-coated thread

7881

Blocking Fitting, Male/Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



C1	C2	References
G1/8	G1/4	7881 13 10
G1/4	G1/4	7881 13 13
G3/8	G3/8	7881 17 17
G1/2	G1/2	7881 21 21

7886

Blocking Fitting, Male/Female BSPT Thread

Nickel-plated brass, NBR



Scan for more dimensions



C1	C2	References
R1/8	R1/4	7886 13 10
R1/4	R1/4	7886 13 13
R3/8	R3/8	7886 17 17
R1/2	R1/2	7886 21 21

Pre-coated thread

7883

Blocker/Flow Regulator, Exhaust, Male BSPP Thread

Nickel-plated brass, technical polymer, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7883 04 10
6	G1/8	7883 06 10
	G1/4	7883 06 13
8	G1/4	7883 08 13
	G3/8	7883 08 17

Combination of blocking and flow regulation functions
Working temperature: 0 to 70°C




Following a compressed air cut-off, the reliability of these Legris fittings ensures that the system is gradually repressurised to guarantee operator safety and prevent industrial risks.

Technical specifications

- Fluids:** compressed air
- Operating pressure:** 3 to 10 bar
- Operating temperature:** -15°C to +60°C
- Tube diameter:** 8 to 10 mm
- Connection:** G1/4 to G3/8 (BSPP)
- Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

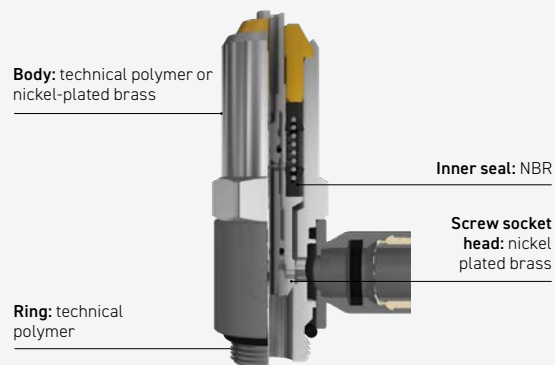

Benefits


- **Pressurisation time adjustment** to suit most pneumatic installations.
- **Securing the adjustment** with a countersunk screw to prevent accidental misalignment.
- **Identification by coloured rings facilitates installation:** yellow for FRL and black for distributor.

Recommended applications




Operating principle

Version for FRL

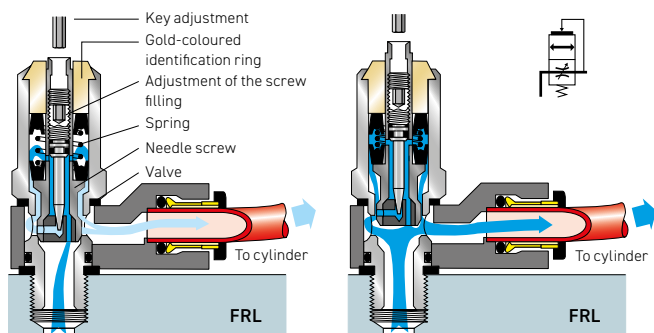

Version for distributor

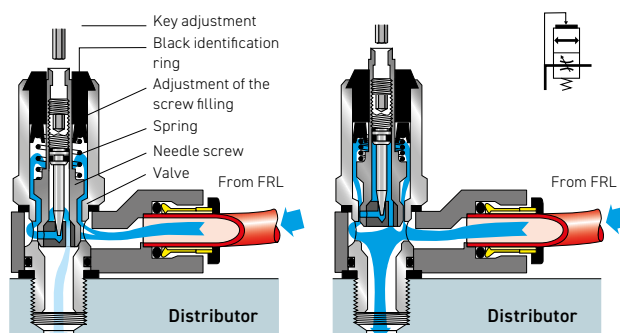

Installation guide


Tightening torque Maximum (daN.m)	Threads	
	G1/4	G3/8
	0.5	0.6

Adjustment of the needle screw

Adjusting the needle valve optimises the filling time according to the volume and specific characteristics of the installation.

To adjust:

- immobilise the piston using a 4 mm spanner
- adjust the needle screw with a hex key
 - 1.5 mm spanner for Ø 8 mm and 7871 model
 - 2.5 mm spanner for Ø 10 and 12 mm




Maximum tightening torque: 0.1 daN.m

User guide

	Model	Flow rate at 6 bar	Kv
Vent characteristics (NI/min)	7860 08 13	1500 NI/min	0.80
	7860 10 13	2100 NI/min	1.20
	7860 10 17	2200 NI/min	1.30
	7860 12 17	3100 NI/min	1.00
	7860 12 21	3100 NI/min	1.00
	7861 13 13	2100 NI/min	1.20
	7861 17 17	3100 NI/min	1.00
	7861 21 21	3100 NI/min	1.00
	7870 08 13	1500 NI/min	0.80
	7870 10 13	2000 NI/min	1.15
	7870 10 17	2000 NI/min	1.15
	7871 13 13	2000 NI/min	1.15
	7871 17 17	2000 NI/min	1.15

Cylinder pressure cycle

When the downstream pressure reaches two-thirds of the supply pressure, full flow is automatically established.

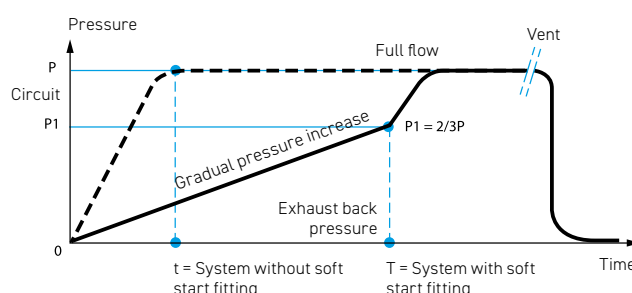

7860

Soft Start Fitting for Isolating Valve,
Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
8	G1/4	7860 08 13
10	G1/4	7860 10 13
	G3/8	7860 10 17

7870

Soft Start Fitting for Control Valve,
Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
8	G1/4	7870 08 13
10	G1/4	7870 10 13
	G3/8	7870 10 17

7871

Soft Start Fitting for Control Valve,
Male/Female BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/4	7871 13 13



Thanks to their robustness, Legris non-return valves allow compressed air to pass in one direction while blocking it in the other, thus ensuring optimum protection for the installation.


TECHNICAL POLYMER NON-RETURN VALVES

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 0.3 to 10 bar with minimum trigger threshold of 0.3 bar
-  **Operating temperature:** 0°C to +70°C
-  **Tube diameter:** 4 to 12 mm
-  **Connection:** G1/8 to G1/2 (BSPP) – R1/8 to R1/2 (BSPT)
-  **Regulations:** RoHS, REACH, PED, ISO 13849-1

Performance depends on the fluid, material and tube used.

Component materials

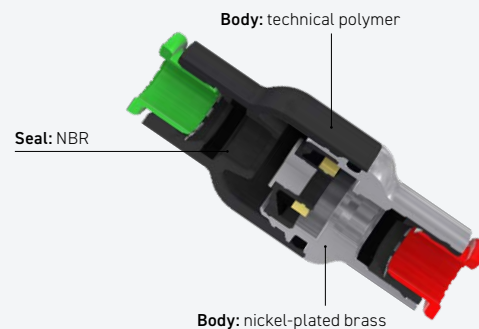


Benefits

- **“Safety” product** : endurance tested in accordance with the requirements of DI 2006/42/EC (B10d > 100 million cycles according to ISO 19973).
- **Easy to assemble** thanks to the arrow indicating the direction of fluid flow.
- **Secure assembly** thanks to colour coding indicating the function at the supply (green) and exhaust (red).
- **Available in threaded or push-in versions** to fit into any configuration.

Recommended applications




Operating principle

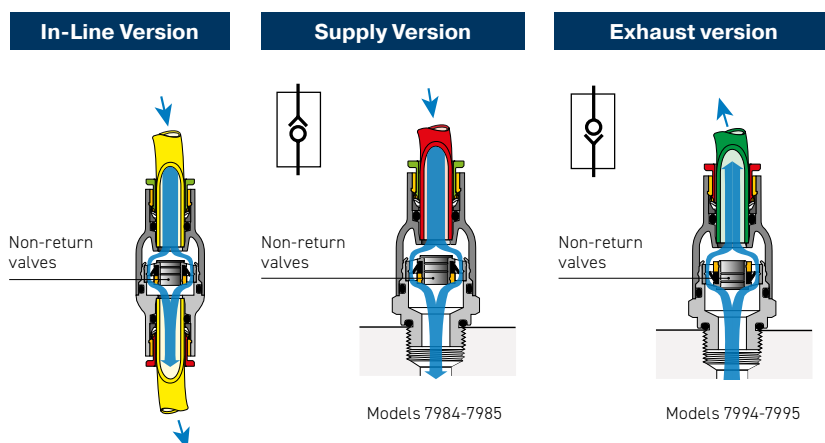

Installation guide

Installation diagram



User guide

	Diameters	Air flow rate at 6 bar
Flow characteristics (NI/min)	4 mm	350 NI/min
	6 mm	670 NI/min
	8 mm	1080 NI/min
	10 mm	2230 NI/min
	12 mm	2300 NI/min

7996

In-Line Equal Non-Return Valve

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	7996 04 00
6	7996 06 00
8	7996 08 00
10	7996 10 00
12	7996 12 00

7984

In-Line Non-Return Valve, Supply, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7984 04 19
	G1/8	7984 04 10
6	G1/8	7984 06 10
	G1/4	7984 06 13
8	G1/8	7984 08 10
	G1/4	7984 08 13

7994

In-Line Non-Return Valve, Exhaust, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7994 04 19
	G1/8	7994 04 10
6	G1/8	7994 06 10
	G1/4	7994 06 13
8	G1/8	7994 08 10
	G1/4	7994 08 13
12	G1/2	7994 12 21

7985

In-Line Non-Return Valve, Supply, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	R1/8	7985 04 10
6	R1/8	7985 06 10
	R1/4	7985 06 13
8	R1/8	7985 08 10
	R1/4	7985 08 13
12	R1/2	7985 12 21

Pre-coated thread

7995

In-Line Non-Return Valve, Exhaust, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	R1/8	7995 06 10
	R1/4	7995 06 13
8	R1/4	7995 08 13
12	R3/8	7995 12 17

Pre-coated thread




VERSION 316L STAINLESS STEEL NON-RETURN VALVES

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 0.25 to 40 bar with trigger threshold at 0.25 bar
-  **Operating temperature:** -20°C to +180°C
-  **Nominal diameter:** 10 to 25 mm
-  **Connection:** G1/8 to G1" (BSPP) – R1/8 to R1 (BSPT) – NPT1/8 to 1/2
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

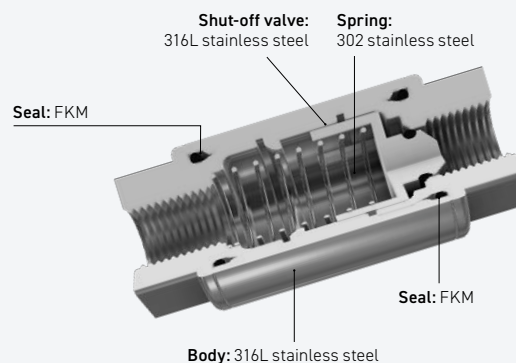

Benefits

- **Designed with robust materials** to withstand harsh and corrosive environments.
- **Smooth exterior design** with no retention areas, designed to facilitate cleaning and prevent contamination.
- **Secure installation** thanks to the arrow indicating the direction of installation.

User guide

Flow characteristics in water	Threads	NI/min	Kv
	G1/8	18.88	1.60
	G1/4	19.91	1.69
	G3/8	35.54	3.01
	G1/2	36.50	3.10
	G3/4	65.86	5.59
	G1	92.60	7.86

4890

Non-Return Valve, Female BSPP Thread

Stainless steel 316L, FKM



Scan for more dimensions



DN	C	References
10	G1/8	4890 10 10
	G1/4	4890 13 13
15	G3/8	4890 17 17
	G1/2	4890 21 21
20	G3/4	4890 27 27
25	G1	4890 34 34

4892

Non-Return Valve, Supply, Female BSPP Thread/Exhaust, Male BSPP Thread

Stainless steel 316L, FKM



Scan for more dimensions



DN	C	C1	References
10	G1/8	R1/8	4892 10 10
	G1/4	R1/4	4892 13 13
15	G3/8	R3/8	4892 17 17
	G1/2	R1/2	4892 21 21
20	G3/4	R3/4	4892 27 27
25	G1	R1	4892 34 34

4891

Non-Return Valve, Supply, Male BSPP Thread/Exhaust, Female BSPP Thread

Stainless steel 316L, FKM



Scan for more dimensions



DN	C	C1	References
10	R1/8	G1/8	4891 10 10
	R1/4	G1/4	4891 13 13
15	R3/8	G3/8	4891 17 17
	G1/2	G1/2	4891 21 21
20	R1/8	G3/4	4891 27 27
25	R1	G1	4891 34 34

4895

Non-Return Valve, Female NPT Thread

Stainless steel 316L, FKM



Scan for more dimensions



DN	C	References
10	NPT1/8	4895 11 11
	NPT1/4	4895 14 14
15	NPT3/8	4895 18 18
	NPT1/2	4895 22 22




In addition to their non-return function, the design of these Legris fittings offers customers the possibility of precisely adjusting the opening threshold of the shut-off valve for greater flexibility of use.

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 0 to 12 bar
-  **Operating temperature:** -20°C to +80°C
-  **Connection:** G1/8 to G1/2 (BSPP)
-  **Regulations:** RoHS, REACH, PED, FDA

Performance depends on the fluid, material and tube used.

Component materials

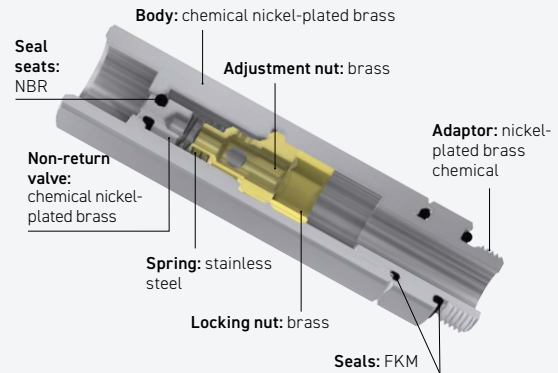

Benefits


- Ease of use** through precise adjustment of the valve opening threshold with two hex keys.
- Optimal safety** thanks to the locking nut, which prevents any misalignment caused by vibrations or accidental manipulation.
- Surface treatment reinforced by high phosphorus chemical nickel plating**, offering resistance suited to the stringent requirements of the food processing industry and other harsh environments.

Recommended applications




Operating principle

Step 1




Unscrew the locking nut with an Allen key.

Step 2



Unscrew the adjustment nut with a smaller Allen key to adjust the cracking pressure. The number of turns allows the cracking pressure from 1 bar to 0.10 bar.

Step 3



Tighten the locking nut with the Allen key to lock the cracking pressure setting. Then control the pressure with a pressure gauge downstream.

Installation guide

Maximum tightening torque (daN.m)	Threads			
	G1/8	G1/4	G3/8	G1/2
	0.8	1.2	3	3.5

User guide

Valve opening threshold	Threads	0 to 4 turns (indicative values)
	G1/8- G1/4	1 to 0.10 bar
	G3/8 G1/2	1 to 0.15 bar 1 to 0.20 bar

7930

Adjustable Check Valve Exhaust,
Double Female BSPP and Metric
Thread

Chemical Nickel-plated brass, FKM



Scan for more
dimensions



C	References
G1/8	7930 10 10
G1/4	7930 13 13
G3/8	7930 17 17
G1/2	7930 21 21

7931

Adjustable Check Valve Supply,
Male/Female BSPP Thread

Chemical Nickel-plated brass, FKM



Scan for more
dimensions



C	References
G1/8	7931 10 10
G1/4	7931 13 13
G1/2	7931 21 21

7932

Adjustable Check Valve Exhaust,
Male/Female BSPP Thread

Chemical Nickel-plated brass, FKM



Scan for more
dimensions



C	References
G1/8	7932 10 10
G1/4	7932 13 13
G3/8	7932 17 17
G1/2	7932 21 21




Legris pilot-operated non-return fittings are a simple, effective and economical solution for customers seeking to control the protection of their installations. This 3-in-1 version combines control, flow regulation and purging.

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 1 to 10 bar
-  **Operating temperature:** -5°C to +60°C
-  **Tube diameter:** 6 to 12 mm
-  **Connection:** G1/8 to G1/2 (BSPP)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

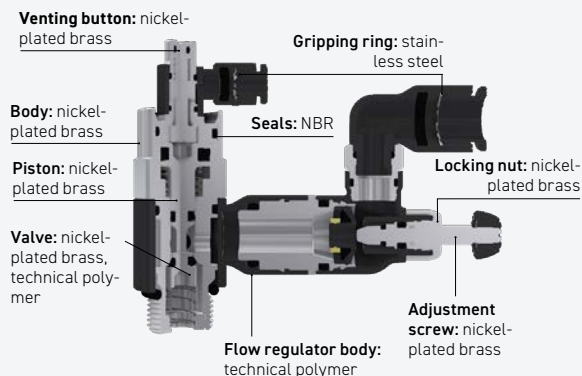

Benefits


- **Time savings during assembly** thanks to three functions integrated into a single-piece product: pilot-operated non-return valve, flow regulator, manual exhaust valve.

Recommended applications




Operating principle

Normal operation

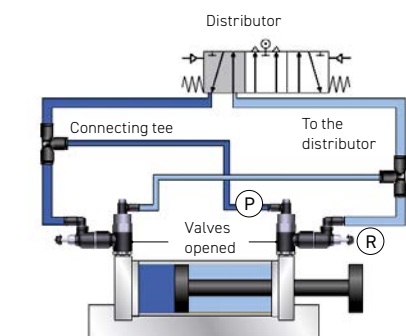


Pilot signal (P)
Cylinder speed control (R)

Emergency shutdown or pressure drop

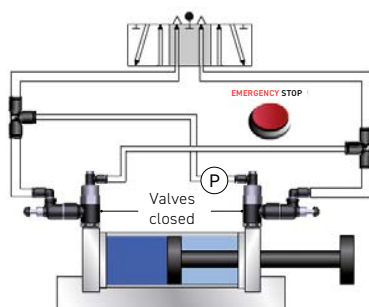

Pilot pressure drop (P) = cylinder rod blocked

Venting operation

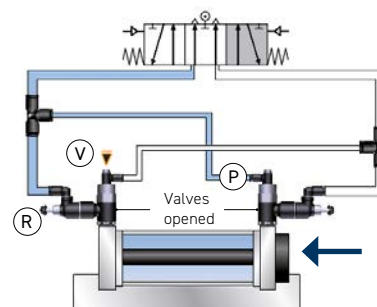

Venting (V) returns the cylinder rod to the start position, emptying the pressure chamber through the flow regulator (R) and the pilot line (P)

User guide

Model	Pilot and unpilot threshold					
		2 bar	4 bar	6 bar	8 bar	10 bar
G1/8	Pilot pressure	1.2	1.72	2.44	2.96	3.56
	Depilot Pressure	0.56	0.96	1.12	1.76	2.12
G1/4	Pilot pressure	0.92	1.52	2.12	2.68	3.28
	Depilot Pressure	0.64	1.16	1.68	2.16	2.64
G3/8	Pilot pressure	1.12	1.84	2.56	3.32	4.08
	Depilot Pressure	0.64	1.04	1.44	1.84	2.36
G1/2	Pilot pressure	1.04	1.60	2.12	2.76	3.88
	Depilot Pressure	0.76	1.28	1.76	2.20	2.72

Maximum flow rate at 6 bar (NI/min)	7894 06 10	7894 06 13	7894 08 10	7894 08 13	7894 08 17	7894 10 17	7894 10 21	7894 12 21
Adjustment direction	250	475	240	585	875	940	1535	1560
Return direction	365	620	355	815	1085	1205	1860	1940

7892

Piloted Non-Return Valve, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	G1/8	7892 06 10
	G1/4	7892 06 13
8	G1/8	7892 08 10
	G1/4	7892 08 13
	G3/8	7892 08 17
10	G3/8	7892 10 17
	G1/2	7892 10 21
12	G1/2	7892 12 21

7894

Piloted Non-Return Valve with Flow Regulator Exhaust, Male BSPP Thread

Technical polymer, Nickel-plated brass



Scan for more dimensions



ØD	C	References
6	G1/8	7894 06 10
	G1/4	7894 06 13
8	G1/8	7894 08 10
	G1/4	7894 08 13
	G3/8	7894 08 17
10	G3/8	7894 10 17
	G1/2	7894 10 21
12	G1/2	7894 12 21



Legris flow regulators combine precision, consistent adjustment and compactness to deliver the best performance in pneumatic installations, whether mounted directly on the cylinder or in line.


VERSION TECHNICAL POLYMER FLOW CONTROL REGULATORS

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 1 to 10 bar
-  **Operating temperature:** 0°C to +70°C
-  **Tube diameter:** 4 to 12 mm
-  **Connection:** M3 to M5 – G1/8 to G1/2 (BSPP) – RP1/8 to 1/2 (BSPT)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

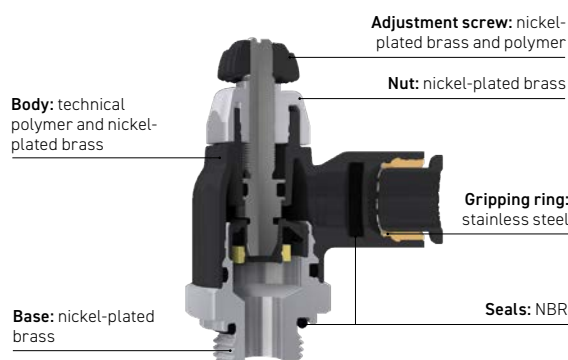

Benefits

- **Best flow rate on the market**, optimising the speed of movement of the cylinder rod for increased productivity.
- **Precise and gradual adjustment**, ensuring flow stability over time and greater application accuracy.
- **Optimised ergonomics thanks to:**
 - A visible screw for easy adjustment without tools, with a locking mechanism to secure the setting.
 - A more compact recessed screw offering enhanced security.
- **360° orientation**, enabling flexible and simplified installation in all installations.
- **Visual identification on the product** (pneumatic symbol and letter A/B/C) for quick identification of the function.

Installation guide

Maximum tightening torque (daN.m) <i>external screw</i>	Threads	M3x0.5	M5x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.06	0.16	0.8	1.2	3	3.5
Maximum tightening torque (daN.m) <i>recessed screw</i>	Threads	-	M5x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	-	0.1	0.4	0.5	0.6	0.7

Recommended applications



Precisely adjusts the air flow in the cylinder chamber for optimal control of the rod speed



Precisely adjusts the air flow to suit different machine equipment

VERSION NICKEL-PLATED BRASS/TREATED ALUMINIUM

Technical specifications


-  **Fluids:** compressed air
-  **Operating pressure:** 1 to 10 bar
-  **Operating temperature:** -25°C to +70°C
-  **Tube diameter:** 4 to 14 mm
-  **Connection:** M5 – G1/8 to G1/2 (BSPP)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Benefits

Nickel-plated brass flow regulators offer the same advantages as the technical polymer version but **can be used in aggressive environments**.

Component materials

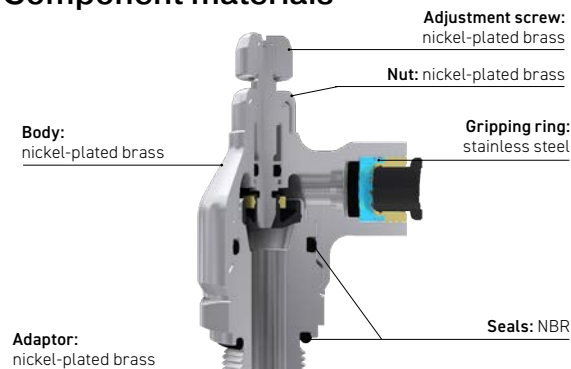

Installation guide

Maximum tightening torque (daN.m) <i>external screw</i>	Threads	M5x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.16	0.8	1.2	3	3.5
Maximum tightening torque (daN.m) <i>recessed screw</i>	Threads	M5x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.1	0.4	0.5	0.6	0.7

VERSION STAINLESS STEEL FLOW REGULATORS

Technical specifications


-  **Fluids:** compressed air
-  **Operating pressure:**
Regulators: 1 to 10 bar
In-line regulators: 1 to 40 bar
-  **Operating temperature:**
Regulators: 0°C to +70°C
In-line regulators: -15°C to +120°C
-  **Connection:** M5 - G1/8 to G1/2 (BSPP)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Benefits

Stainless steel flow regulators offer the same advantages as the technical polymer version but **can be used in aggressive and corrosive environments**.

Component materials

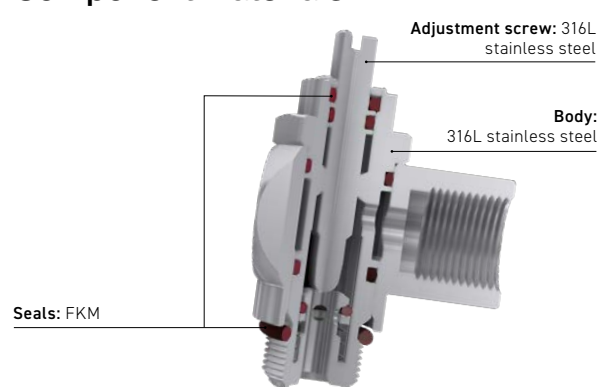

Installation guide

Maximum tightening torque (daN.m) <i>external screw</i>	Threads	M5x0.8	G1/8	G1/4	G3/8	G1/2
	daN.m	0.16	0.8	1.2	3	3.5




Operating principle


Depending on the model, Legris flow control regulators are either unidirectional or bidirectional. Unidirectional in type, they regulate air flow in one direction by means of an adjustable restriction and allow air to pass freely in the other direction. Bidirectional, they allow the air flow to be adjusted in both directions. A more precise and consistent flow rate adjustment is achieved with a regulator mounted on the cylinder exhaust.

RECESSED SCREW MODELS


Unidirectional exhaust model

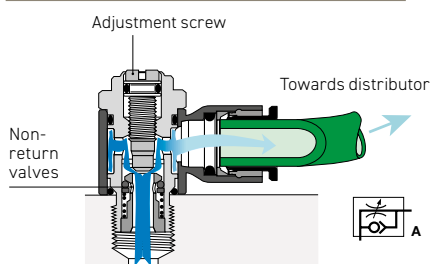

Unidirectional supply model

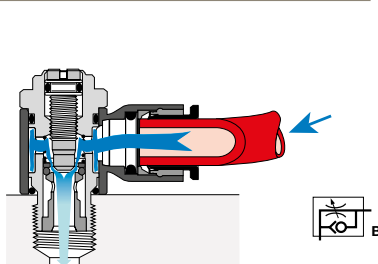


Bidirectional model

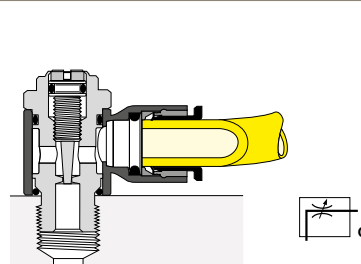


EXTERNAL SCREW MODELS


Unidirectional exhaust model

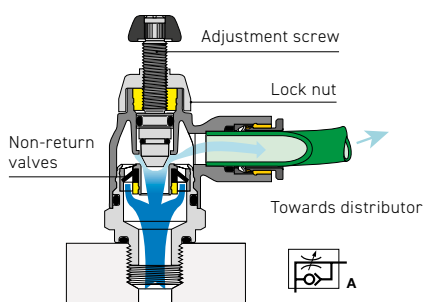

Unidirectional supply model




Bidirectional model




IN-LINE MODELS

Unidirectional model

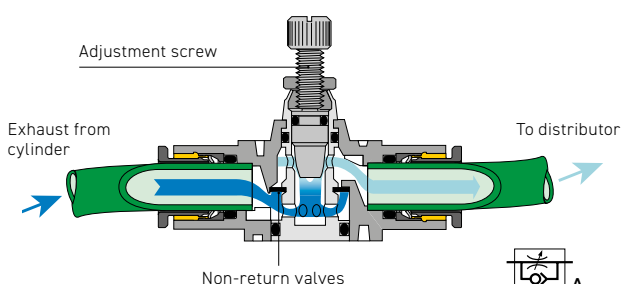

Bidirectional model

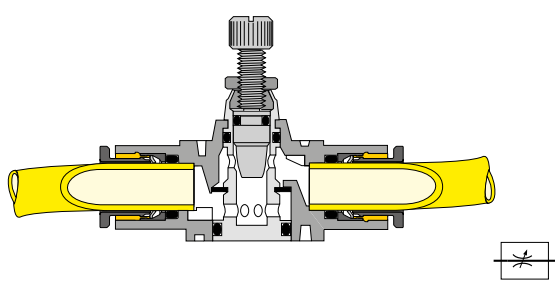

For instant visual identification, each version of Legris flow control regulator is identified by the corresponding pneumatic symbol and a letter:

- Unidirectional adjustment on exhaust: letter A
- Unidirectional adjustment on supply: letter B
- Bidirectional adjustment: letter C

Flow control regulators in technical polymer

7010

Flow Regulator Exhaust Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7010 04 19
	G1/8	7010 04 10
6	M5x0.8	7010 06 19
	G1/8	7010 06 10
8	G1/4	7010 08 10
	G1/8	7010 08 13
10	G3/8	7010 10 13
	G1/2	7010 10 17
12	G3/8	7010 12 17
	G1/2	7010 12 21

7011

Flow Regulator Supply Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7011 04 19
	G1/8	7011 04 10
6	M5x0.8	7011 06 19
	G1/8	7011 06 10
8	G1/4	7011 08 10
	G1/8	7011 08 13
10	G3/8	7011 10 13
	G1/2	7011 10 17

7012

Bi-Directional Flow Regulator Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7012 04 19
	G1/8	7012 04 10
6	M5x0.8	7012 06 19
	G1/8	7012 06 10
8	G1/4	7012 08 10
	G1/8	7012 08 13
10	G3/8	7012 10 13
	G1/2	7012 10 17

7061

Compact Flow Regulator Supply, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7061 04 10
6	G1/8	7061 06 10
	G1/4	7061 06 13
8	G1/8	7061 08 10
	G1/4	7061 08 13
10	G3/8	7061 10 13
	G1/2	7061 10 17
12	G3/8	7061 12 17
	G1/2	7061 12 21

7060

Compact Flow Regulator Exhaust, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7060 04 10
6	G1/8	7060 06 10
	G1/4	7060 06 13
8	G1/8	7060 08 10
	G1/4	7060 08 13
10	G3/8	7060 10 13
	G1/2	7060 10 17
12	G3/8	7060 12 17
	G1/2	7060 12 21

7062

Bi-Directional Compact Flow Regulator, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7062 04 10
6	G1/8	7062 06 10
	G1/4	7062 06 13
8	G1/8	7062 08 10
	G1/4	7062 08 13
10	G3/8	7062 10 13
	G1/2	7062 10 17

7065

Compact Flow Regulator Exhaust, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	R1/8	7065 06 10
8	R1/8	7065 08 10
	R1/4	7065 08 13
10	R1/4	7065 10 13
	R3/8	7065 10 17
12	R1/2	7065 12 13
	R3/8	7065 12 17
14	R1/2	7065 14 13
	R3/8	7065 14 17

Pre-coated thread

7067

Bi-Directional Compact Flow Regulator, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	R1/8	7067 04 10
6	R1/8	7067 06 10
	R1/4	7067 06 13
8	R1/4	7067 08 10
	R3/8	7067 08 13
10	R1/2	7067 10 13
	R3/8	7067 10 17

Pre-coated thread

7668

Miniature Flow Regulator Supply, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	R1/8	7668 06 10
8	R1/8	7668 08 10
	R1/4	7668 08 13

Pre-coated thread

7660

Miniature Flow Regulator Exhaust,
Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
3	M3x0.5	7660 03 09
	M5x0.8	7660 03 19
	M3x0.5	7660 04 09
4	M5x0.8	7660 04 19
	G1/8	7660 04 10
	M5x0.8	7660 06 19
6	G1/8	7660 06 10
	G1/4	7660 06 13
	G1/8	7660 08 10
8	G1/4	7660 08 13
	G3/8	7660 08 17

7665

Miniature Flow Regulator Exhaust,
Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
4	R1/8	7665 04 10
	R1/8	7665 06 10
6	R1/4	7665 06 13
	R3/8	7665 06 17
	R1/8	7665 08 10
8	R1/4	7665 08 13
	R3/8	7665 08 17

Pre-coated thread

7662

Bi-Directional Miniature Flow
Regulator, Male BSPP and Metric
Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
4	M5x0.8	7662 04 19
	G1/8	7662 04 10
	M5x0.8	7662 06 19
6	G1/8	7662 06 10
	G1/4	7662 06 13

7669

Miniature Flow Regulator Supply,
Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
3	M3x0.5	7669 03 09
	M5x0.8	7669 03 19
	M5x0.8	7669 04 19
4	G1/8	7669 04 10
	M5x0.8	7669 06 19
	G1/8	7669 06 10
6	G1/4	7669 06 13
	G1/8	7669 08 10
	G1/4	7669 08 13
8	G3/8	7669 08 17

7040

Compact Flow Regulator Swivel
Outlet Exhaust, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
6	G1/8	7040 06 10
	G1/4	7040 06 13
	G1/8	7040 08 10
8	G1/4	7040 08 13
	G3/8	7040 08 17
	G1/4	7040 10 13
10	G3/8	7040 10 17
	G3/8	7040 12 17
12	G1/2	7040 12 21

7640

Miniature Swivel Outlet Flow
Regulator Exhaust, Male BSPP and
Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
4	M5x0.8	7640 04 19
	G1/8	7640 04 10
	M5x0.8	7640 06 19
6	G1/8	7640 06 10

7649

Miniature Swivel Outlet Flow
Regulator Supply, Male BSPP and
Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
4	M5x0.8	7649 04 19
	M5x0.8	7649 06 19
6	G1/8	7649 06 10

7770

In-Line One-Way Flow Regulator

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	References
4	7770 04 00
6	7770 06 00
8	7770 08 00
10	7770 10 00
12	7770 12 00

7772

Bi-Directional In-Line Flow Regulator

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



ØD	References
4	7772 04 00
6	7772 06 00
8	7772 08 00

7776

Panel-Mountable In-Line One-Way Flow Regulator

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	7776 04 00*
6	7776 06 00*
8	7776 08 00
10	7776 10 00
12	7776 12 00

* Ultrafine adjustment

7771

In-Line One-Way Flow Regulator, Female BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/8	7771 10 10
G1/4	7771 13 13
G3/8	7771 17 17
G1/2	7771 21 21

7000

Joining Clips

Technical polymer



Scan for more dimensions



ØD	References
4	7000 00 04
6-8	7000 00 05
10-12	7000 00 06

To be used with 7770, 7771, 7772 and 7776 series.

7030

Compact Plug-In Flow Regulator, Exhaust

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
6	7030 06 00
8	7030 08 00
12	7030 12 00

7031

Compact Plug-In Flow Regulator, Supply

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
6	7031 06 00
8	7031 08 00

7630

Miniature Plug-In Flow Regulator, Exhaust

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	7630 04 00
6	7630 06 00

7631

Miniature Plug-In Flow Regulator, Supply

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	References
4	7631 04 00
6	7631 06 00

Flow control regulators in nickel-plated brass / treated aluminium

7130

Flow Regulator, Exhaust, Male BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7130 04 19
	G1/8	7130 04 10
6	M5x0.8	7130 06 19
	G1/8	7130 06 10
	G1/4	7130 06 13
8	G1/8	7130 08 10
	G1/4	7130 08 13
	G3/8	7130 08 17
10	G1/4	7130 10 13
	G3/8	7130 10 17
	G1/2	7130 10 21
12	G3/8	7130 12 17
	G1/2	7130 12 21

7140

Flow Regulator Exhaust, Male/ Female BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
M5x0.8	7140 19 19
G1/8	7140 10 10
G1/4	7140 13 13
G3/8	7140 17 17
G1/2	7140 21 21

7160

Flow Regulator with Brass Compression Fitting, Exhaust, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7160 04 10
6	G1/8	7160 06 10
8	G1/8	7160 08 10
	G1/4	7160 08 13
10	G3/8	7160 10 17
12	G1/2	7160 12 21

7100

Compact Flow Regulator, Exhaust, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7100 04 10
6	G1/8	7100 06 10
	G1/4	7100 06 13
8	G1/8	7100 08 10
	G1/4	7100 08 13
	G3/8	7100 08 17
10	G1/4	7100 10 13
	G3/8	7100 10 17
12	G3/8	7100 12 17
	G1/2	7100 12 21
14	G1/2	7100 14 21

7101

Compact Flow Regulator, Supply, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7101 04 10
6	G1/8	7101 06 10
	G1/4	7101 06 13
8	G1/8	7101 08 10
	G1/4	7101 08 13

7680

Compact Flow Regulator, Exhaust, Male BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
6	G1/8	7680 06 10
8	G1/8	7680 08 10
	G1/4	7680 08 13
10	G3/8	7680 10 17

7110

Compact Flow Regulator Exhaust, Male/Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/8	7110 10 10
G1/4	7110 13 13
G3/8	7110 17 17
G1/2	7110 21 21

7111

Compact Flow Regulator Supply, Male/Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
G1/8	7111 10 10
G1/4	7111 13 13

7180

Miniature Flow Regulator Exhaust,
Male BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more
dimensions



ØD	C	References
4	M5x0.8	7180 04 19
	G1/8	7180 04 10
6	M5x0.8	7180 06 19
	G1/8	7180 06 10
8	G1/8	7180 08 10

7190

Miniature Flow Regulator Exhaust,
Male/ Female BSPP and Metric
Thread

Nickel-plated brass, NBR



Scan for more
dimensions



C	References
M5x0.8	7190 19 19
G1/8	7190 10 10

7170

Panel-Mountable In-Line Flow
Regulator, Female BSPP and Metric
Thread

Treated aluminium, NBR, brass



Scan for more
dimensions



C	References
M5x0.8	7170 19 19
G1/8	7170 10 10
G1/4	7170 13 13
G3/8	7170 17 17
G1/2	7170 21 21

Flow control regulators in stainless steel

7810

Flow Regulator Exhaust, Male/
Female BSPP and Metric Thread

Stainless steel 316L, FKM



Scan for more
dimensions



C	References
M5x0.8	7810 19 19
G1/8	7810 10 10
G1/4	7810 13 13
G3/8	7810 17 17
G1/2	7810 21 21

7812

Bi-Directional Flow Regulator, Male/
Female BSPP and Metric Thread

Stainless steel 316L, FKM



Scan for more
dimensions



C	References
M5x0.8	7812 19 19
G1/8	7812 10 10
G1/4	7812 13 13
G3/8	7812 17 17
G1/2	7812 21 21

7820

In-Line One-Way Flow Regulator,
Female BSPP Thread

Stainless steel 316L, FKM



Scan for more
dimensions



DN	C	References
7	G1/8	7820 00 10
7	G1/4	7820 00 13
9	G3/8	7820 00 17
12	G1/2	7820 00 21

7822

Bi-Directional In-Line Flow
Regulator, Female BSPP Thread

Stainless steel 316L, FKM



Scan for more
dimensions




DN	C	References
7	G1/8	7822 00 10
7	G1/4	7822 00 13
9	G3/8	7822 00 17
12	G1/2	7822 00 21




7010
7011
7012

7010

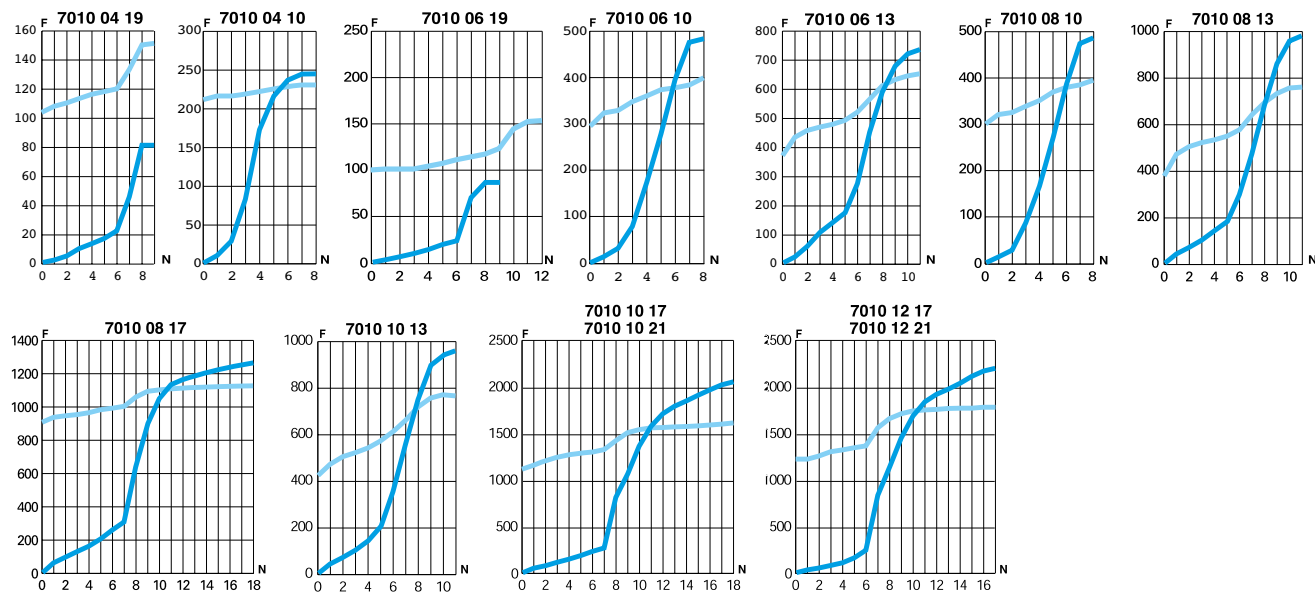

7011

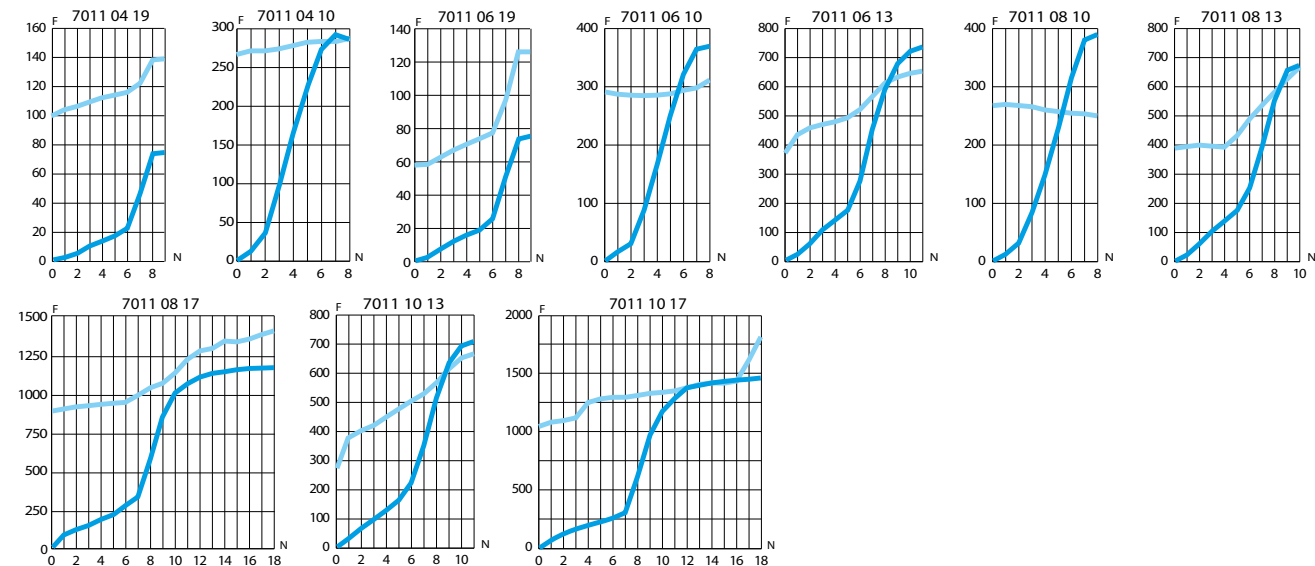

7012

Flow characteristics for model 7012:

- exhaust version (see model 7010, direction of adjustment)
- supply version (see model 7011, direction of adjustment)

6 bar

Direction of adjustment
 Return


F: Flow in Nl/min

N: Number of turns




7060
7061
7062

7060

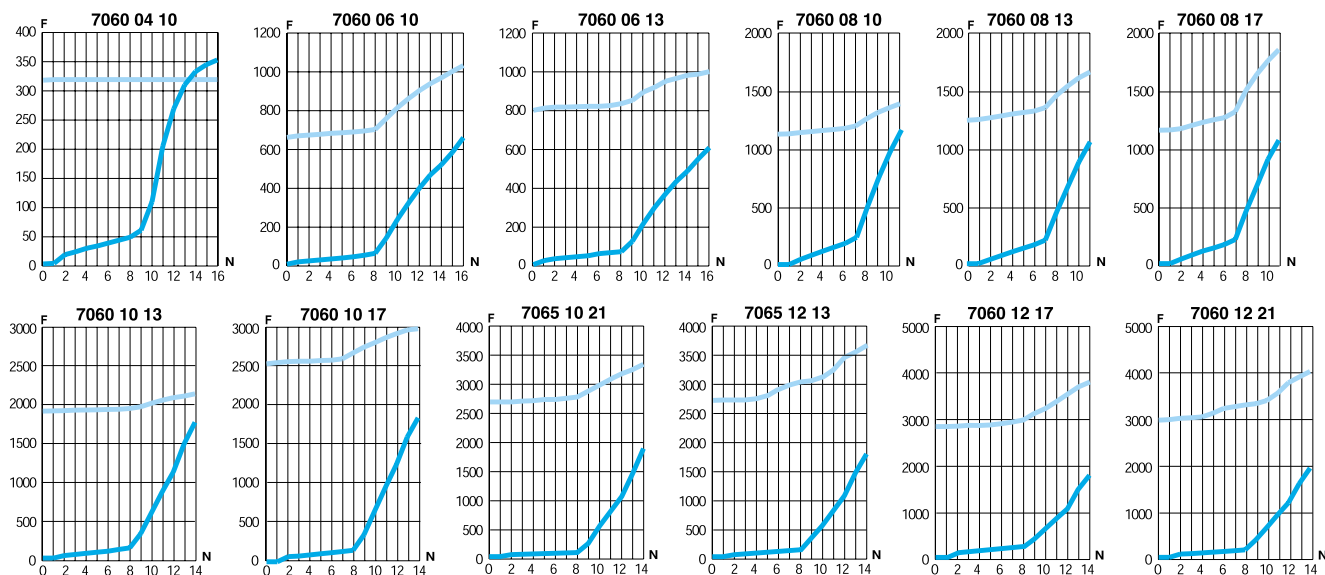

7061

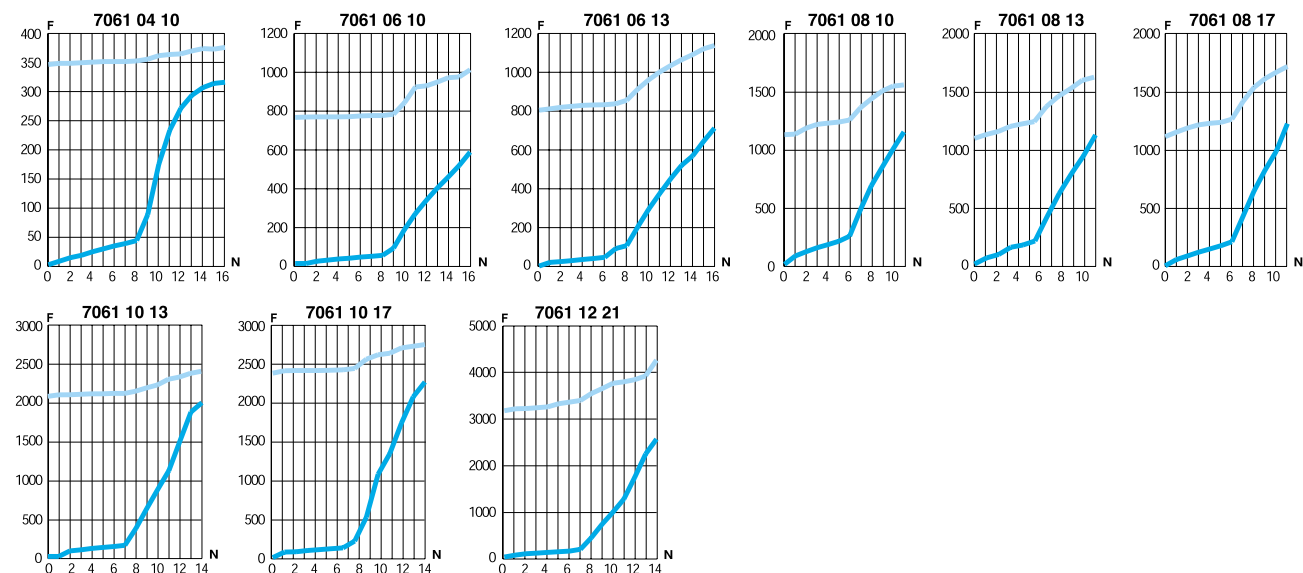

7062


Flow characteristics for model 7062:

- exhaust version (see model 7060, direction of adjustment)
- supply version (see model 7061, direction of adjustment)




7660
7669
7662

7660

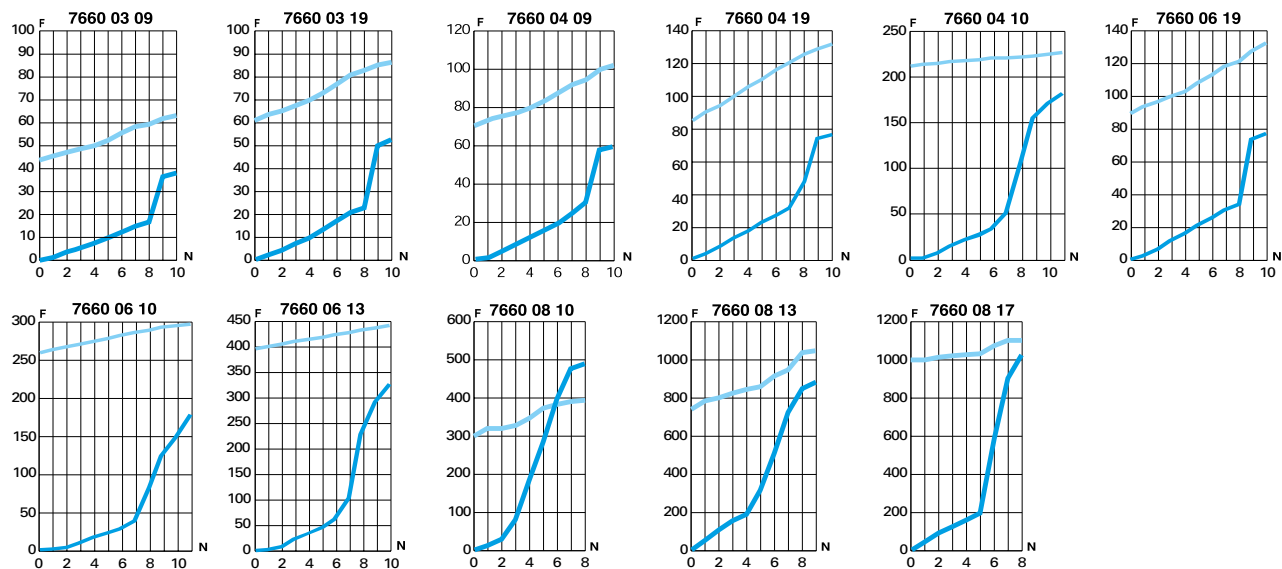

7669

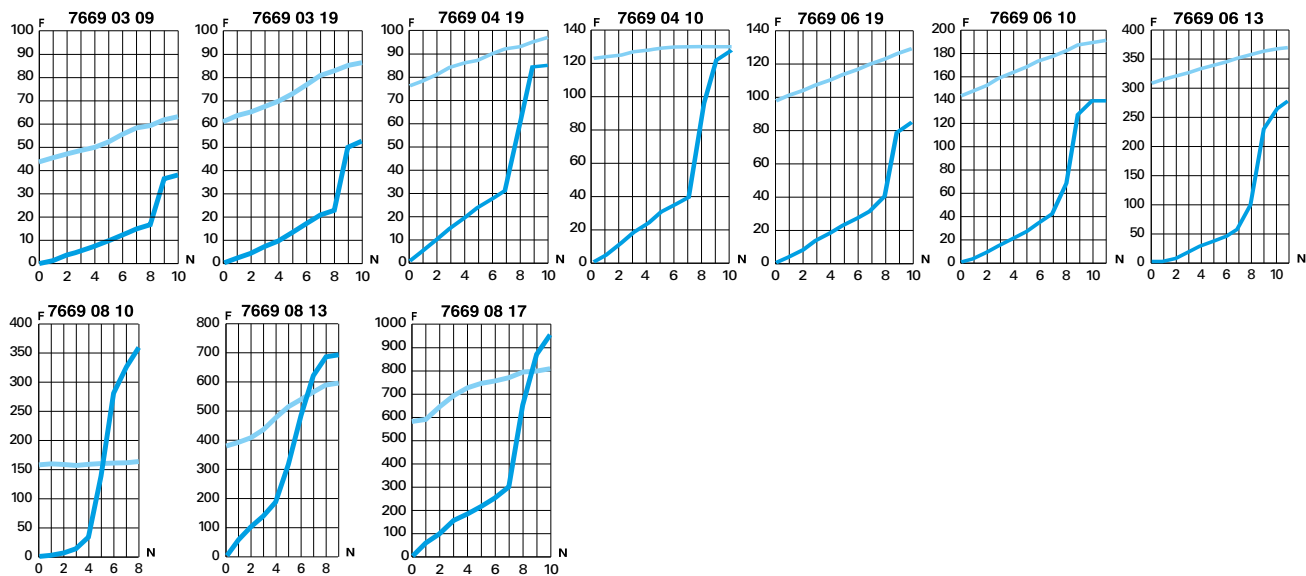

7662

Flow characteristics for model 7662:

- exhaust version: see model 7660, direction of adjustment
- supply version: see model 7669, direction of adjustment

6 bar

— Direction of adjustment
--- Return


F: Flow in Nl/min

N: Number of turns




7640 7649


7640

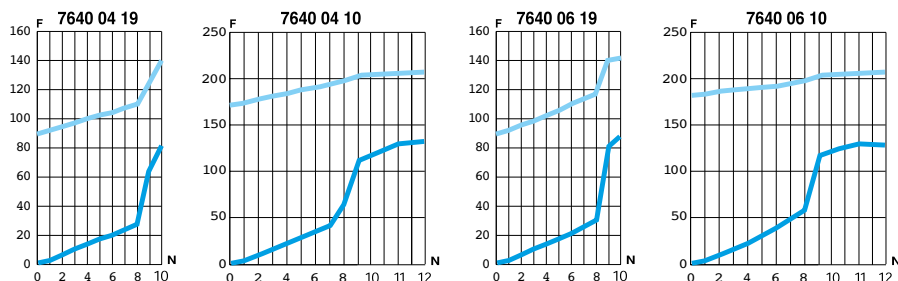


7649

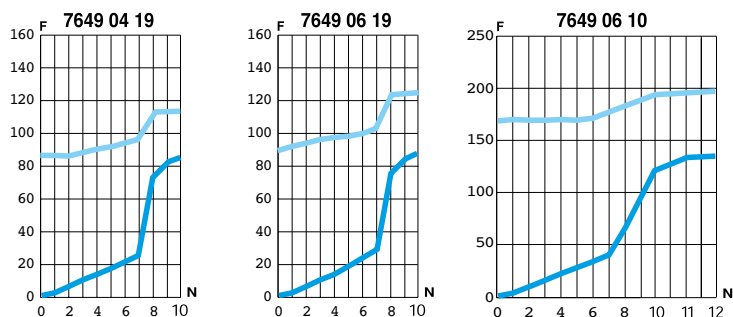

7771

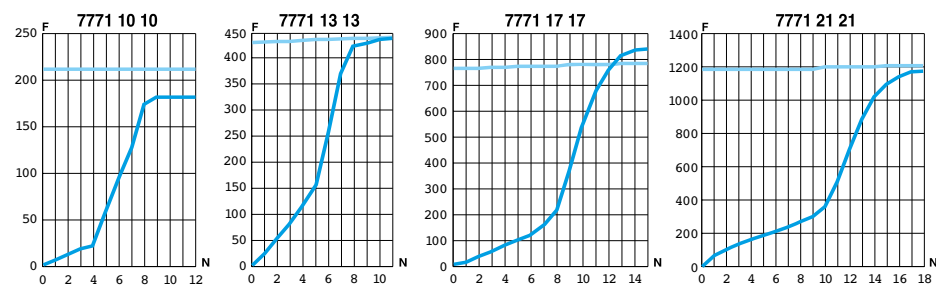


7020







7770

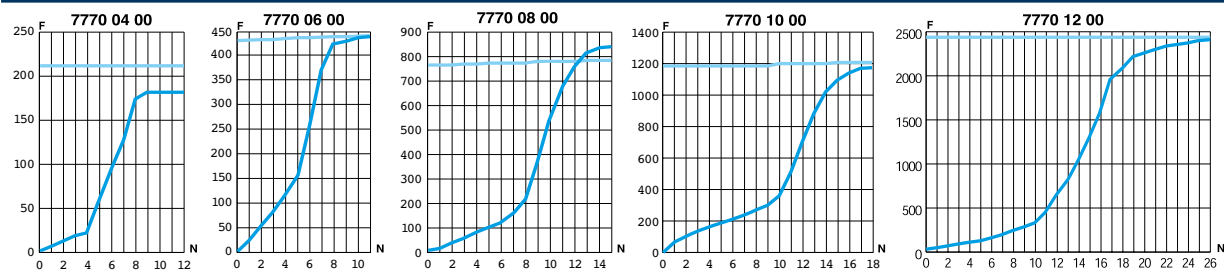


7776

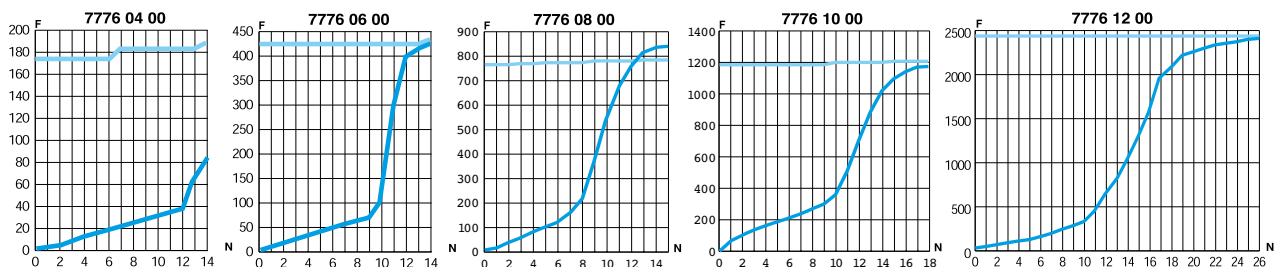

**7030
7031**

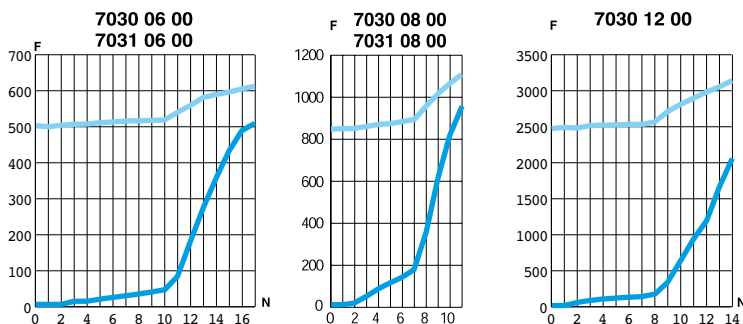

**7630
7631**

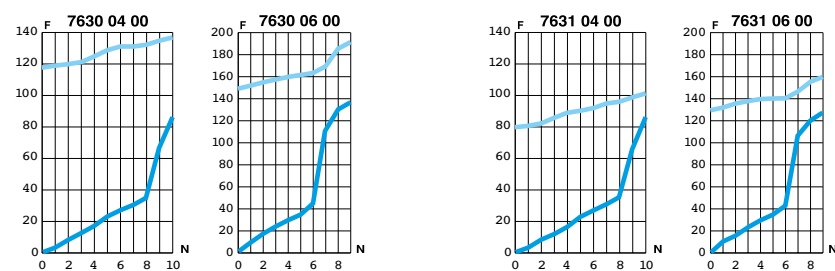

6 bar

— Direction of adjustment
— Return


F: Flow in NL/min

N: Number of turns




7065
7067

7065

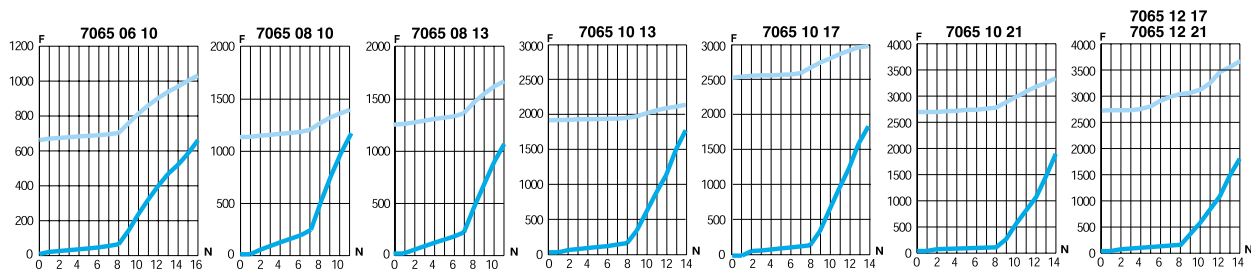


7067

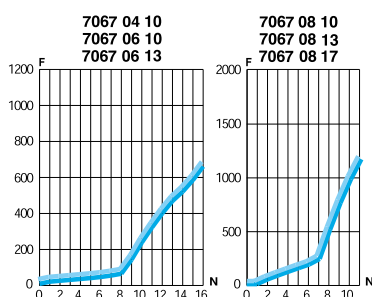


7665
7668

7665

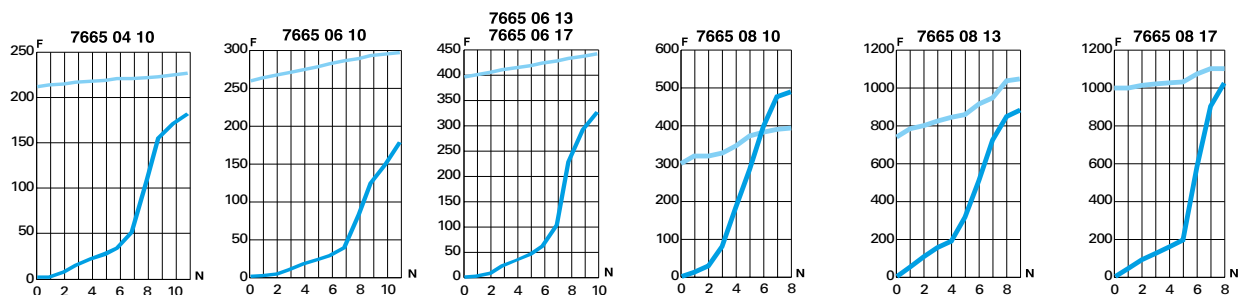


7668

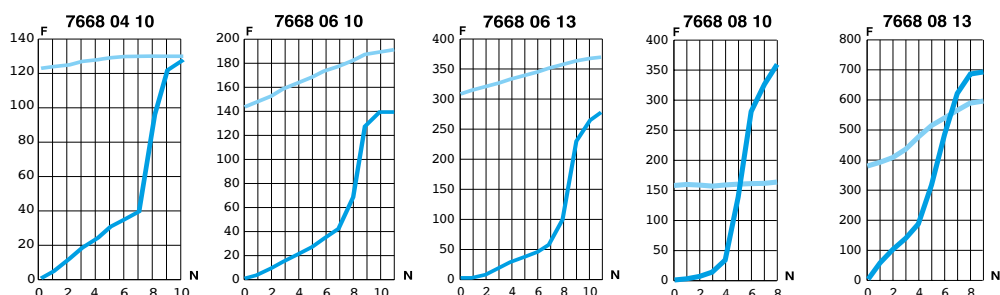




7045



7130

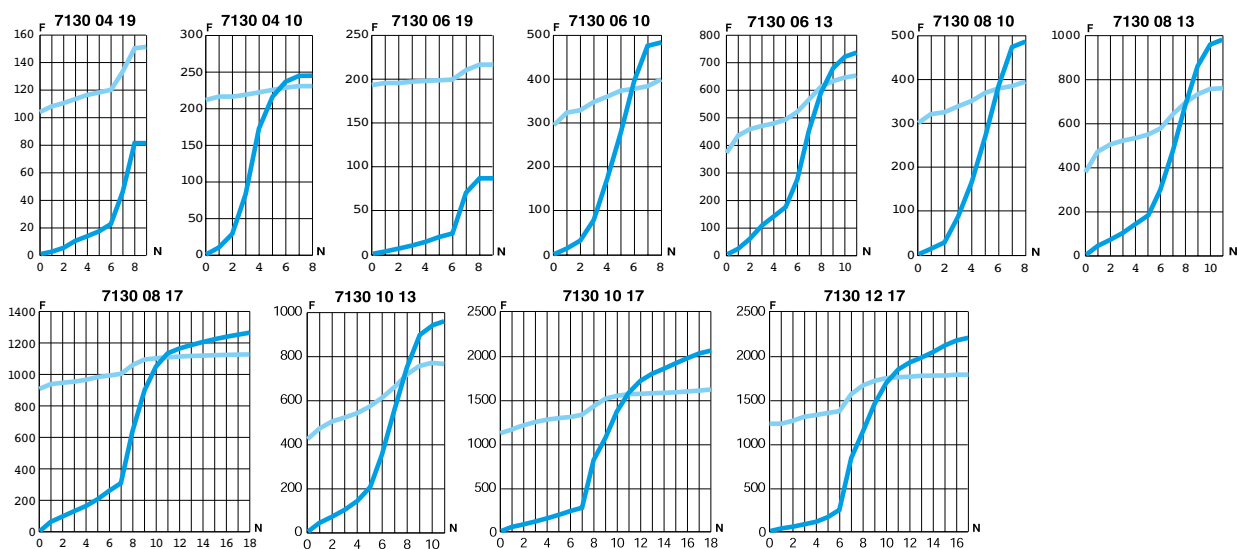

6 bar


— Direction of adjustment
— Return

F: Flow in NI/min


N: Number of turns



7140

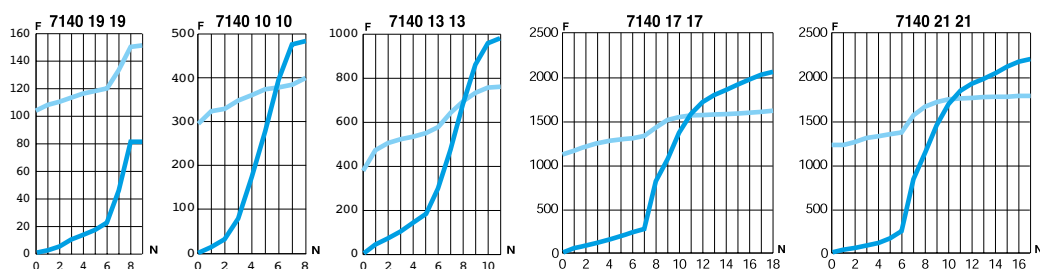


7160

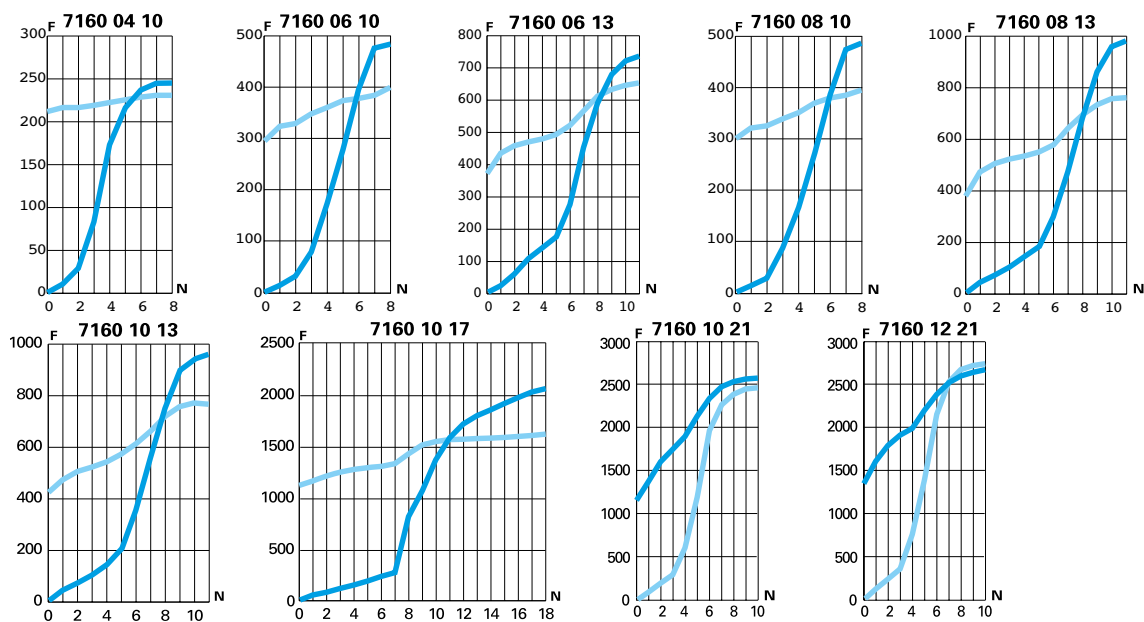




7100
7101


7100

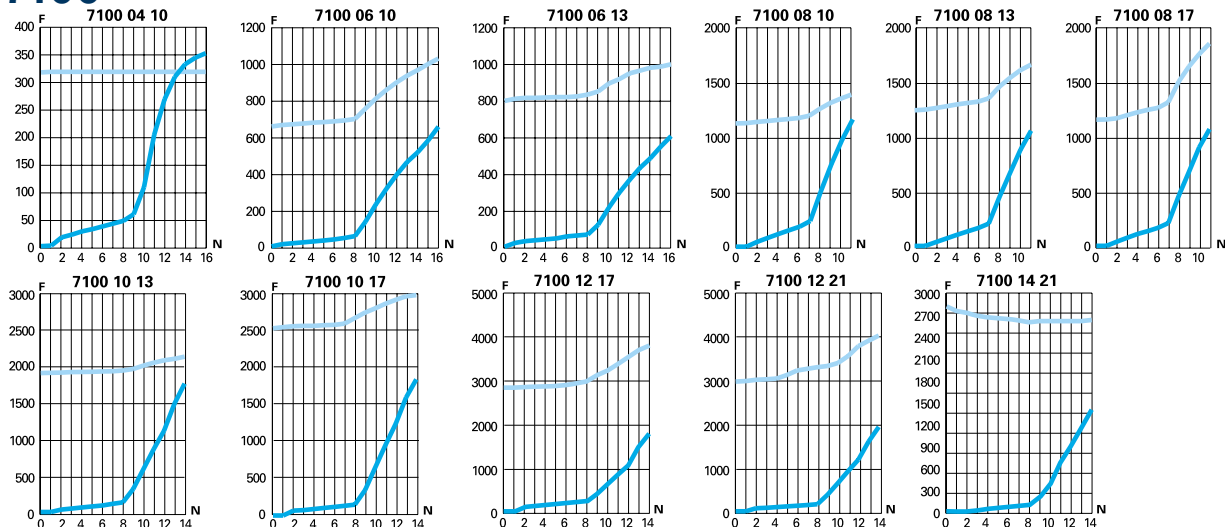

7101

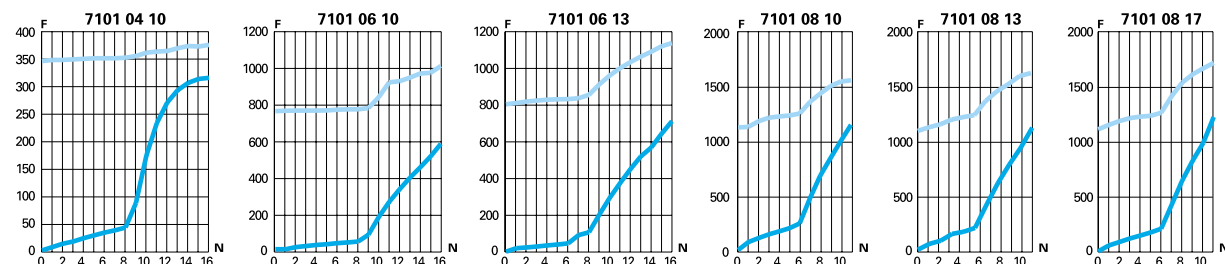

7680

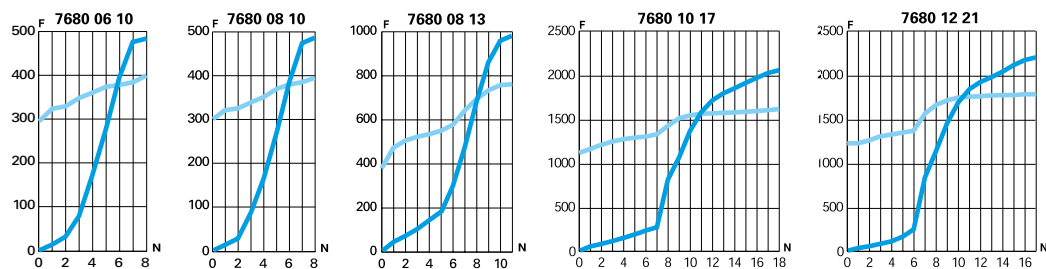

6 bar


█ Direction of adjustment
█ Return

F: Flow in NL/min

N: Number of turns




7180

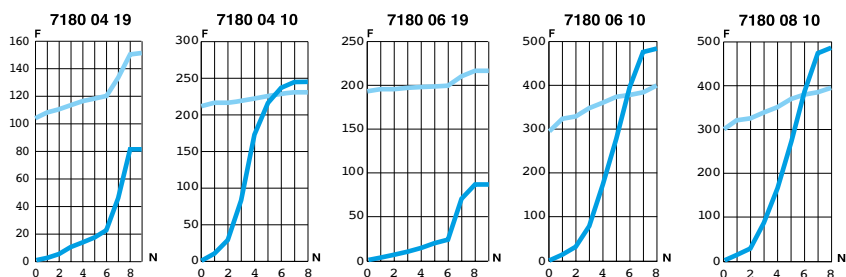


7110 7111


7110

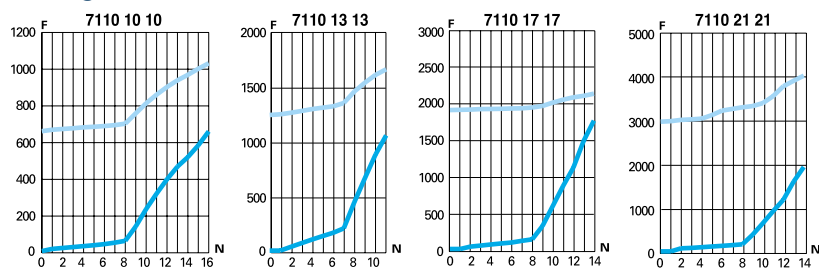


7111

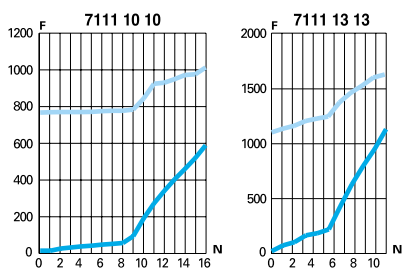

7170

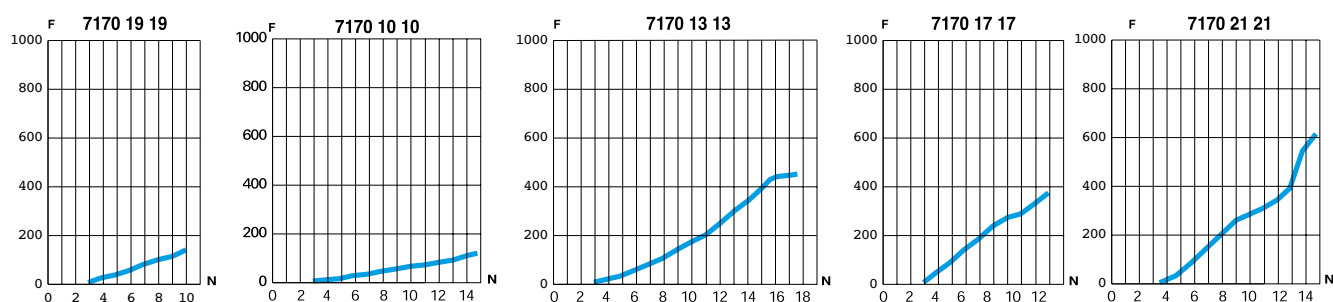



Legris metal quick-exhaust valves, available in various materials, cover a wide range of applications. They increase productivity by quickly releasing compressed air to speed up the return of the cylinder rod.

Technical specifications



Fluids: compressed air



Operating pressure: 2 to 10 bar (except 7910 from 0.7 to 10 bar)



Operating temperature: -20°C to +120°C



Connection: M5 – G1/8 to G1 and R1/8 to R1/2




Regulations: RoHS, REACH, PED

Performance depends on the fluids, materials and tube used.

Component materials

Lip seals:
7970-7971:
polyurethane elastomer
7899: G1/8 and G1/4,
FKM G3/8 to G1,
polyurethane



Body:
7970: nickel-plated brass
7971: anodised aluminium
7899: stainless steel

Integrated silencer:
stainless steel (7971)

Benefits


- Available in nickel-plated brass, treated aluminium and stainless steel, to suit all environments.
- The rapid return of the cylinder rod reduces cycle times and increases productivity.
- The treated aluminium versions are equipped with an integrated silencer to reduce noise pollution for users.

Recommended applications




Operating principle

Mounting on cylinder

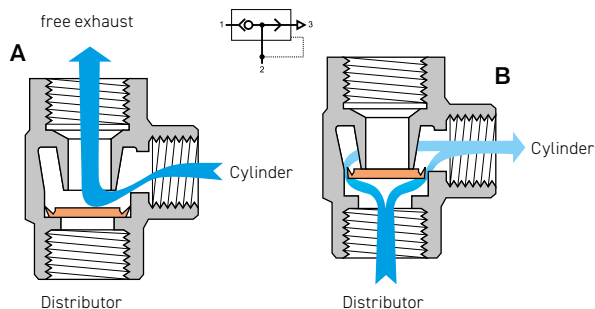

Installation guide



Maximum tightening torque (daN.m)	Threads	G1/8	G1/4	G3/8
external screw	daN.m	0.4	0.5	0.6

7970

Elbow Quick Exhaust Valve, Female BSPP and Metric Thread

Nickel-plated brass



Scan for more dimensions



C	References
M5x0.8	7970 19 19
G1/8	7970 10 10
G1/4	7970 13 13
G3/8	7970 17 17
G1/2	7970 21 21
G3/4	7970 27 27
G1	7970 34 34

7971

Straight Quick Exhaust Valve, Male BSPT/Female BSPP Thread

Treated aluminium



Scan for more dimensions



C	C1	References
G1/8	R1/8	7971 10 10
G1/4	R1/4	7971 13 13
G3/8	R3/8	7971 17 17
G1/2	R1/2	7971 21 21

Noise level:
7971 10 10: 70 dBa
7971 13 13: 70 dBa
7971 17 17: 72 dBa
7971 21 21: 88 dBa

7899

Quick Exhaust Valve, Female BSPP Thread

Stainless steel 316L



Scan for more dimensions



DN	C	References
7	G1/8	7899 00 10
	G1/4	7899 00 13
9	G3/8	7899 00 17
12	G1/2	7899 00 21
18	G3/4	7899 00 27
	G1	7899 00 34



Legris pressure regulators ensure energy savings by regulating the pressure in the chamber of a pneumatic cylinder.

Technical specifications



Fluids: compressed air



Operating pressure: Upstream pressure: 1 to 16 bar, downstream pressure: 1 to 8 bar



Operating temperature: -10°C to +70°C



Diameter: 4 to 10 mm



Connection: G1/8 to G3/8 (BSPP)



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

Body and adjustment screw: nickel-plated brass

Banjo body: polymer

Gripping ring: stainless steel

Adaptor: nickel-plated brass

Seals: NBR



Benefits

- **Precise adjustment and locking of the setpoint**, preventing any accidental misadjustment.
- **Simplified installation** thanks to a numbered mark on the screw, making it easy to set the desired pressure.
- **Can be connected in series**, allowing the appropriate supply pressure to be distributed to each piece of equipment.
- **Ideal for applications** requiring precise control of cylinder force (marking, fitting, crimping, etc.).


Recommended applications



Operating principle


Installation upstream of the distributor

Adjustment of the supply pressure in both chambers of the cylinder




Installation downstream of the distributor

Phase 1: adjustment of the supply pressure at the inlet




Phase 2: does not interfere with conventional exhaust through the distributor




User guide

Flow characteristics at 7 bar (Nl/min)


G1/8 models

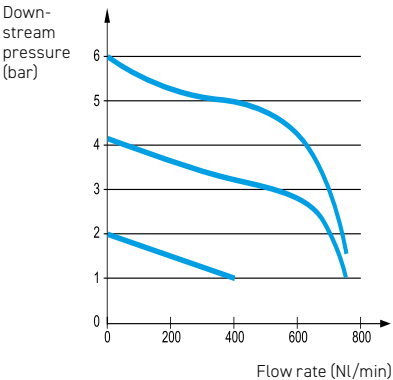

G1/4 models

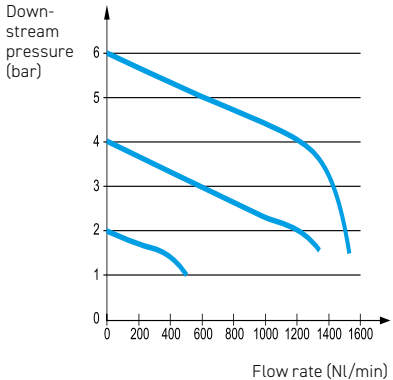

G3/8 models

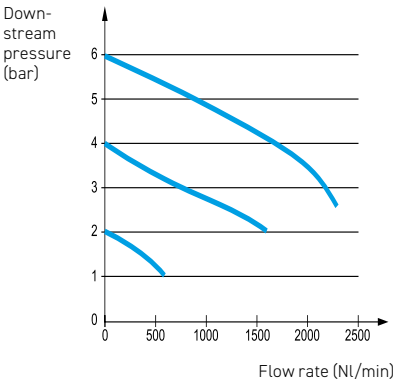

7300

Pressure Regulator, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7300 04 10
6	G1/8	7300 06 10
	G1/4	7300 06 13
8	G1/8	7300 08 10
	G1/4	7300 08 13
10	G1/4	7300 10 13




Legris pressure reducers ensure energy savings by limiting the pressure in a pneumatic system.

Technical specifications

- Fluids:** compressed air
- Operating pressure:** 1 to 15 bar
- Operating temperature:** -10°C to +80°C
- Connection:** G1/4 (BSPP)
- Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

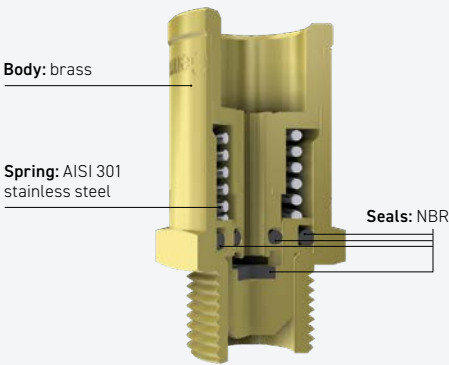

Benefits

Optimises pressure to the minimum value necessary to provide sufficient pressure while controlling energy consumption.

Recommended applications



Ensures stable and secure pressure for the air supply to a blowgun


User guide

References		Inlet pressure in bar					Maximum flow rate in l/min P1 = 15 bar
		6 bar	8 bar	10 bar	12 bar	15 bar	
DRV13/20	Output pressure in bar (tolerance ± 0.5 bar)	1.55	1.85	2.05	2.25	2.55	300
DRV13/30		2.45	2.70	2.95	3.20	3.65	360
DRV13/40		3.65	3.80	4.00	4.15	4.45	380
DRV13/50		4.45	4.65	4.85	5.05	5.35	390
DRV13/60		5.40	5.55	5.70	5.90	6.20	405
DRV13/70		-	7.50	7.60	7.70	8.00	414
DRV13/80		-	-	7.70	7.95	8.20	420
DRV13/100		-	-	-	9.90	10.15	480

DRV


Pressure Reducing Valve

Brass



Scan for more dimensions

A1	A1	References
G1/4	G1/4	DRV13/20
G1/4	G1/4	DRV13/30
G1/4	G1/4	DRV13/40
G1/4	G1/4	DRV13/50
G1/4	G1/4	DRV13/60
G1/4	G1/4	DRV13/70
G1/4	G1/4	DRV13/80




Legris snap fittings facilitate maintenance and contribute to energy savings. They enable an upstream pneumatic circuit to be vented before any work is carried out, without emptying the entire equipment.

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 0 to 10 bar
-  **Operating temperature:** -20°C to +80°C
-  **Tube diameter:** 6 to 10 mm
Nominal diameter: 5 to 7.3 mm
-  **Connection:** G1/8 to G3/8 (BSPP)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

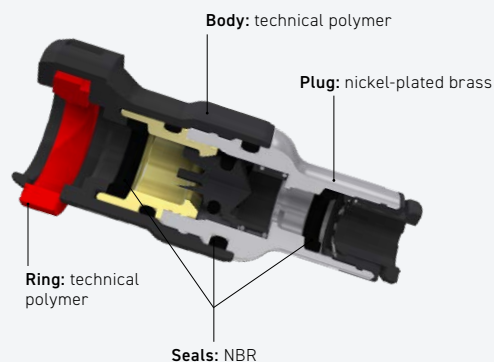

Benefits

- **Enables partial venting of the installation**, resulting in energy savings and time savings during maintenance operations.
- The absence of pressure in the circuit ensures the **safety of people working on the pneumatic installation**.
- The connection indicator, via an audible click, ensures that the plug is correctly inserted into the fitting.


Recommended applications




Facilitates maintenance operations for quick and safe interventions

Operating principle

Closed circuit

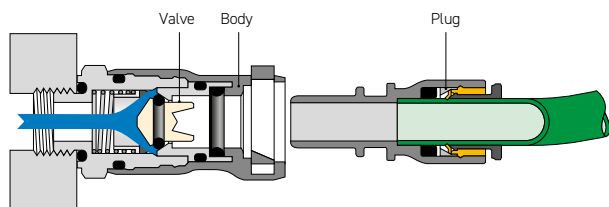

Open circuit


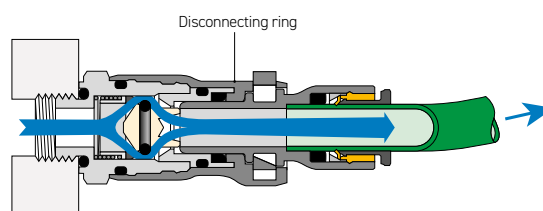


Installation guide

Maximum tight- ening torque (daN.m)	Thread		
	G1/8	G1/4	G3/8
	0.8	1.2	3

User guide

Flow characteristics - pressure drop

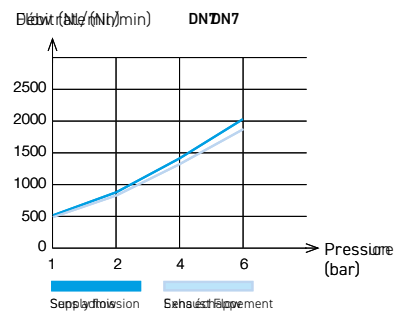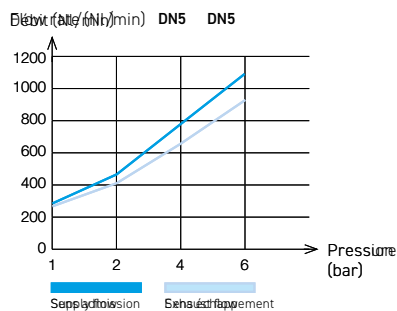

7926

Body with Push-In Connection

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



DN	ØD	References
5	6	7926 05 06
5	8	7926 05 08
7.3	10	7926 07 10

7960

Straight Probe, Push-In Connection

Technical polymer, NBR



Scan for more
dimensions



DN	ØD	References
5	6	7960 05 06
5	8	7960 05 08
7.3	10	7960 07 10

7921

Body with Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more
dimensions



DN	C	References
5	G1/8	7921 05 10
5	G1/4	7921 05 13
7.3	G3/8	7921 07 17




Legris manually-operated fittings and valves enable manual venting of a downstream pneumatic circuit, optimising intervention time and isolating a frequently operated circuit.

Technical specifications


LF 7800		Model 0669
	Fluids:	Compressed air
	Operating pressure:	0 to 10 bar
	Operating temperature:	-10°C to +80°C
	Connection:	M5 to G1/8 (BSPP)
	Regulations:	RoHS, REACH, PED

Performance depends on the fluids, materials and tube used.

Component materials

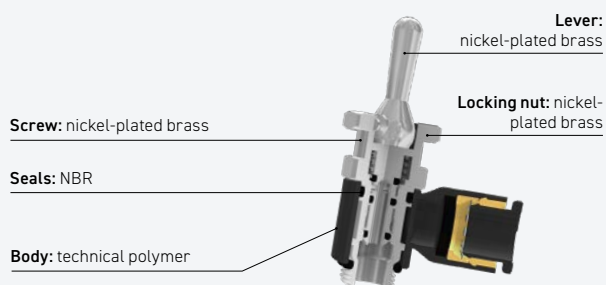

Component materials

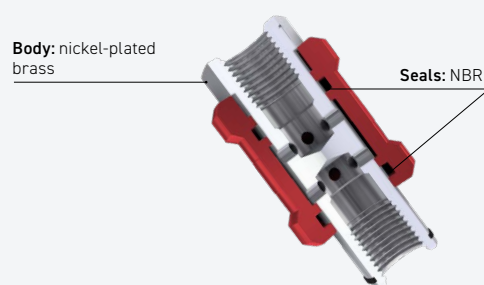

Benefits

Switch operated fitting:

- **Flexibility in installation with two models available to cover** the various configurations required:
3/2: opening, closing, venting
2/2: opening, closing.
- **The 360° orientation** makes installation easier.

Sliding sleeve valve:

- **Easy venting** by simply sliding the sleeve.
- **Optimised in-line configuration** for easy integration into machines.

Recommended applications




Operating principle

Switch operated fittings




Open

Closed

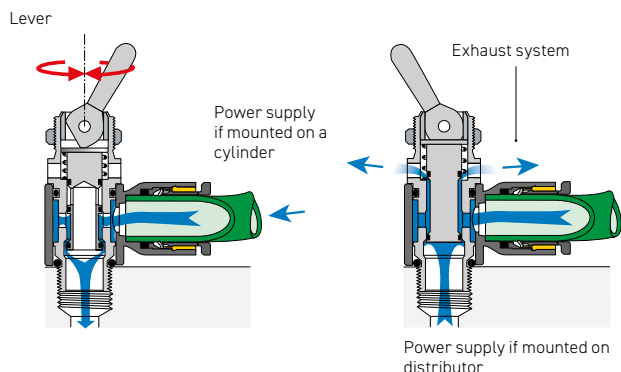


Sleeve valves



Open: downstream supply

Closed: downstream supply

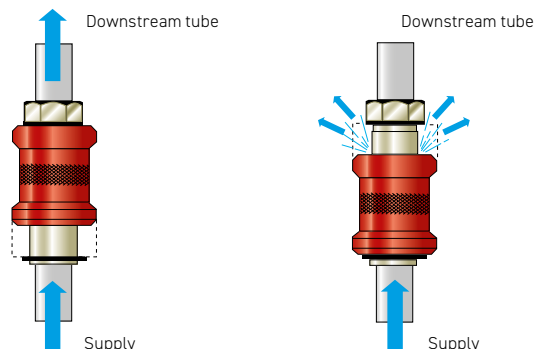

7800

3/2 Manual Switch-Operated Valve, Supply, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7800 04 19
	G1/8	7800 04 10
6	M5x0.8	7800 06 19
	G1/8	7800 06 10
8	G1/4	7800 06 13
	G1/8	7800 08 10
8	G1/4	7800 08 13

For part numbers 7800 04 19 and 7800 06 19, the seal under the base is provided by a PTFE flat gasket, and the assembly tightening torque is 0.16 daN·m maximum.

7801

3/2 Manual Switch-Operated Valve, Control, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7801 04 10
6	G1/8	7801 06 10
	G1/4	7801 06 13
8	G1/8	7801 08 10

7802

2/2 Manual Switch-Operated Valve, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7802 04 10
6	G1/8	7802 06 10
	G1/4	7802 06 13
8	G1/8	7802 08 10
	G1/4	7802 08 13

0669

3/2 Sleeve Valve, Female BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
2.5	M5x0.8	0669 02 19
4	G1/8	0669 04 10
7	G1/4	0669 07 13
10	G3/8	0669 10 17
14	G1/2	0669 14 21
19	G3/4	0669 19 27




Legris sensor fittings ensure the safety of installations. They emit a pneumatic or electrical signal as soon as the pressure in the cylinder's exhaust chamber falls below its control threshold.

Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 3 to 8 bar
(Back pressure 0.85 bar to 1 bar)
-  **Operating temperature:** -15°C to +60°C
-  **Tube diameter:** 4 mm
-  **Connection:** M5 to G1/2 (BSPP)
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.


Component materials

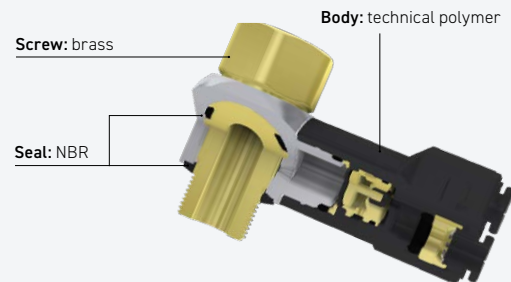

Benefits


- **Optimal installation safety** by automating the transmission of a pneumatic or electrical signal as soon as the back pressure threshold is reached.
- The absence of adjustments allows a **quick and efficient installation**.

Recommended applications

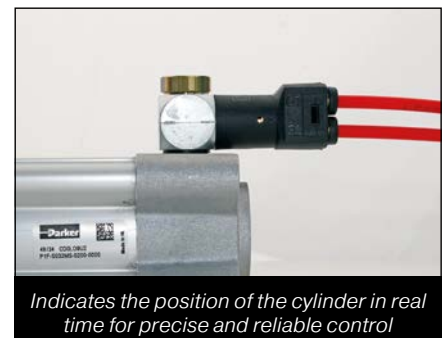


Operating principle


Cylinder in operation

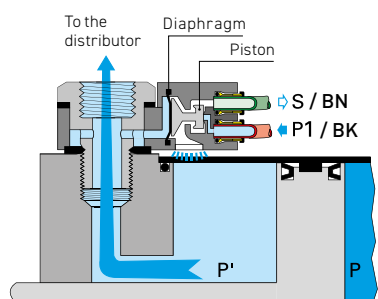

Cylinder in final position

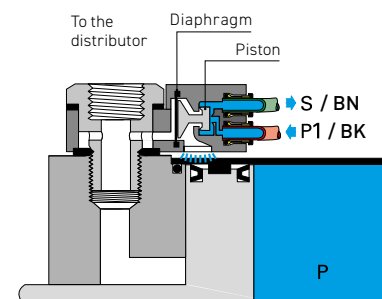


Cylinder pressure cycle

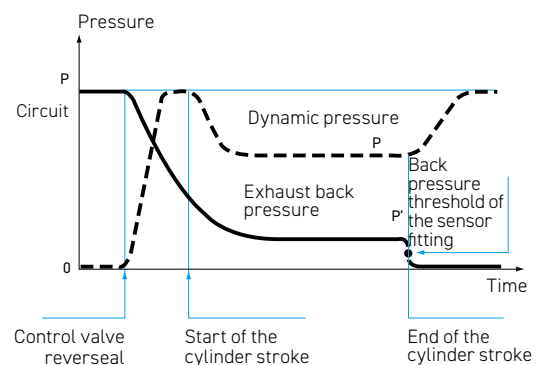


Installation guide

Pneumatic assembly diagram



Electrical wiring diagram




The connection is made using three 0.5 mm² cables, each 2 m long.
Contactor: 5A/250 V ~ or 5W/48V ===

Layout diagram

Depending on the model, S1, S2 and P1 can be pneumatic or electric.
See assembly diagrams opposite.

P1: Pilot signal
P: Dynamic pressure
P': Exhaust back pressure

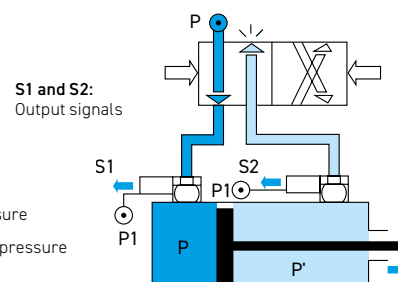

User guide

PNEUMATIC OUTPUT

- 2 exclusively pneumatic assemblies possible:
- Permanently pressurised (P1): guarantees a pneumatic signal when the back pressure threshold is reached;
 - Supplied from the distributor-cylinder line on the opposite side: no unexpected pneumatic signal (S) can appear when pressurising thanks to the driving pressure that powers the sensor connection (P1).

Switching time

Model 7818: 3 ms

WITH ELECTRICAL OUTPUT

Combined electrical and pneumatic assembly.
Installation with continuous electrical supply only (BU).
Ensures an electrical signal when the back pressure threshold pressure is reached.

Open/closed contact

Model 7828:
2A/0-48 V
2A/250 V 50 Hz

7818

Pneumatic Sensor Fitting, Male
BSPP and Metric Thread

Zamak, technical polymer, brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7818 04 19*
	G1/8	7818 04 10
	G1/4	7818 04 13
	G3/8	7818 04 17
	G1/2	7818 04 21

* Bolt zinc passivated steel

7828

Pneumatic/Electric Sensor, Male/
Female BSPP and Metric Thread

Technical polymer, brass, NBR



Scan for more dimensions



C	References
M5x0.8	7828 00 19
G1/8	7828 00 10
G1/4	7828 00 13
G3/8	7828 00 17

7818

Pneumatic Sensor, Male/Female
BSPP Thread

Zamak, technical polymer, brass, NBR



Scan for more dimensions



C	References
G1/8	7818 19 10
G1/4	7818 19 13



Available in various materials, Legris silencers reduce noise levels, thereby improving user comfort in a wide range of applications.

Technical specifications


	Technical polymer	Sintered bronze	Brass	Nickel-plated brass	Stainless steel 316L
Fluids:			Compressed air		
Operating pressure:	0 to 10 bar	0 to 12 bar	0 to 12 bar	0 to 12 bar	0 to 12 bar
Operating temperature:	-10°C to +80°C	-20°C to +150°C	-20°C to +150°C	-20°C to +150°C	-20°C to +180°C
Connection:	M5 to 1"	G1/8 to 1"	M5 to 1"	4 to 12mm	G1/8 to 1" (BSPP) NPT1/8 to 1/2
Regulations:			RoHS, REACH, PED		

Performance depends on the fluid, material and tube used.

Component materials

Body:
brass (0670-0673-0675-0671-0677-0672)
polymer (0674-0676)
stainless steel (0682-0683)

Silencers:
sintered bronze (0670-0673-0675-0671-0677-0672)
polymer (0674-0676)
316L stainless steel (0682-0683)



Benefits

- **Different materials suitable for numerous applications:**
technical polymer for standard environments
sintered bronze and brass for applications requiring increased strength
stainless steel for aggressive and corrosive environments
- **silencer with integrated flow regulator (0672 and 0676)**
offering a cost-effective solution while reducing space requirements
- **compact models (0673, 0677, 0682, 0683)** for installations requiring minimal space

Recommended applications



User guide

Flow rates and noise levels of Legris silencers

0672	Number of turns						Sound level in dBA at 6 bar at 350 NI/min
	0	1	2	3	4	5	
0672 00 10	0	200	600	740	-	-	81
0672 00 13	0	300	650	1280	-	-	82
0672 00 17	0	450	950	1300	1500	-	83
0672 00 21	0	830	1430	1800	2100	2220	83

0676	Number of turns										Sound level in dBA at 6 bar at 350 NI/min
	0	1	2	3	4	5	6	7	8	9	
0676 00 10	0	30	90	210	335	370	390	390	395	395	82
0676 00 13	0	22	25	50	340	750	940	980	1000	1025	84
0676 00 17	0	518	1147	1716	2153	2571	2823	2930	-	-	85
0676 00 21		814	1849	2880	4087	5044	5236	-	-	-	86

0670	Sound level in dBA at 6 bar
0670 00 10	80
0670 00 13	79
0670 00 17	83
0670 00 21	85
0670 00 27	95
0670 00 34	95

0673	Sound level in dBA at 6 bar
0673 00 10	73
0673 00 13	74
0673 00 17	85
0673 00 19	87
0673 00 21	89

0674	Sound level in dBA at 6 bar
0674 00 19	73
0674 00 10	78
0674 00 13	81
0674 00 17	87
0674 00 21	83
0674 00 27	79
0674 00 34	88

0675	Sound level in dBA at 6 bar
0675 00 10	70
0675 00 13	67
0675 00 17	77
0675 00 19	78
0675 00 21	80

0677	Sound level in dBA at 6 bar
0677 00 10	72
0677 00 13	73
0677 00 17	84
0677 00 21	88
0677 00 27	88
0677 00 34	89

0682	Sound level in dBA at 6 bar
0682 00 10	73
0682 00 13	74
0682 00 17	86
0682 00 21	80
0682 00 27	88
0682 00 34	89

0683	Sound level in dBA at 6 bar
0683 00 11	73
0683 00 14	74
0683 00 18	86
0683 00 22	80

0674

Polymer Silencer, Male BSPP and Metric Thread

Technical polymer



Scan for more dimensions



C	References
M5x0.8	0674 00 19
G1/8	0674 00 10
G1/4	0674 00 13
G3/8	0674 00 17
G1/2	0674 00 21
G3/4	0674 00 27
G1	0674 00 34

0676

Flow Control Polymer Silencer, Male BSPP and Metric Thread

Technical polymer



Scan for more dimensions



C	References
G1/8	0676 00 10
G1/4	0676 00 13
G3/8	0676 00 17
G1/2	0676 00 21

0672

Flow Control Silencer, Male BSPP Thread

Sintered bronze, brass



Scan for more dimensions



C	References
G1/8	0672 00 10
G1/4	0672 00 13
G3/8	0672 00 17
G1/2	0672 00 21

0670

Threaded Silencer, Male BSPP Thread

Sintered bronze, brass



Scan for more dimensions



C	References
G1/8	0670 00 10
G1/4	0670 00 13
G3/8	0670 00 17
G1/2	0670 00 21
G3/4	0670 00 27
G1	0670 00 34

0675

Threaded Silencer, Male BSPP and Metric Thread

Brass



Scan for more dimensions



C	References
M5x0.8	0675 00 19
M7x1	0675 00 55
G1/8	0675 00 10
G1/4	0675 00 13
G3/8	0675 00 17
G1/2	0675 00 21

0671

Plug-In Silencer

Nickel-plated brass



Scan for more dimensions



ØD	References
4	0671 04 00
6	0671 06 00
8	0671 08 00
10	0671 10 00
12	0671 12 00

0673

Compact Silencer, Male BSPP and Metric Thread

Brass



Scan for more dimensions



C	References
M5x0.8	0673 00 19
G1/8	0673 00 10
G1/4	0673 00 13
G3/8	0673 00 17
G1/2	0673 00 21

0677

Miniature Silencer, Male BSPP Thread

Brass



Scan for more dimensions



C	References
G1/8	0677 00 10
G1/4	0677 00 13
G3/8	0677 00 17
G1/2	0677 00 21
G3/4	0677 00 27
G1	0677 00 34

0682

Compact Silencer, Male BSPP Thread

Stainless steel 316L



Scan for more dimensions



C	References
G1/8	0682 00 10
G1/4	0682 00 13
G3/8	0682 00 17
G1/2	0682 00 21
G3/4	0682 00 27
G1	0682 00 34

0683

Compact Silencer, Male NPT Thread


Stainless steel 316L



Scan for more dimensions



C	References
NPT1/8	0683 00 11
NPT1/4	0683 00 14
NPT3/8	0683 00 18
NPT1/2	0683 00 22

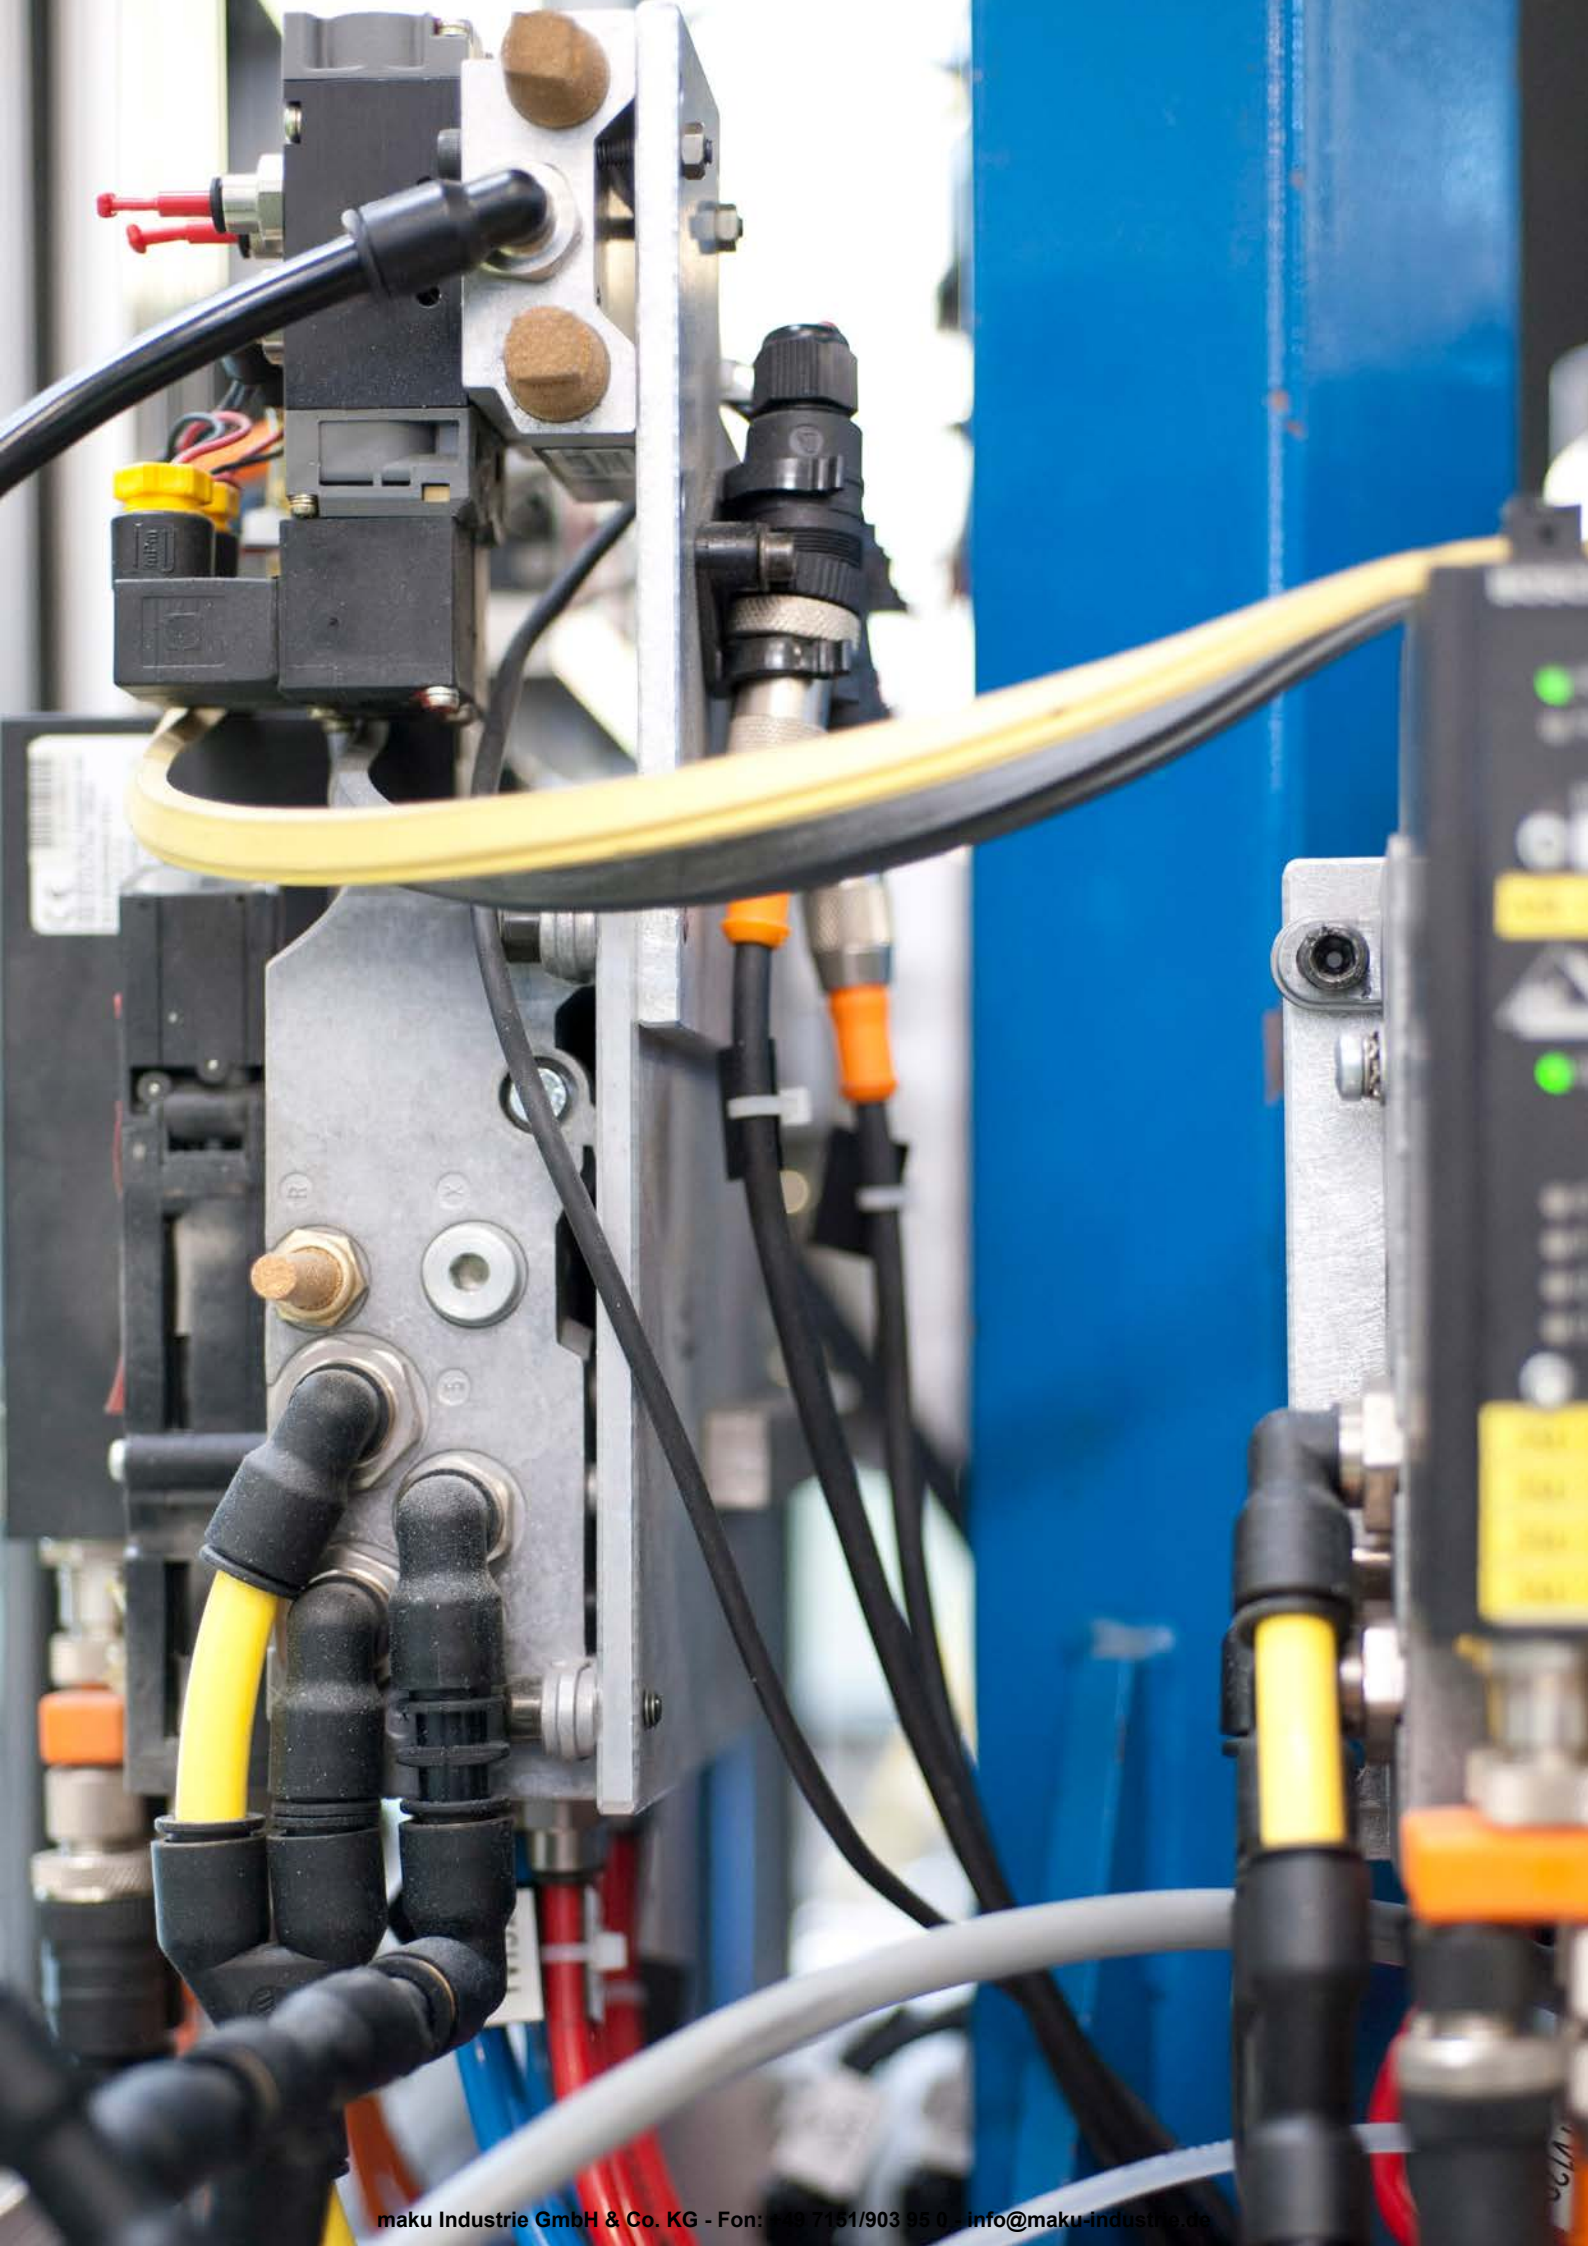

03

UNIVERSAL FITTINGS

Legris compression fittings offer a universal connection solution. They are compatible with metal tubes and available in multiple materials, diameters, and configurations.

RELIABLE WATERPROOFING

Featuring a metal seal, these fittings eliminate the risk of incompatibility between the seal and the fluid, ensuring safe and efficient operation.

EXCEPTIONAL DURABILITY

Developed for long-lasting performance, Legris compression fittings are remarkably robust, enabling them to withstand high pressures and mechanical stresses in demanding environments.



LEGRIS
COMPRESSION
FITTINGS

PRODUCTS OFFER

COMPRESSION FITTINGS LEGRIS	Fluids	Materials	Maximum operating pressure (bar)	Temperature		PAGE
				Min.	Max.	
Brass compression fittings 	 Compressed air, industrial water	Brass	550	-60°C	+250°C	102
Stainless steel compression fittings 	 Compressed air, treated water	Stainless steel 316L	400	-60°C	+250°C	112

HOW TO CHOOSE YOUR COMPRESSION FITTING?

The choice depends mainly on your working environment and the tube to be connected.

Brass compression fittings are designed for standard environments with the following metal tubes:

- **Copper tube:** cold-drawn hardened copper in straight bars or annealed copper tube in coils.
- **Steel circuit tube:** cold-drawn, seamless, white-annealed, straight-bar "thin" tube.

External diameter from 6 to 16 mm (maximum thickness 1 mm)

External diameter > 16 mm (maximum thickness 1.5 mm)

Stainless steel compression fittings are ideal for use in aggressive environments with stainless steel tubes:

- **Thin, straight, cold-drawn, seamless, hyper-hardened, pickled and passivated tube.**

External diameter from 6 to 16 mm (maximum thickness 1 mm ± 0.1 mm);

- **Annealed tube in coils:** reduce the operating pressure by 35%.

In environments with strong vibrations, we recommend using our compression fittings only with straight metal tubes.

What type of fluid do you wish to convey?



Parker offers ranges dedicated to **compressed air and neutral gases**.




Parker presents ranges specifically designed for **water**, including:

- *Industrial water (tap water),*
- *Treated water (deionised, pure and demineralised)*

Vocabulary related to compression fittings

Compression fittings consist of three main components:

- a compression nut (1),
- a compression ring, also known as an olive (2),
- a body containing the compression seat located inside (3).

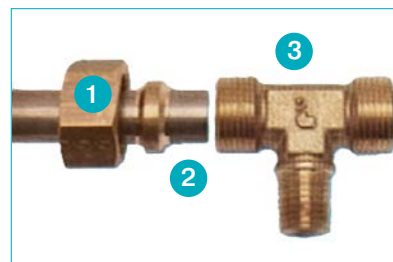

INSTALLATION GUIDE

Each Legris compression fitting is supplied with three components: body, olive and compression nut. Individual components are also available if required. It is recommended to use a new compression olive for each new installation to ensure optimal performance and reliable sealing. The rest of the assembly can be reused after the initial installation.


Installation

1- Preparing the tube




Cut the metal tube square with the appropriate tool. Deburr the inner and outer edges. When bending the tube is necessary, do so before connecting it.

2- Preparing the connection



Slide the nut onto the tube, lubricate the body thread, the olive and the nut thread to facilitate tightening, then fit the olive onto the end of the tube.



Place the tube against the shoulder of the fitting body and pre-tighten by hand.

3- Final assembly



Screw the nut onto the spanner to crimp the ring onto the tube; the connection is complete when the recommended tightening torque is reached.

Compression fitting identification codes

0101 06 10 39

Item type

01XX: Brass

E.g.

0110: nut

0111 and 0124: olive

0122: sleeve for rubber hose

0165: barb connector for flexible tube

0166: reduction

18XX: stainless steel

E.g.

1810: nut

1820: adapter

1824: olive

1866: reduction

Nominal diameter

04 = 4 mm

06 = 6 mm

...

20 = 20 mm

28 = 28 mm

Thread code

1/8 = 10

1/4 = 13

3/8 = 17

1/2 = 21


3/4 = 27

Suffix

39: bonded seal

40: treated steel

60: extended nut

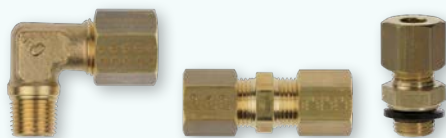

An alternative to push-in fittings, Legris brass compression fittings offer a robust and reliable solution. Their proven metallic sealing performance with a variety of tubes can withstand significant pressure and mechanical stress.

Technical specifications



Fluids: compressed air, industrial water



Operating pressure: 10⁻² millibar to 550 bar



Operating temperature:

-60°C to +250°C without sealing ring, with metal tube
-20°C with polyamide sealing ring




Diameter: 4 to 28 mm



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

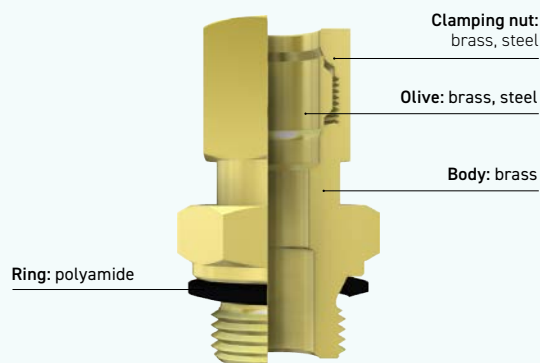

Benefits

- **Metal sealing** for optimum service life, pressure and temperature ranges.
- **Robust design** to withstand vibrations and shocks in demanding environments.

Installation guide


Maximum nominal diameters

The table below shows the maximum nominal diameter based on the installation threads for a few examples of tube diameters.

Tube O.D.	BSPP thread	Max. nominal
4-5-6	G1/8	4
6-8-10	G1/4	7
10-12-14	G3/8	11
14-15-16-18	G1/2	14
18-20-22	G3/4	18
22-25-28	G1	24

Tube lengths for assembly

ØD	L (mm)	ØD	L (mm)	ØD	L (mm)
4	26.5	12	39	20	51
5	26	14	41	22	54
6	26	15	41	25	62
8	32	16	46.5	28	62
10	39	18	49.5		




Minimum length of tube (L) between 2 fittings.

Recommended applications



High temperature resistance in the glass industry

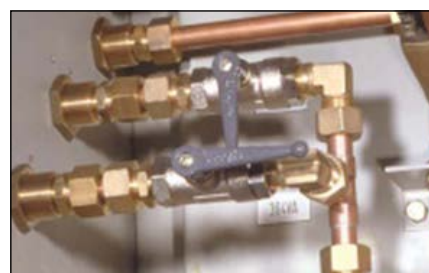

Modular assembly with copper tubing in a confined environment


Component selection principle

Body	Brass body					
Nut	0110 Brass		0110..60 Brass		0110..40 Steel	
Olive	No olive required	0124 brass	0111 brass BNA standard*	0124 brass	0111 brass BNA standard*	0124 ... 40 steel
Tube	Plug 0126	Brass tubes, copper, steel, or sockets 0122 and 0165	Copper tubes in coils	Copper tubes	Copper tubes in coils	Steel tube or copper tube
Environment	Standard			Subjected to abnormal lateral impacts		Low and medium pressure hydraulic system. Lubrication required before assembly

* BNA: Bureau de Normalisation Automobile (Automotive Standardisation Office)

Recommended nut tightening torque

Tightening torque in daN.m = maximum tightening torque for a 0110 nut and a 0124 olive on copper or brass tube and on steel tube.

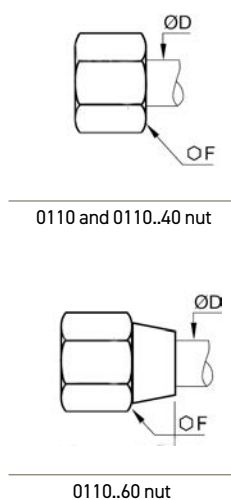

Ø D tube (mm)	F Size of nut 0110	F Size of nut 0110.. 60	Maximum tightening torque on copper or brass tube in daN.m	F Size of nut 0110 .. 40	Maximum tightening torque on steel tube in daN.m
4	10	11	0.7	10	1.5
5	12	13	0.7	12	1.5
6	13	13	1.5	13	2.5
8	14	16	1.5	14	2.5
10	19	20	1.8	19	3
12	22	22	3	22	4.5
14	24	24	3.5	24	5.5
15	24	24	4	24	6
16	27	27	5	27	7
18	30	30	6	30	9
20	32	32	6	32	10
22	36	36	7	36	12
25	41	41	8	41	13
28	42		9		



Recommended configurations for tube-fitting assembly

Type of tube	Copper tube "worked" cold drawn and in straight lengths			Steel circuit tube: "thin wall" cold drawn, seamless, bright annealed and in straight lengths	
Type of assembly	Assembly made with brass olive and brass nut			Assembly made with universal ring Legris treated steel and universal nut treated steel (series with suffix 40)	
Common name for the tube	Tube dimensions		Maximum operating pressure of the connection (bar)	Maximum regular operating pressure (bar)	Operating pressure with water hammer (bar)
	Ø ext.	thick.			
2 x 4	4	1	230	550	460
3 x 5	5	1	190	470	370
4 x 6	6	1	150	400	290
6 x 8	8	1	100	310	225
8 x 10	10	1	75	240	185
10 x 12	12	1	55	200	145
12 x 14	14	1	45	160	125
13 x 15	15	1	42	150	115
14 x 16	16	1	40	140	110
16 x 18	18	1	37	120	85
15.6 x 18	18	1.2	55	-	-
18 x 20	20	1	35	100	70
17.6 x 20	20	1.2	50	-	-
20 x 22	22	1	30	90	60
18.8 x 22	22	1.6	60	-	-
23 x 25	25	1	20	70	40
21.8 x 25	25	1.6	55	-	-
26 x 28	28	1	25	-	-
24.8 x 28	28	1.6	40	-	-
24 x 28	28	2	50	-	-

Legris brass compression fittings are not compatible with ammonia and its derivatives. The above recommendations are given in good faith. However, as each application is different, it is advisable to carry out tests under real conditions of use.

0105

Stud Fitting, Male BSPT Thread

Brass



Scan for more dimensions



ØD	C	References
4	R1/8	0105 04 10
5	R1/8	0105 05 10
	R1/4	0105 05 13
6	R1/8	0105 06 10
	R1/4	0105 06 13
	R3/8	0105 06 17
8	R1/8	0105 08 10
	R1/4	0105 08 13
	R3/8	0105 08 17
	R1/8	0105 10 10
10	R1/4	0105 10 13
	R3/8	0105 10 17
	R1/2	0105 10 21
	R1/4	0105 12 13
12	R3/8	0105 12 17
	R1/2	0105 12 21
	R1/4	0105 14 13
14	R3/8	0105 14 17
	R1/2	0105 14 21
	R3/4	0105 14 27
15	R3/8	0105 15 17
	R1/2	0105 15 21
	R1/4	0105 16 13
16	R3/8	0105 16 17
	R1/2	0105 16 21
	R3/4	0105 16 27
18	R1/2	0105 18 21
	R3/4	0105 18 27
20	R1/2	0105 20 21
	R3/4	0105 20 27
	R1/2	0105 22 21
22	R3/4	0105 22 27
	R1	0105 22 34
25	R3/4	0105 25 27
	R1	0105 25 34
28	R1	0105 28 34

Fittings with tapered metric or NPT threads are available on special order, when quantities justify it.

0105

Stud Fitting, Male NPT Thread

Brass



Scan for more dimensions



ØD	C	References
6	NPT1/8	0105 06 11
	NPT1/4	0105 06 14
8	NPT1/8	0105 08 11
	NPT1/4	0105 08 14
	NPT1/4	0105 10 14
10	NPT3/8	0105 10 18
	NPT1/2	0105 10 22

0101

Stud Fitting with Captive Sealing Washer, Male BSPP and Metric Thread

Brass, technical polymer



Scan for more dimensions



ØD	C	References
4	M5x0.8	0101 04 19
	G1/8	0101 04 10
5	G1/8	0101 05 10
6	G1/8	0101 06 10
	G1/4	0101 06 13
	G1/8	0101 08 10
8	G1/4	0101 08 13
	G3/8	0101 08 17
10	G1/4	0101 10 13
	G3/8	0101 10 17
	G1/4	0101 12 13
12	G3/8	0101 12 17
	G1/2	0101 12 21
	G3/8	0101 14 17
14	G1/2	0101 14 21
	G3/8	0101 15 17
15	G1/2	0101 15 21
	G3/8	0101 16 17
16	G1/2	0101 16 21
	G1/2	0101 18 21
18	G3/4	0101 18 27
20	G3/4	0101 20 27
	G3/4	0101 22 27
22	G1	0101 22 34
28	G1	0101 28 34

Threaded connection with a bonded seal washer. 0602 bonded seal washers can be found in the "Connection accessories" section.

0101..39

Stud Fitting, with Bi-Material Seal, Male BSPP Thread

Brass, zinc plated steel with NBR seal



Scan for more dimensions



ØD	C	References
4	G1/8	0101 04 10 39
5	G1/8	0101 05 10 39
6	G1/8	0101 06 10 39
	G1/4	0101 06 13 39
	G1/8	0101 08 10 39
8	G1/4	0101 08 13 39
	G3/8	0101 08 17 39
10	G1/4	0101 10 13 39
	G3/8	0101 10 17 39
	G1/4	0101 12 13 39
12	G3/8	0101 12 17 39
	G1/2	0101 12 21 39
14	G3/8	0101 14 17 39
	G1/2	0101 14 21 39
15	G3/8	0101 15 17 39
	G1/2	0101 15 21 39
16	G3/8	0101 16 17 39
	G1/2	0101 16 21 39
18	G1/2	0101 18 21 39
	G3/4	0101 18 27 39
20	G3/4	0101 20 27 39
	G3/4	0101 22 27 39
22	G1	0101 22 34 39
28	G1	0101 28 34 39

Threaded connection with a two-material bonded seal washer. 0139 bonded seal washers can be found in the "Connection accessories" section.

0101

Stud Fitting, Male Metric Thread

Brass



Scan for more dimensions



ØD	C	References
4	M7x1	0101 04 55
	M8x1	0101 04 56
5	M8x1	0101 05 56
	M10x1	0101 05 60
6	M10x1	0101 06 60
	M10x1.5	0101 06 62
	M12x1	0101 08 65
8	M12x1.25	0101 08 66
	M13x1.25	0101 08 68
	M14x1.25	0101 10 70
	M14x1.5	0101 10 71
10	M16x1.25	0101 10 74
	M16x1.5	0101 10 75
	M18x1.5	0101 10 78
12	M16x1.5	0101 12 75
	M18x1.5	0101 12 78
14	M20x1.5	0101 14 80
16	M20x1.5	0101 16 80
	M22x1.5	0101 16 82
18	M22x1.5	0101 18 82

0114

Stud Fitting, Female BSPP Thread



Brass

Scan for more dimensions



ØD	C	References
4	G1/8	0114 04 10
	G1/4	0114 04 13
5	G1/8	0114 05 10
	G1/4	0114 05 13
6	G1/8	0114 06 10
	G1/4	0114 06 13
	G3/8	0114 06 17
8	G1/8	0114 08 10
	G1/4	0114 08 13
	G3/8	0114 08 17
10	G1/4	0114 10 13
	G3/8	0114 10 17
	G1/2	0114 10 21
12	G1/4	0114 12 13
	G3/8	0114 12 17
	G1/2	0114 12 21
14	G1/4	0114 14 13
	G3/8	0114 14 17
	G1/2	0114 14 21
15	G3/8	0114 15 17
	G1/2	0114 15 21
16	G3/8	0114 16 17
	G1/2	0114 16 21
18	G1/2	0114 18 21
	G3/4	0114 18 27
20	G1/2	0114 20 21
22	G3/4	0114 22 27

0199

Stud Orientable Elbow, Male BSPP Thread

Brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	0199 04 10
	G1/4	0199 04 13
6	G1/8	0199 06 10
	G1/4	0199 06 13
8	G1/8	0199 08 10
	G1/4	0199 08 13
	G3/8	0199 08 17
10	G1/4	0199 10 13
	G3/8	0199 10 17
	G1/2	0199 10 21
14	G3/8	0199 14 17
	G1/2	0199 14 21
18	G1/2	0199 18 21
	G3/4	0199 18 27
22	G3/4	0199 22 27
	G1	0199 22 34

Swivel fitting

0109

Stud Elbow, Male BSPT Thread



Brass

Scan for more dimensions



ØD	C	References
4	R1/8	0109 04 10
	R1/4	0109 04 13
5	R1/8	0109 05 10
	R1/4	0109 05 13
6	R1/8	0109 06 10
	R1/4	0109 06 13
	R1/8	0109 08 10
8	R1/4	0109 08 13
	R3/8	0109 08 17
	R1/4	0109 10 13
10	R3/8	0109 10 17
	R1/2	0109 10 21
	R1/4	0109 12 13
12	R3/8	0109 12 17
	R1/2	0109 12 21
14	R3/8	0109 14 17
	R1/2	0109 14 21
15	R3/8	0109 15 17
	R1/2	0109 15 21
16	R3/8	0109 16 17
	R1/2	0109 16 21
18	R3/4	0109 18 21
	R3/4	0109 18 27
20	R1/2	0109 20 21
	R3/4	0109 20 27
22	R3/4	0109 22 27
	R1	0109 22 34
25	R1	0109 25 34
28	R1	0109 28 34

Fittings with tapered metric or NPT threads are available on special order, when quantities justify it.

0103

Stud Run Tee, Male BSPT Thread

Brass



Scan for more dimensions



ØD	C	References
4	R1/8	0103 04 10
	R1/8	0103 06 10
6	R1/4	0103 06 13
	R1/4	0103 08 13
10	R1/4	0103 10 13
12	R1/4	0103 12 13

Fittings with tapered metric or NPT threads are available on special order, when quantities justify it.

0109

Stud Elbow, Male NPT Thread



Brass

Scan for more dimensions



ØD	C	References
6	NPT1/8	0109 06 11
	NPT1/4	0109 06 14
8	NPT1/8	0109 08 11
	NPT1/4	0109 08 14
10	NPT1/4	0109 10 14

0102

Equal Elbow

Brass



Scan for more dimensions



ØD	References
4	0102 04 00
5	0102 05 00
6	0102 06 00
8	0102 08 00
10	0102 10 00
12	0102 12 00
14	0102 14 00
15	0102 15 00
16	0102 16 00
18	0102 18 00
20	0102 20 00
22	0102 22 00
28	0102 28 00

0108

Stud Branch Tee, Male BSPT Thread



Brass

Scan for more dimensions



ØD	C	References
4	R1/8	0108 04 10
6	R1/8	0108 06 10
	R1/4	0108 06 13
8	R1/8	0108 08 10
	R1/4	0108 08 13
	R3/8	0108 08 17
10	R1/4	0108 10 13
	R3/8	0108 10 17
12	R1/4	0108 12 13
	R3/8	0108 12 17
14	R1/2	0108 14 21
16	R1/2	0108 16 21
18	R1/2	0108 18 21
20	R3/4	0108 20 27
22	R3/4	0108 22 27

Fittings with tapered metric or NPT threads are available on special order, when quantities justify it.

0104

Equal Tee



Brass

Scan for more dimensions



ØD	References
4	0104 04 00
5	0104 05 00
6	0104 06 00
8	0104 08 00
10	0104 10 00
12	0104 12 00
14	0104 14 00
15	0104 15 00
16	0104 16 00
18	0104 18 00
20	0104 20 00
22	0104 22 00

0106

Equal Tube-to-Tube Connector



Brass

Scan for more dimensions



ØD	References
4	0106 04 00
5	0106 05 00
6	0106 06 00
8	0106 08 00
10	0106 10 00
12	0106 12 00
14	0106 14 00
15	0106 15 00
16	0106 16 00
18	0106 18 00
20	0106 20 00
22	0106 22 00
28	0106 28 00

0116

Equal Bulkhead Connector



Brass

Scan for more dimensions



ØD	References
4	0116 04 00
5	0116 05 00
6	0116 06 00
8	0116 08 00
10	0116 10 00
12	0116 12 00
14	0116 14 00
15	0116 15 00
16	0116 16 00
18	0116 18 00
20	0116 20 00
22	0116 22 00

0118..39

Single Banjo with Bi-Material Seal, Male BSPP Thread

Brass, zinc plated steel with NBR seal



Scan for more dimensions



ØD	C	References
4	G1/8	0118 04 10 39
5	G1/8	0118 05 10 39
6	G1/8	0118 06 10 39
	G1/4	0118 06 13 39
8	G1/8	0118 08 10 39
	G1/4	0118 08 13 39
10	G3/8	0118 08 17 39
	G1/4	0118 10 13 39
12	G3/8	0118 10 17 39
	G1/4	0118 12 13 39
14	G3/8	0118 12 17 39
	G1/2	0118 14 17 39
15	G1/2	0118 14 21 39
16	G1/2	0118 15 21 39
16	G1/2	0118 16 21 39

Threaded connection with a bi-material bonded seal washer. 0139 bonded seal washers can be found in the "Connection accessories" section.

0119

Double Banjo with Captive Sealing Washer, Male BSPP Thread

Brass, technical polymer



Scan for more dimensions



ØD	C	References
8	G1/4	0119 08 13
	G3/8	0119 08 17

Screw with a bonded seal washer. 0602 bonded seal washers can be found in the "Connection accessories" section.

0119..39

Banjo double avec joint bi-matière, mâle BSPP

Brass, Zinc-plated steel avec joint NBR



Scan for more dimensions



ØD	C	References
4	G1/8	0119 04 10 39
6	G1/8	0119 06 10 39
8	G1/8	0119 08 10 39
	G1/4	0119 08 13 39

Threaded connection with a bi-material bonded seal washer. 0139 bonded seal washers can be found in the "Connection accessories" section.

0111**BNA* Brass Olive**

Brass

Scan for more
dimensions

ØD	References
4	0111 04 00
5	0111 05 00
6	0111 06 00
8	0111 08 00
10	0111 10 00
12	0111 12 00
14	0111 14 00
15	0111 15 00
16	0111 16 00

*BNA (Bureau de Normalisation de l'Automobile) is the French Automobile Standardization Office.

0124**Brass Olive**

Brass

Scan for more
dimensions

ØD	References
4	0124 04 00
5	0124 05 00
6	0124 06 00
8	0124 08 00
10	0124 10 00
12	0124 12 00
14	0124 14 00
15	0124 15 00
16	0124 16 00
18	0124 18 00
20	0124 20 00
22	0124 22 00
25	0124 25 00
28	0124 28 00

0124..40**Steel Olive**

Zinc-plated steel

Scan for more
dimensions

ØD	References
4	0124 04 00 40
5	0124 05 00 40
6	0124 06 00 40
8	0124 08 00 40
10	0124 10 00 40
12	0124 12 00 40
14	0124 14 00 40
15	0124 15 00 40
16	0124 16 00 40
18	0124 18 00 40
20	0124 20 00 40
22	0124 22 00 40
25	0124 25 00 40

0110**Brass Nut**

Brass

Scan for more
dimensions

ØD	C	References
4	M8x1	0110 04 00
5	M10x1	0110 05 00
6	M10x1	0110 06 00
8	M12x1	0110 08 00
10	M16x1.5	0110 10 00
12	M18x1.5	0110 12 00
14	M20x1.5	0110 14 00
15	M20x1.5	0110 15 00
16	M22x1.5	0110 16 00
18	M24x1.5	0110 18 00
20	M27x1.5	0110 20 00
22	M30x1.5	0110 22 00
25	M33x1.5	0110 25 00
28	M36x1.5	0110 28 00

0110..40**Steel Nut**

Zinc-plated steel

Scan for more
dimensions

ØD	C	References
4	M8x1	0110 04 00 40
6	M10x1	0110 06 00 40
8	M12x1	0110 08 00 40
10	M16x1.5	0110 10 00 40
12	M18x1.5	0110 12 00 40
16	M22x1.5	0110 16 00 40
18	M24x1.5	0110 18 00 40

0110..60**Brass Long Nut**

Brass

Scan for more
dimensions

ØD	C	References
4	M8x1	0110 04 00 60
6	M10x1	0110 06 00 60
8	M12x1	0110 08 00 60
10	M16x1.5	0110 10 00 60
12	M18x1.5	0110 12 00 60

0220

Hex Head Plug, Male BSPP and Metric Thread

Brass, technical polymer



Scan for more dimensions



C	References
M5x0.8	0220 19 00
G1/8	0220 10 00
G1/4	0220 13 00
G3/8	0220 17 00
G1/2	0220 21 00

Bonded seal washer supplied. M5: with screwdriver slot for tightening. Max. operating pressure: 20 bar. General characteristics in accordance with BNA 229 (except for M5): BSPP thread (ISO 228-1), metric ISO cylindrical thread (NFE 03-054).

0220..39

Hex Head Plug with Bi-Material Seal, Male BSPP Thread

Brass, zinc plated steel with NBR seal



Scan for more dimensions



C	References
G1/8	0220 10 00 39
G1/4	0220 13 00 39
G3/8	0220 17 00 39
G1/2	0220 21 00 39
G3/4	0220 27 00 39
G1	0220 34 00 39

Plug with a bi-material bonded seal washer. 0139 bi-material bonded seal washers can be found in the "Connection accessories" section. Part numbers with the 39 suffix have a maximum operating pressure of 250 bar.

0125

Tube End Plug for Compression Fitting

Brass



Scan for more dimensions



ØD	C	References
4	M8x1	0125 04 00
6	M10x1	0125 06 00
8	M12x1	0125 08 00
10	M16x1.5	0125 10 00

This part makes it possible to cap off a tube that is already fitted with the nut and compression ring. Equipped with the same male thread as the nut's female thread, it is assembled using the nut and ring taken from the fitting. For final use, simply replace the tube-end plug with the fitting body to obtain a perfect assembly without any modification to the tube.

0126

Plug for Compression Fitting

Brass



Scan for more dimensions



ØD	References
4	0126 04 00
6	0126 06 00
8	0126 08 00
10	0126 10 00
12	0126 12 00
14	0126 14 00
18	0126 18 00
22	0126 22 00

This part is used to plug a port on a fitting; it is installed without a compression ring. When the port is put into service, the nut can easily be reused to connect the tube, and the fitting plug can be stored for another use.

0166

3-Piece Reducer

Brass



Scan for more dimensions



ØD1	ØD2	References
4	6	0166 04 06
5	6	0166 05 06
	8	0166 06 08
6	10	0166 06 10
	12	0166 06 12
	14	0166 06 14
8	10	0166 08 10
	12	0166 08 12
	12	0166 10 12
	14	0166 10 14
10	16	0166 10 16
	18	0166 10 18
	20	0166 10 20
12	16	0166 12 16
	22	0166 12 22
14	16	0166 14 16
	18	0166 14 18
16	20	0166 16 20
	22	0166 16 22
18	22	0166 18 22
20	25	0166 20 25

ØD1: tube to be connected

ØD2: for Øxx mm fitting

Each of the above part numbers includes 3 items:

the reducer itself

the Brass ring, ref. 0124

the nut

0165

Barb Connector for Flexible Tubing



Brass

Scan for more dimensions



ØD1	ØD2	ØD3	References
6	4	4.3	0165 06 06
	6	6.4	0165 06 08
8	6	6.4	0165 08 08
	8	8.4	0165 08 10
	10	10.7	0165 08 12
10	8	8.4	0165 10 10
	10	10.7	0165 10 12
12	10	10.7	0165 12 12
14	12	12.7	0165 14 14
15	13	13.7	0165 15 16
16	13	13.7	0165 16 16

0122

Barb Connector for Hose



Brass

Scan for more dimensions



ØD1	ØD2	ØD3	References
6	4	6	0122 06 04
	7	9	0122 06 07
8	6	8	0122 08 06
	7	9	0122 08 07
	10	12.5	0122 08 10
10	7	9	0122 10 07
	10	12.5	0122 10 10
12	10	12.5	0122 12 10
	13	15	0122 12 13
14	13	15	0122 14 13
	16	18.5	0122 14 16
15	13	15	0122 15 13
	16	18.5	0122 15 16
16	13	15	0122 16 13
	16	18.5	0122 16 16
18	16	18.5	0122 18 16
	19	21.5	0122 18 19
22	19	21.5	0122 20 19
	19	21.5	0122 22 19
25	25	27.5	0122 25 25

0120

Stud Standpipe, Male BSPT Thread



Brass

Scan for more dimensions



ØD	C	References
4	R1/8	0120 04 10
5	R1/8	0120 05 10
6	R1/8	0120 06 10
	R1/4	0120 06 13
8	R1/8	0120 08 10
	R1/4	0120 08 13
	R3/8	0120 08 17
10	R1/4	0120 10 13
	R3/8	0120 10 17
12	R1/2	0120 10 21
	R1/4	0120 12 13
14	R3/8	0120 12 17
	R1/2	0120 12 21
15	R3/8	0120 14 17
	R1/2	0120 14 21
16	R3/8	0120 15 17
	R1/2	0120 15 21
18	R3/8	0120 16 17
	R1/2	0120 16 21
20	R1/2	0120 18 21
	R3/4	0120 18 27
22	R3/4	0120 20 27
22	R3/4	0120 22 27
28	R1	0120 28 34

0128..39

Stud Standpipe with Bi-Material Seal, Male BSPP Thread

Brass, zinc plated steel with NBR seal



Scan for more dimensions



ØD	C	References
4	G1/8	0128 04 10 39
6	G1/8	0128 06 10 39
	G1/4	0128 06 13 39
8	G1/8	0128 08 10 39
	G1/4	0128 08 13 39
10	G1/4	0128 10 13 39
	G3/8	0128 10 17 39
14	G3/8	0128 14 17 39
	G1/2	0128 14 21 39
18	G1/2	0128 18 21 39
	G3/4	0128 18 27 39
22	G3/4	0128 22 27 39
28	G1	0128 28 34 39

Screw with a bi-material bonded seal washer. 0139 bi-material bonded seal washers can be found in the "Connection accessories" section.

0151..39

Straight Male Orientable Adaptor, with Bi-Material Seal, Male BSPP Thread



Scan for more dimensions



C	References
G1/8	0151 10 10 39
G1/4	0151 13 13 39
G3/8	0151 17 17 39
G1/2	0151 21 21 39
G3/4	0151 27 27 39
G1	0151 34 34 39

Screw with a bi-material bonded seal washer. 0139 bi-material bonded seal washers can be found in the "Connection accessories" section.

0112

Sleeve Nut for Compression Fitting,
Male Metric Thread



Brass



ØD	C	References
4	M8x1	0112 04 00
6	M10x1	0112 06 00
8	M12x1	0112 08 00
10	M16x1.5	0112 10 00
12	M18x1.5	0112 12 00
14	M20x1.5	0112 14 00

This part was designed to allow a tube to be connected directly from a manifold or a point of use by means of special machining and a Legris compression ring. For the drawings of the form drills (seat for the Legris compression ring), please contact us.

0168..39

Reducer, with Bi-Material Seal, Male
BSPP Thread/Female BSPP and
Metric Thread



Brass, zinc plated steel with NBR seal



C1	C2	References
G1/8	M5x0.8	0168 10 19 39
G1/4	M5x0.8	0168 13 19 39
G1/4	G1/8	0168 13 10 39
G3/8	G1/8	0168 17 10 39
G3/8	G1/4	0168 17 13 39
G1/2	G1/8	0168 21 10 39
G1/2	G1/4	0168 21 13 39
G1/2	G3/8	0168 21 17 39
G3/4	G1/4	0168 27 13 39
G3/4	G3/8	0168 27 17 39
G3/4	G1/2	0168 27 21 39

Screw with a bi-material bonded seal washer.
0139 bi-material bonded seal washers can be found in the "Connection accessories" section.

0127

Brass Tube Support for Polymer
Tubing



Brass



ØD1	ØD2	References
	2	0127 04 00
4	2.5	0127 04 25
	2.7	0127 04 27
5	3	0127 05 03
	3.3	0127 05 00
6	4	0127 06 00
	5.5	0127 08 55
8	6	0127 08 00
	7	0127 10 07
10	7.5	0127 10 75
	8	0127 10 00
	8	0127 12 08
12	9	0127 12 09
	10	0127 12 00
	11	0127 14 11
14	12	0127 14 00
15	12	0127 15 12
16	13	0127 16 13
18	14	0127 18 14
22	16	0127 22 16

At high temperatures and pressures, using this part—by preventing the tube from retracting—ensures a secure grip.



These compression fittings are designed for robust assemblies, offering superior resistance to harsh environmental conditions and corrosive fluids.

Technical specifications



Fluids: compressed air, treated water



Operating pressure: 10⁻² up to 400 bar



Operating temperature: -60°C to +250°C




Diameter: 6 to 16 mm



Regulations: RoHS, REACH, PED, FDA, CE no. 1935/2004

Performance depends on the fluid, material and tube used.

Component materials

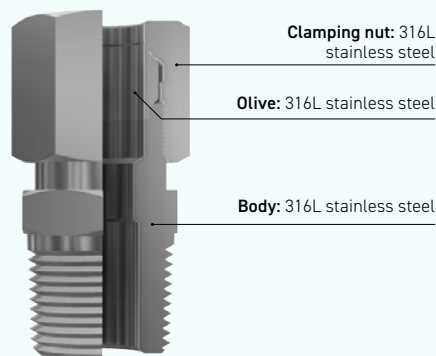

Benefits

- **Chemical resistance:** manufactured in 316L stainless steel to improve resistance to corrosive fluids.
- **High durability:** the all-stainless steel design withstands vibrations and shocks in demanding environments.

Installation guide

Maximum nominal

The table below shows the maximum nominal diameter based on the installation threads for a few examples of tube diameters.

Tube O.D.	BSP thread	Max. nominal diameter
6	G1/8	4
6-8-10	G1/4	7
10-12	G3/8	11
16	G1/2	14

Recommended tube and fitting assembly configurations

Type of tube	Stainless steel tube: cold-drawn, seamless "thin" tube, white annealed and in straight lengths.			
Type of assembly	Assembly made with Legris stainless steel olive and nut			
Common name of the tube	Tube dimensions		Maximum regular operating pressure (bar)	Operating pressure with water hammer (bar)
	Ø ext.	thick.		
4 x 6	6	1	400	290
6 x 8	8	1	310	225
8 x 10	10	1	240	185
10 x 12	12	1	200	145
14 x 16	16	1	140	110

Annealed stainless steel tube in coils: reduce operating pressure by 35%

The above recommendations are given according to specific test conditions. As each application is different, it is advisable to carry out tests under real conditions of use in order to obtain the appropriate results.

Recommended applications



Tube length for assembly



Minimum length of the tube (L) between 2 fittings.

ØD	L (mm)	ØD	L (mm)
4	26.5	10	39
6	26	12	39
8	32	16	46.5

Recommended nut tightening torques

With stainless steel tube with a wall thickness of 1 mm.

Tightening torque maximum (daN.m)	Nominal diameter				
	6	8	10	12	16
	2	3	4	6.5	9.5

1805

Stud Fitting, Male BSPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	R1/8	1805 06 10
	R1/4	1805 06 13
8	R1/8	1805 08 10
	R1/4	1805 08 13
10	R1/4	1805 10 13
	R3/8	1805 10 17
12	R1/2	1805 10 21
	R1/4	1805 12 13
16	R3/8	1805 12 17
	R1/2	1805 12 21
16	R3/8	1805 16 17
	R1/2	1805 16 21

1805

Stud Fitting, Male NPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	NPT1/8	1805 06 11
	NPT1/4	1805 06 14
8	NPT3/8	1805 06 18
	NPT1/8	1805 08 11
10	NPT1/4	1805 08 14
	NPT3/8	1805 10 18
12	NPT1/2	1805 10 22
	NPT1/4	1805 12 14
12	NPT3/8	1805 12 18
	NPT1/2	1805 12 22

1814

Stud Fitting, Female BSPP Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	G1/8	1814 06 10
	G1/4	1814 06 13
8	G1/4	1814 08 13
	G3/8	1814 10 17
10	G1/2	1814 10 21
	G3/8	1814 12 17
12	G1/2	1814 12 21
	G1/2	1814 16 21

1809

Stud Elbow, Male BSPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	R1/8	1809 06 10
	R1/4	1809 06 13
8	R1/8	1809 08 10
	R1/4	1809 08 13
10	R1/4	1809 10 13
	R3/8	1809 10 17
12	R1/2	1809 10 21
	R1/4	1809 12 13
16	R3/8	1809 12 17
	R1/2	1809 12 21
16	R3/8	1809 16 17
	R1/2	1809 16 21

1809

Stud Elbow, Male NPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	NPT1/4	1809 06 14
	NPT1/8	1809 08 11
8	NPT1/4	1809 08 14
	NPT1/4	1809 10 14
10	NPT3/8	1809 10 18
	NPT1/2	1809 10 22
12	NPT1/2	1809 12 22

1820

Stud Standpipe, Male BSPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
6	R1/8	1820 06 10
	R1/4	1820 06 13
8	R1/8	1820 08 10
	R1/4	1820 08 13
10	R1/4	1820 10 13
	R3/8	1820 10 17
12	R1/2	1820 10 21
	R1/4	1820 12 13
16	R3/8	1820 12 17
	R1/2	1820 12 21
16	R1/2	1820 16 21

1820

Stem Adaptor, Male NPT Thread

Stainless steel 316L



Scan for more dimensions



ØD	C	References
10	NPT1/4	1820 10 14
	NPT1/4	1820 12 14
12	NPT1/4	1820 12 14
	NPT1/2	1820 12 22

1806**Equal Tube-to-Tube Connector**

Stainless steel 316L

Scan for more dimensions



ØD	References
6	1806 06 00
8	1806 08 00
10	1806 10 00
12	1806 12 00
16	1806 16 00

1816**Equal Bulkhead Connector**

Stainless steel 316L

Scan for more dimensions



ØD	References
6	1816 06 00
8	1816 08 00
10	1816 10 00
12	1816 12 00
16	1816 16 00

1802**Equal Elbow**

Stainless steel 316L

Scan for more dimensions



ØD	References
6	1802 06 00
8	1802 08 00
10	1802 10 00
12	1802 12 00
16	1802 16 00

1804**Equal Tee**

Stainless steel 316L

Scan for more dimensions



ØD	References
6	1804 06 00
8	1804 08 00
10	1804 10 00
12	1804 12 00
16	1804 16 00

1866**3-Piece Reducer**

Stainless steel 316L

Scan for more dimensions



ØD1	ØD2	References
6	8	1866 06 08
	10	1866 06 10
8	10	1866 08 10

1824**Stainless Steel Olive**

Stainless steel 316L

Scan for more dimensions



ØD	References
6	1824 06 00
8	1824 08 00
10	1824 10 00
12	1824 12 00
16	1824 16 00

1810**Stainless Steel Nut**

Stainless steel 316L

Scan for more dimensions



ØD	C	References
6	M10x1	1810 06 00
8	M12x1	1810 08 00
10	M16x1.5	1810 10 00
12	M18x1.5	1810 12 00
16	M22x1.5	1810 16 00

1822**Barb Adaptor for Hose**

Stainless steel 316L

Scan for more dimensions



ØD1	ØD2	ØD3	References
6	7	9	1822 06 07
	6	8	1822 08 06
8	7	9	1822 08 07
	10	12.5	1822 08 10
10	7	9	1822 10 07
	10	12.5	1822 10 10
12	10	12.2	1822 12 10
	13	15	1822 12 13

1827**Tube Support for Fluoropolymer Tubing**

Stainless steel 316L

Scan for more dimensions



ØD1	ØD2	References
6	4	1827 06 00
8	6	1827 08 00
10	8	1827 10 00
12	9	1827 12 09
	10	1827 12 00
16	13	1827 16 13
	14	1827 16 00

This sleeve must be used with fluoropolymer tubing, at all temperatures and pressures compatible with the fitting/tube assembly.

04

THE MARKET BENCHMARK

For over 50 years, Rectus couplers have been the benchmark in the industrial pneumatic market, as well as in specialised fluid transfer sectors.

RELIABILITY AND DURABILITY

The in-house manufacture of Rectus couplers guarantees our customers optimum reliability and durability for repeated connections and disconnections.

A ROBUST SUPPLY CHAIN

Thanks to localised production in Germany and integrated logistics in Europe, our wide range of Rectus couplers is available quickly and continuously.





RECTUS COUPLERS

PRODUCTS OFFER

RECTUS COUPLERS		Profile	DN	Air  Flow rate NL/min	Water  Flow rate NL/min	Function	Series	PAGE
BRASS Page 122 Brass body 		EURO	2.7	165	-	KA	20	123
		EURO	5	550	-	KA	21	125
		ISO B	5.5	820	-	KA	24	127
		ARO	5.5	660	-	KA	14	128
		EURO	7.2	1070	-	KA	26	129
NICKEL-PLATED BRASS   Page 132 Nickel-plated brass body (*nickel-plated steel) 		Rectus	1.5	50	0.6	KA	2	134
		EURO	2.7	130 to 165	1.2 to 1.5	KA, KB, KF	20	135
		EURO	5	310 to 550	2.7 to 7	KA, KB, KF	21	139
		Rectus	5	310 to 550	2.7 to 7	KA, KB	21 coded	139
		ISO B	5.5	960	14	KA	23	145
		ISO C	5.5	970	12.7	KA	18	146
		ARO	5.5	800	15	KA	22	147
		EURO	7.8	710 to 1800	7.1 to 28	KA, KB, KF	25	148
		Rectus	7.8	710 to 1800	7.1 to 28	KA, KB	25 coded	148
		ISO B	8.5	1050	14	KA	30*	152
		ARO	9	1400	18	KA	40	153
		EURO	10	950 to 2400	14 to 31	KA, KB, KF	27	154
		ISO B	11	2600	33	KA	37	156
		ISO 7241-1 B	13	-	79	KB	75	157
		American	15	2150	27	KB	38	158
		American	19	3000	33	KB	39	159
STAINLESS STEEL   Page 160 Stainless steel body 303 or 316L 		EURO	2.7	130	1.2	KA, KB, KF	20	161
		ISO C	3	160	2.2	KB	303	164
		EURO	5	310	2.7	KA, KB, KF	21	165
		Rectus	5	310	2.7	KA, KB, KF	21 coded	165
		EURO	7.4	710	7.1	KA, KB, KF	25	169
		EURO	10	950	14	KA, KB, KF	27	172
		ISO 7241-1 B	4.3-20	-	6 to 117	KB, KF	70	174
HIGH FLOW Page 176 Steel body 		ISO B	5.5	950	-	KA	1400/1423	177
		EURO	7.8	2020	-	KA	1600/1625	178
		EURO	10	3500	-	KA	1700/1727	179
SAFETY DISCONNECTION Page 180 	Industrial version   Nickel-plated brass body	Rectus	5-7.8	310 to 1800	2.7 to 28	KS, KD	21/25	182
	Breathing air version  Nickel-plated brass or 303 stainless steel body	Rectus	7.4	1700	-	KS	95/96	184
SELF-VENTING SAFETY Page 186 	Push-button version  Aluminium body	ISO B	5.5-8	675 to 1970	-	KP	24/30	188, 191
		ISO C	5.5-8	810 to 2100	-	KP	18/84	189, 192
		EURO	7.4	1225	-	KP	26	190
	Translation sleeve version  Nickel-plated steel brass body	ISO B	5.5	950	-	KE	1400	193
		ARO	5.5	1400	-	KE	14	194
		EURO	7.4-10	830 to 3500	-	KE	26/1600/1700	195
	Rotating sleeve version  Technical polymer body	ARO	5.5	1250	-	KE	94**A	198
		ISO B	5.5-8	1250 to 2400	-	KE	94**U	199, 200
		EURO	7.2	2000	-	KE	94**E	201
THERMOPLASTICS Page 202 Engineering polymer body 		EURO	5	310 to 550	2.7 to 7	KB	21	202
		Rectus	5	310 to 550	2.7 to 7	KB	21 coded	203
		Rectus	7	770 to 1100	12 to 17	KB	48/48 coded	208
		ISO 7241-1 B	6-20	-	-	KB	70	211
FLAT FACE  Page 212 Nickel-plated brass body or stainless steel 		EURO	5-7.8	-	2.7 to 7.1	KL	21/25	215, 218
		Rectus	4-6-9 & 3-9	-	1.2 to 27	KL	200	214, 217, 219

HOW TO CHOOSE YOUR COUPLER

What type of fluid do you wish to convey?



Parker offers ranges dedicated to **compressed air and neutral gases**. Most of our couplers have a minimum vacuum performance of 96%.



Parker presents ranges specifically designed for **water**, including:

- *Industrial water (tap water).*
- *Treated water (deionised, pure and demineralised)*


All our solutions are compatible with glycol mixtures.



Parker also has ranges compatible with **technical gases**:

- *Oxygen, breathing air, carbon dioxide, analytical gases, anaesthetic gases and inert gases.*

In what kind of environment do you use your coupler?

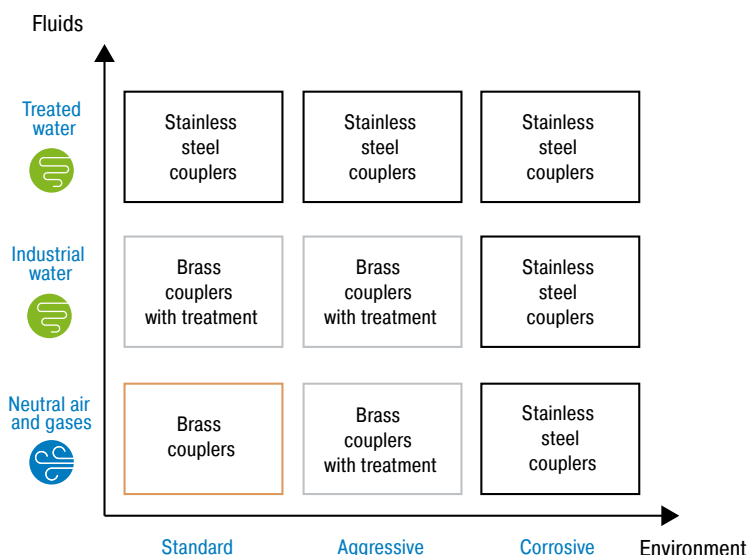

Which function do you require?

FLOW CONTROL?



KA Single Shut-off

- The plug is full bore
- Flow is stopped by the valve inside the coupler during disconnection.



KB Double Shut-off

- Valve in the end piece and coupler
- Pressure is maintained on both sides.



KF Straight-Through

- Better flow rate/no turbulence
- Ideal for use with liquids



KL Dry-Break

- The coupler and the plug have a flat valve.
- Ideal to prevent drops of the medium escaping

ENSURE SAFETY?

with an anti-disconnection system



KS Single Shut-off

- Same as KA with locking mechanism to prevent accidental disconnection



KD Double Shut-off

- Same as KB with locking mechanism to prevent accidental disconnection

with self-venting system anti whiplash effect



KE Self-venting Sleeve Design

- Self-venting system to prevent accidental disconnection or whiplash effect



KP Self-venting Push Button

HOW TO CHOOSE YOUR COUPLER

Do you have any compliance requirements?


- All our products comply with RoHS and REACH standards.
- All our processes comply with ISO 9001 and ISO 14001 standards.

For a complete list of our certificates, [please click here.](#)



What profile do you need?

The standard profiles of the Rectus couplers range in the catalogue are as follows:

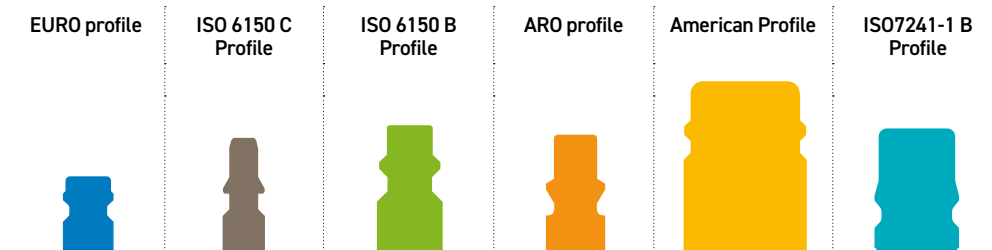

Parker also offers other profiles for its Rectus couplers, available at parker.com.

DN	Profile	Series	QR code
2	Rectus	Mini series	
2.5	German	50 series	
3	Rectus	Mini series	
5	British	17 series	
5	Rectus	Standard series	
5.5	British	19 series	

DN	Profile	Series	QR code
6	German	52 series	
7.5	Japanese	13 series	
8	Scandinavian	33 series	
10	Rectus	41 series	
10	Scandinavian	34 series	
12	German	57 series	

Part number identification

Couplers

KA = Single Shut-off
 KB = Double Shut-off
 KF = Straight Through
 KL = Flat face (double Shut-off)
 KE = Self-venting system
 KP = Push button
 KS = Safety (Single Shut-off)
 KD = Safety (Double Shut-off)

Plugs

SF = Single Shut-off
 SB = Double Shut-off
 SL = Flat face (double Shut-off)
 SS = Safety (Single Shut-off)
 SD = Safety (Double Shut-off)

Metric threads

05 = M5
 10 = M10 x 1
 12 = M12 x 1.5
 14 = M14 x 1.5
 16 = M16 x 1.5
 18 = M18 x 1.5

Thread sizes

10 = 1/8"
 13 = 1/4"
 17 = 3/8"
 21 = 1/2"
 26 = 3/4"
 33 = 1"

Hose connection

03 = for 3 mm LW (1/8")
 04 = for 4 mm LW (5/32")
 06 = for 5 mm LW (1/4")
 08 = for 8 mm LW (5/16")
 09 = for 9 mm LW (3/8")
 13 = for 13 mm LW (1/2")
 19 = for 19 mm LW (3/4")
 25 = for 25 mm LW (1")

Plastic hose

04 = for 3 x 4 mm
 05 = for 3 x 5 mm
 36 = for 3 x 6.3 mm
 06 = for 4 x 6 mm
 46 = for 4 x 6.3 mm
 08 = for 6 x 8 mm
 10 = for 8 x 10 mm
 12 = for 9 x 12 mm
 16 = for 13 x 16 mm

Seal

X = Without seal
 P = Perbunan (NBR)
 V = FKM/FPM
 E = Ethylene Propylene Diene Monomer (EPDM)
 S = Silicone
 K = FFKM

**Addition 2
Colour code**

B = Blue
 G = Green
 R = Red
 Y = Yellow

Surface

X = without surface treatment
 N = nickel-plated
 Z = zinc-coated
 P = PEEK compression springs (only for Rectuchem+)

21**KA****AW****13****M****P****X****X****X**

Serial
numbers

Material

M = Brass CuZn39Pb3 2.0401 (except sleeve)
 B = Brass CuZn39Pb3 2.0401 (completely)
 S = 9SMnPb28K steel 1.0718
 R = AISI 303 stainless steel
 E = AISI 316 L stainless steel
 D = POM (Delrin)
 F = PVDF

Hose connection

TF = Hose barb
 TH = Hose barb 45°
 TS = Panel Mount with Hose barb
 TD = for DIN EN 560 tube
 TE = Front Panel Installation, Hose Barb Panel Mount

Plastic Tube connection

K0 = with Hose Nut, without spring guard
 KS = Panel mounted, without spring guard
 KE = Panel mounted, with plastic hose connection
 KK = with spring guard

Male threads

AW = BSP parallel
 AM = Metric thread DIN 13
 AK = BSP tapered
 AN = NPT thread
 RP = with LF Push-In connection
 AF = UNF
 AO = Hexagon fitted with a seal
 AR = 90° tapered BSP

Female threads

IW = Parallel Withworth ISO 228
 IM = Metric DIN 13
 IN = NPSF B1.20.3
 IT = Conical NPT B1.20.1

Addition 1

S = Marking for special version
 0 = RECTUKey round
 3 = RECTUKey triangle
 6 = RECTUKey hexagon
 8 = RECTUKey octagon





For over 50 years, Rectus has been offering a range of **brass couplers** suitable for pneumatic applications in standard environments, available in several diameters and profiles for industry and maintenance and repair workshops.

Technical specifications



Fluids: compressed air and neutral gases



Operating pressure: up to 35 bar



Operating temperature: -20°C to +100°C



Functions: KA




Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
2.7	EURO	165	20	20
5	EURO	550	21	21
5.5	ISOB	820	24	23
5.5	ARO	660	14	22
7.2	EURO	1070	26	26

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.



Components materials

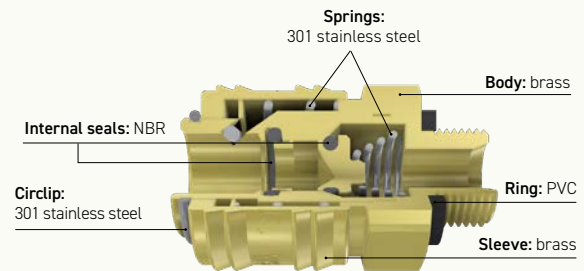

Benefits

- **All standard sizes** for the most common industrial applications.
- **Wide range of connections** facilitating numerous connection options for pneumatic tools.
- **Design with NBR seal** compatible with most compressed air applications.
- **Series 26 coupler available in polymer sleeve version**, offering lightness and ease of use.

Recommended applications

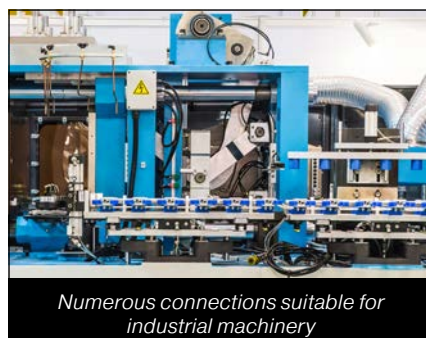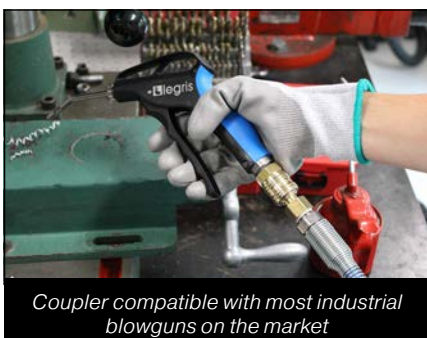

20KAAM

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
M5	20KAAM05MPX

20KAAW

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
G1/8	20KAAW10MPX

20KAIM

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
M5	20KAIM05MPX

20KAIW

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
G1/8	20KAIW10MPX

20KAKO

Coupler with valve, with Plastic Hose Connection

Brass, NBR



Scan for more dimensions



A	References
3 x 4	20KAKO04MPX
3 x 5	20KAKO05MPX
4 x 6	20KAKO06MPX

20KAKS

Coupler with valve, Panel Mount with Plastic Hose Connection

Brass, NBR



Scan for more dimensions



A	References
4 x 6	20KAKS06MPX

20KATF

Coupler with valve, Hose Barb

Brass, NBR



Scan for more dimensions



A	References
3	20KATF03MPX
4	20KATF04MPX
5	20KATF05MPX
6	20KATF06MPX

20KATS

Coupler with valve, Panel Mount with Hose Barb

Brass, NBR



Scan for more dimensions



A	References
3	20KATS03MPX
6	20KATS06MPX

20SFAM

Plug without valve, Male Thread

Brass



Scan for more dimensions




A	References
M5	20SFAM05MXX

20SFAW

Plug without valve, Male Thread

Brass



Scan for more dimensions



A	References
G1/8	20SFAW10MXX

20SFIM

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
M5	20SFIM05MXX

20SFIW

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
G1/8	20SFIW10MXX

20SFKO

Plug without valve, with Plastic Hose Connection

Brass



Scan for more dimensions



A	References
3 x 4	20SFKO04MXX
4 x 6	20SFKO06MXX
3 x 6.3	20SFKO36MXX

20SFKS

Plug without valve, Panel Mount with Plastic Hose Connection

Brass



Scan for more dimensions



A	References
3 x 4	20SFKS04MXX
4 x 6	20SFKS06MXX

20SFTF

Plug without valve, Hose Barb

Brass



Scan for more dimensions



A	References
3	20SFTF03MXX
4	20SFTF04MXX

20SFTS

Plug without valve, Panel Mount with Hose Barb

Brass



Scan for more dimensions



A	References
3	20SFTS03MXX
4	20SFTS04MXX

21KAAK

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
R3/8	21KAAK17MPX

21KAAW

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
G1/8	21KAAW10MPX
G1/4	21KAAW13MPX
G3/8	21KAAW17MPX

21KAIW

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
G1/8	21KAIW10MPX
G1/4	21KAIW13MPX
G3/8	21KAIW17MPX

21KAKE

Coupler with valve, panel mount for hose

Brass, NBR



Scan for more dimensions



A	References
6 x 8	21KAKE08MPX
6	20KATS06MPX

21KAKK

Coupler with valve, Plastic Hose Connection with Spring Guard

Brass, NBR



Scan for more dimensions



A	References
4 x 6	21KAKK06MPX
6 x 8	21KAKK08MPX

21KAKO

Coupler with valve, with Plastic Hose Connection

Brass, NBR



Scan for more dimensions



A	References
4 x 6	21KAKO06MPX
6 x 8	21KAKO08MPX

21KAKS

Coupler with valve, Panel Mount with Plastic Hose Connection

Brass, NBR



Scan for more dimensions



A	References
4 x 6	21KAKS06MPX
6 x 8	21KAKS08MPX

21KATF

Coupler with valve, Hose Barb

Brass, NBR



Scan for more dimensions



A	References
4	21KATF04MPX
5	21KATF05MPX
6	21KATF06MPX
8	21KATF08MPX
9	21KATF09MPX
10	21KATF10MPX

21KATS

Coupler with valve, Panel Mount with Hose Barb

Brass, NBR



Scan for more dimensions



A	References
6	21KATS06MPX
8	21KATS08MPX
9	21KATS09MPX
10	21KATS10MPX

21SFAK

Plug without valve, Male Thread

Brass



Scan for more dimensions



A	References
R1/4	21SFAK13MXX

21SFAW

Plug without valve, Male Thread

Brass



Scan for more dimensions



A	References
G1/8	21SFAW10MXX
G1/4	21SFAW13MXX
G3/8	21SFAW17MXX

21SFIM

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
M12 x 1.5	21SFIM12MXX

21SFIW

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
G1/8	21SFIW10MXX
G1/4	21SFIW13MXX
G3/8	21SFIW17MXX

21SFKO

Plug without valve, with Plastic Hose Connection

Brass



Scan for more dimensions



A	References
4 x 6	21SFKO06MXX
6 x 8	21SFKO08MXX

21SFKS

Plug without valve, Panel Mount with Plastic Hose Connection

Brass



Scan for more dimensions



A	References
4 x 6	21SFKS06MXX
6 x 8	21SFKS08MXX

21SFTF

Plug without valve, Hose Barb

Brass



Scan for more dimensions



A	References
4	21SFTF04MXX
5	21SFTF05MXX
6	21SFTF06MXX
8	21SFTF08MXX
9	21SFTF09MXX
10	21SFTF10MXX

21SFTS

Plug without valve, Panel Mount with Hose Barb

Brass



Scan for more dimensions



A	References
6	21SFTS06MXX

24KAAW

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
G1/4	24KAAW13MPX
G3/8	24KAAW17MPX
G1/2	24KAAW21MPX

24KAIW

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
G1/4	24KAIW13MPX
G3/8	24KAIW17MPX
G1/2	24KAIW21MPX

24KATF

Coupler with valve, Hose Barb

Brass, NBR



Scan for more dimensions



A	References
6	24KATF06MPX
8	24KATF08MPX
10	24KATF10MPX
13	24KATF13MPX

23SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

14KAAK

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
R1/2	14KAAK21MPX

14KAAW

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References
G1/4	14KAAW13MPX
G3/8	14KAAW17MPX
G1/2	14KAAW21MPX

14KAIW

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
G1/4	14KAIW13MPX
G3/8	14KAIW17MPX
G1/2	14KAIW21MPX

14KATF

Coupler with valve, Hose Barb

Brass, NBR



Scan for more dimensions



A	References
6	14KATF06MPX
8	14KATF08MPX
9	14KATF09MPX
10	14KATF10MPX
13	14KATF13MPX

22SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	22SFAK10SXN
R1/4	22SFAK13SXN
R3/8	22SFAK17SXN
R1/2	22SFAK21SXN

22SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFAW13SXN
G1/2	22SFAW21SXN

22SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFIW13SXN
G3/8	22SFIW17SXN
G1/2	22SFIW21SXN

22SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	22SFTF06SXN
8	22SFTF08SXN
9	22SFTF09SXN
10	22SFTF10SXN
13	22SFTF13SXN

26KAAW

Coupler with valve, Male Thread

Brass, NBR



Scan for more dimensions



A	References	
	Brass sleeve	Polymer sleeve
G1/8	26KAAW10MPX	
G1/4	26KAAW13MPX	26KAAW13MPXY
G3/8	26KAAW17MPX	26KAAW17MPXY
G1/2	26KAAW21MPX	26KAAW21MPXY

26KAIM

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References
M14 x 1.5	26KAIM14MPX
M16 x 1.5	26KAIM16MPX

26KAIW

Coupler with valve, Female Thread

Brass, NBR



Scan for more dimensions



A	References	
	Brass sleeve	Polymer sleeve
G1/4	26KAIW13MPX	26KAIW13MPXY
G3/8	26KAIW17MPX	26KAIW17MPXY
G1/2	26KAIW21MPX	26KAIW21MPXY

26KAKK

Coupler with valve, Plastic Hose Connection with Spring Guard

Brass, NBR



Scan for more dimensions



A	References
6 x 8	26KAKK08MPX
8 x 10	26KAKK10MPX
9 x 12	26KAKK12MPX

26KAKO

Coupler with valve, with Plastic Hose Connection

Brass, NBR



Scan for more dimensions



A	References
4 x 6	26KAKO06MPX
6 x 8	26KAKO08MPX
8 x 10	26KAKO10MPX
9 x 12	26KAKO12MPX

26KATF

Coupler with valve, Hose Barb

Brass, NBR



Scan for more dimensions



A	References	
	Brass sleeve	Polymer sleeve
6	26KATF06MPX	26KATF06MPXY
8	26KATF08MPX	26KATF08MPXY
9	26KATF09MPX	26KATF09MPXY
10	26KATF10MPX	26KATF10MPXY
13	26KATF13MPX	26KATF13MPXY

26KATS

Coupler with valve, Panel Mount with Hose Barb

Brass, NBR



Scan for more dimensions



A	References
6	26KATS06MPX
8	26KATS08MPX
10	26KATS10MPX

26SAW

Plug without valve, Male Thread

Brass



Scan for more dimensions



A	References
G1/8	26SAW10MXX
G1/4	26SAW13MXX
G3/8	26SAW17MXX
G1/2	26SAW21MXX

26SFIM

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
M14 x 1.5	26SFIM14MXX
M16 x 1.5	26SFIM16MXX

26SFIW

Plug without valve, Female Thread

Brass



Scan for more dimensions



A	References
G1/8	26SFIW10MXX
G1/4	26SFIW13MXX
G3/8	26SFIW17MXX
G1/2	26SFIW21MXX

26SFKK

Plug without valve, Plastic Hose Connection with Spring Guard

Brass



Scan for more dimensions



A	References
4 x 6	26SFKK06MXX
6 x 8	26SFKK08MXX
8 x 10	26SFKK10MXX
9 x 12	26SFKK12MXX

26SFKO

Plug without valve, with Plastic Hose Connection

Brass



Scan for more dimensions



A	References
4 x 6	26SFKO06MXX
6 x 8	26SFKO08MXX
8 x 10	26SFKO10MXX
9 x 12	26SFKO12MXX

26SFTF

Plug without valve, Hose Barb

Brass



Scan for more dimensions



A	References
4	26SFTF04MXX
6	26SFTF06MXX
8	26SFTF08MXX
9	26SFTF09MXX
10	26SFTF10MXX
13	26SFTF13MXX

26SFTS

Plug without valve, Panel Mount with Hose Barb

Brass



Scan for more dimensions



A	References
8	26SFTS08MXX
10	26SFTS10MXX





Coated with chemical nickel plating, these **Rectus couplers** offer a reliable solution for air and neutral gases in aggressive environments, while ensuring a consistent aesthetic appearance throughout the entire process. They are also available in a double Shut-off version for liquids in standard or aggressive environments, and in a full bore version to optimise flow rate.

Technical specifications



Fluids: compressed air, neutral gases, industrial water



Operating pressure: up to 35 bar (160 bar for the 75 series)



Operating temperature: -20°C to +100°C




Functions: KA, KB, KF



Regulations: RoHS, REACH

Components materials

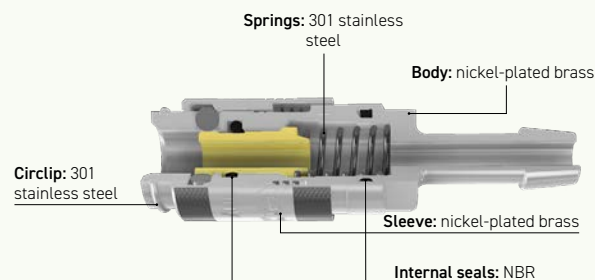

Nominal diameter (mm)	Profile	Flow rate (NL/min)*		Series coupler	Plugs series
		Air 	Water 		
1.5	Rectus	50 (KA)	0.6 (KA)	2	2
2.7	EURO	130 (KB) to 165 (KA)	1.2 (KB) to 1.5 (KA)	20	20
5	EURO	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21	21
5	EURO	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21 coded	21 coded
5.5	ISO B	960 (KA)	14 (KA)	23	23
5.5	ISO C	970 (KA)	12.7 (KA)	18	18
5.5	ARO	800 (KA)	15 (KA)	22	22
7.8	Rectus	710 (KB) to 1800 (KA)	7.1 (KB) to 28 (KA)	25	25
7.8	EURO	710 (KB) to 1800 (KA)	7.1 (KB) to 28 (KA)	25 coded	25 coded
8.5	ISO B	1050 (KA)	14 (KA)	30	30
9	ARO	1400 (KA)	18 (KA)	40	40
10	EURO	950 (KB) to 2400 (KA)	14 (KB) to 31 (KA)	27	27
11	ISO B	2600 (KA)	33 (KA)	37	37
13	ISO 7241-1 B	-	79 (KB)	75	75
15	American	2150 (KB)	27 (KB)	38	38
19	American	3000 (KB)	33 (KB)	39	39

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Identification of coded versions



Benefits

- **Nickel-plated brass design** to withstand mechanical shocks and ensure greater robustness in harsh environments.
- **Surface treatment** facilitates the integration of couplers into processes where aesthetics are an important factor.
- **Available with double shut-off (KB)** for optimal use with industrial water in standard and aggressive environments.
- **Also available in Straight-Through (KF)** to optimise air flow in aggressive environments.
- **The 21 and 25 series are available in coded versions** to secure the coupler to its plug and prevent fluid mixing.
- **The 75 series stands out for its high flow rate**, high pressure resistance and low pressure drop.

Recommended applications



Robustness in harsh environments




Shiny appearance for aesthetic integration into industrial processes

02KAAM

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M3	02KAAM03MPN

02KAIM

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M3	02KAIM03MPN

02KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
2	02KATF02MPN
3	02KATF03MPN

02KATS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions




A	References
2	02KATS02MPN
3	02KATS03MPN

02SFAM

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
M3	02SFAM03MXN

02SFIM

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
M3	02SFIM03MXN

02SFTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
2	02SFTF02MXN
3	02SFTF03MXN

02SFTS

Plug without valve, Panel Mount with Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
2	02SFTS02MXN

20KAUF

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
No.10-32 UNF	20KAUF05MPN

20KAAM

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
M3	20KAAM03MPN 20KAAM05MPN
M5	20KAAM05MEN 20KAAM05MVN

20KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/8	20KAAW10MPN

20KAIM

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
M5	20KAIM05MPN 20KAIM05MEN

20KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/8	20KAIW10MPN

20KAKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
3 x 4	20KAKO04MPN
3 x 5	20KAKO05MPN
4 x 6	20KAKO06MPN 20KAKO06MVN
3 x 6.3	20KAKO36MPN

20KAKS

Coupler with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3 x 4	20KAKS04MPN
3 x 5	20KAKS05MPN
4 x 6	20KAKS06MPN
3 x 6.3	20KAKS36MPN

20KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
2	20KATF02MPN
3	20KATF03MPN
4	20KATF04MPN
5	20KATF05MPN
9	20KATF09MPN

20KATS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3	20KATS03MPN
4	20KATS04MPN
6	20KATS06MPN

20KBAM

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
M5	20KBAM05MPN 20KBAM05MEN 20KBAM05MVN

20KBAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	20KBAW10MPN 20KBAW10MEN 20KBAW10MVN

20KBIM

Coupler with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
M5	20KBIM05MPN 20KBIM05MVN
M12x1	20KBIM12MPN

20KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	20KBIW10MPN
	20KBIW10MEN
	20KBIW10MVN

20KBKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
3 x 4	20KBKO04MPN
	20KBKO04MEN
	20KBKO04MVN
3 x 5	20KBKO05MPN
	20KBKO06MPN
4 x 6	20KBKO06MEN
	20KBKO06MVN

20KBKS

Coupler with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
3 x 4	20KBKS04MEN
4 x 6	20KBKS06MPN
3 x 6.3	20KBKS36MPN

20KBTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
3	20KBTF03MPN
4	20KBTF04MPN
5	20KBTF05MPN
	20KBTF05MEN
	20KBTF05MVN

20KBTS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3	20KBTS03MPN
4	20KBTS04MPN

20KFAM

Coupler without valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M5	20KFAM05MPN

20KFAW

Coupler without valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/8	20KFAW10MPN

20KFIM

Coupler without valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M5	20KFIM05MPN

20KFKO

Coupler without valve, with plastic hose connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3 x 4	20KFKO04MPN
4 x 6	20KFKO06MPN

20KFKS

Coupler without valve, panel mount, with plastic hose connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3 x 4	20KFKS04MPN
3 x 5	20KFKS05MPN
4 x 6	20KFKS06MPN

20KFTF

Coupler without valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3	20KFTF03MPN
4	20KFTF04MPN
5	20KFTF05MPN

20KFTS

Coupler without valve, panel mount with hose barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3	20KFTS03MPN
4	20KFTS04MPN

20SBAM

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
M5	20SBAM05MPN 20SBAM05MEN
M6	20SBAM06MPN

20SBAW

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	20SBAW10MPN 20SBAW10MEN 20SBAW10MVN

20SBIM

Plug with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
M5	20SBIM05MPN 20SBIM05MVN

20SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
G1/8	20SBIW10MPN 20SBIW10MEN

20SBKO

Plug with valve, with Plastic Hose Connection

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions




A	References
3 x 4	20SBKO04MPN 20SBKO04MVN
3 x 5	20SBKO05MPN 20SBKO06MPN
4 x 6	20SBKO06MEN 20SBKO06MVN

20SBKS

Plug with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
3 x 4	20SBKS04MPN 20SBKS04MVN
4 x 6	20SBKS06MPN 20SBKS06MVN

20SBTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
3	20SBTF03MPN
4	20SBTF04MPN 20SBTF04MEN
5	20SBTF05MPN 20SBTF05MVN

20SBTS

Plug with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
3	20SBTS03MPN
4	20SBTS04MPN

20SFAM

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
M5	20SFAM05MXN
M6	20SFAM06MXN

20SFAW

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/8	20SFAW10MXN

20SFIM

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
M5	20SFIM05MXN

20SFIW

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/8	20SFIW10MXN

20SFKO

Plug without valve, with Plastic
Hose Connection

Nickel-plated brass



Scan for more
dimensions




A	References
3 x 4	20SFKO04MXN
3 x 5	20SFKO05MXN
4 x 6	20SFKO06MXN
3 x 6.3	20SFKO36MXN

20SFKS

Plug without valve, Panel Mount
with Plastic Hose Connection

Nickel-plated brass



Scan for more
dimensions



A	References
3 x 4	20SFKS04MXN
3 x 5	20SFKS05MXN
4 x 6	20SFKS06MXN

20SFRP

Plug without valve, Push-In

Nickel-plated brass



Scan for more
dimensions



A	References
4	20SFRP04MPN

20SFTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more
dimensions



A	References
2	20SFTF02MXN
3	20SFTF03MXN
4	20SFTF04MXN
5	20SFTF05MXN

20SFTS

Plug without valve, Panel Mount
with Hose Barb

Nickel-plated brass



Scan for more
dimensions



A	References
3	20SFTS03MXN
4	20SFTS04MXN

21KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/8	21KAAW10MPN
	21KAAW10MPN0 ●
	21KAAW10MPN3 ▲
	21KAAW10MPN6 ●
G1/4	21KAAW10MPN8 ●
	21KAAW13MPN
	21KAAW13MPN0 ●
	21KAAW13MPN3 ▲
	21KAAW13MPN6 ●
	21KAAW13MPN8 ●
	21KAAW13MPN
G3/8	21KAAW13MPN0 ●
	21KAAW13MPN6 ●
	21KAAW17MPN

21KAIM

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M12 x 1.5	21KAIM12MPN

21KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/8	21KAIW10MPN
	21KAIW10MPN0 ●
	21KAIW10MPN3 ▲
	21KAIW10MPN6 ●
	21KAIW10MPN8 ●
G1/4	21KAIW10MPN
	21KAIW13MPN
	21KAIW13MPN0 ●
	21KAIW13MPN3 ▲
	21KAIW13MPN6 ●
G3/8	21KAIW13MPN8 ●
	21KAIW17MPN

21KAKK

Coupler with valve, with Plastic Hose Connection with Spring Guard

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
4 x 6	21KAKK06MPN
	21KAKK06MEN
6 x 8	21KAKK08MPN

21KAKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
4 x 6	21KAKO06MPN
	21KAKO06MPN0 ●
	21KAKO06MPN3 ▲
	21KAKO06MPN6 ●
	21KAKO06MPN8 ●
6 x 8	21KAKO08MPN
	21KAKO08MPN0 ●
	21KAKO08MPN3 ▲
	21KAKO08MPN6 ●
	21KAKO08MPN8 ●
4 x 6.3	21KAKO46MPN

21KAKS

Coupler with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
4 x 6	21KAKS06MPN
6 x 8	21KAKS08MPN

21KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
4	21KATF04MPN
	21KATF04MPN0 ●
	21KATF04MPN3 ▲
	21KATF04MPN6 ●
	21KATF04MPN8 ●
6	21KATF06MPN
	21KATF06MPN0 ●
	21KATF06MPN3 ▲
	21KATF06MPN6 ●
	21KATF06MPN8 ●
8	21KATF06MPN
	21KATF06MPN
	21KATF08MPN
	21KATF08MPN0 ●
	21KATF08MPN3 ▲
9	21KATF08MPN6 ●
	21KATF08MPN8 ●
	21KATF09MPN
10	21KATF09MPN3 ▲
	21KATF10MPN

21KARP

Coupler with valve, Push-In

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	21KARP06MPN
8	21KARP08MPN

21KATE

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
9	21KATE09MPN

21KATSCoupler with valve, Panel Mount
with Hose Barb

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
4	21KATS04MPN
	21KATS04MPN0 ●
	21KATS04MPN6 ●
	21KATS04MPN8 ●
5	21KATS05MPN
	21KATS06MPN
6	21KATS06MPN0 ●
	21KATS06MPN3 ▲
	21KATS06MPN6 ●
	21KATS06MPN8 ●
8	21KATS08MPN
10	21KATS10MPN

21KBAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM

Scan for more
dimensions

A	References
G1/8	21KBAW10MPN
	21KBAW10MPN0 ●
	21KBAW10MPN3 ▲
	21KBAW10MPN6 ●
	21KBAW10MPN8 ●
	21KBAW10MEN
	21KBAW10MVN
	21KBAW10MVN6 ●
	21KBAW13MPN
	21KBAW13MPN0 ●
G1/4	21KBAW13MPN3 ▲
	21KBAW13MPN8 ●
	21KBAW13MEN
	21KBAW13MVN
G3/8	21KBAW17MPN
	21KBAW17MEN
	21KBAW17MVN

21KBIM

Coupler with valve, Female Thread

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
M14 x 1.5	21KBIM14MPN

21KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM

Scan for more
dimensions

A	References
G1/8	21KBIW10MPN
	21KBIW10MPN3 ▲
	21KBIW10MVN
	21KBIW13MPN
G1/4	21KBIW13MEN
	21KBIW13MVN
G3/8	21KBIW17MPN
	21KBIW17MVN

21KBKKCoupler with valve, with Plastic
Hose Connection with Spring Guard

Nickel-plated brass, NBR, FKM

Scan for more
dimensions

A	References
4 x 6	21KBKK06MPN
	21KBKK06MVN
6 x 8	21KBKK08MPN

21KBKOCoupler with valve, with Plastic
Hose Connection

Nickel-plated brass, NBR, EPDM, FKM

Scan for more
dimensions

A	References
4 x 6	21KBKO06MPN
	21KBKO06MEN
6 x 8	21KBKO08MPN
	21KBKO08MVN

21KBKSCoupler with valve, Panel Mount
with Plastic Hose Connection

Nickel-plated brass, NBR, EPDM, FKM

Scan for more
dimensions

A	References
4 x 6	21KBKS06MPN
	21KBKS06MEN
	21KBKS06MVN
	21KBKS06MVN8 ●
6 x 8	21KBKS08MPN
	21KBKS08MEN
	21KBKS08MVN

21KBRP

Coupler with valve, Push-In

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
6	21KBRP06MPN
8	21KBRP08MPN

21KBTECoupler with valve, Panel Mount
with Hose Barb

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
6	21KBTE06MPN
9	21KBTE09MPN
10	21KBTE10MPN

21KBTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
4	21KBTF04MPN
5	21KBTF05MPN
	21KBTF05MVN
6	21KBTF06MPN
	21KBTF06MPN6 ●
	21KBTF06MEN
	21KBTF06MVN
8	21KBTF08MPN
	21KBTF08MVN
	21KBTF09MPN
9	21KBTF09MVN
	21KBTF09MVN6 ●
	21KBTF10MPN
10	21KBTF10MEN
	21KBTF10MVN

21KBTS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
	21KBTS04MPN
4	21KBTS04MPN0 ●
	21KBTS04MPN6 ●
5	21KBTS05MPN
6	21KBTS06MPN
	21KBTS06MVN
8	21KBTS08MPN
	21KBTS08MVN
10	21KBTS10MPN

21KFAW

Coupler without valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/8	21KFAW10MPN
G1/4	21KFAW13MPN

21KFIM

Coupler without valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M12x1.5	21KFIM12MPN

21KFIW

Coupler without valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/8	21KFIW10MPN
G1/4	21KFIW13MPN

21KFKK

Coupler without valve, with Plastic Hose Connection with Spring Guard

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21KFKK06MPN
6 x 8	21KFKK08MVN

21KFKO

Coupler without valve, with plastic hose connection

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21KFKO06MPN
	21KFKO06MVN
6 x 8	21KFKO08MPN

21KFKS

Coupler without valve, panel mount, with plastic hose connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
4 x 6	21KFKS06MPN
6 x 8	21KFKS08MPN

21KFTF

Coupler without valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
6	21KFTF06MPN
	21KFTF06MVN
8	21KFTF08MEN
	21KFTF08MPN
9	21KFTF09MPN

21SBAW

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SBAW10MPN
	21SBAW10MPN0 ●
	21SBAW10MPN3 ▲
	21SBAW10MPN6 ●
	21SBAW10MPN8 ●
	21SBAW10MEN
G1/4	21SBAW10MVN
	21SBAW13MPN
	21SBAW13MPN3 ▲
	21SBAW13MPN6 ●
	21SBAW13MEN
	21SBAW13MVN
G3/8	21SBAW17MPN
	21SBAW17MVN

21SBIM

Plug with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
M12 x 1.5	21SBIM12MPN
M14 x 1.5	21SBIM14MPN
M14 x 1.5	21SBIM14MVN

21SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SBIW10MPN
	21SBIW10MPN6 ●
	21SBIW10MEN
	21SBIW10MVN
	21SBIW10MVN6 ●
	21SBIW10MVN8 ●
G1/4	21SBIW13MPN
	21SBIW13MPN0 ●
	21SBIW13MVN
G3/8	21SBIW17MPN
	21SBIW17MVN

21SBKK

Plug with valve, with Plastic Hose Connection with Spring Guard

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21SBKK06MPN
	21SBKK06MVN
6 x 8	21SBKK08MPN

21SBKO

Plug with valve, with Plastic Hose Connection

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21SBKO06MPN
	21SBKO06MEN
	21SBKO06MVN
	21SBKO06MVN8 ●
6 x 8	21SBKO08MPN
	21SBKO08MPN0 ●
	21SBKO08MPN6 ●
	21SBKO08MPN8 ●
	21SBKO08MVN
	21SBKO08MVN8 ●

21SBKS

Plug with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21SBKS06MPN
	21SBKS06MVN
	21SBKS06MVN6 ●
6 x 8	21SBKS08MPN

21SBRP

Plug with valve, Push-In

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6 x 8	21SBRP08MPN

21SBTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
4	21SBTF04MPN
5	21SBTF05MPN
6	21SBTF06MPN
	21SBTF06MVN
8	21SBTF08MPN
	21SBTF08MVN
9	21SBTF09MPN
	21SBTF09MEN
	21SBTF09MVN
	21SBTF09MVN6 ●
	21SBTF10MPN
10	21SBTF10MEN
	21SBTF10MVN

21SBTS

Plug with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
5	21SBTS05MPN
6	21SBTS06MPN
	21SBTS06MVN
8	21SBTS08MPN
	21SBTS08MVN

21SFAF

Coupler without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
7/16 UNF	21SFAF11MXN

21SAW

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
	21SAW10MXN
	21SAW10MXN0 ●
G1/8	21SAW10MXN3 ▲
	21SAW10MXN6 ●
	21SAW10MXN8 ●
	21SAW13MXN
	21SAW13MXN0 ●
G1/4	21SAW13MXN3 ▲
	21SAW13MXN6 ●
	21SAW13MXN8 ●
G3/8	21SAW17MXN

21SFIM

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
M12 x 1.5	21SFIM12MXN
M14 x 1.5	21SFIM14MXN

21SFIW

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
	21SFIW10MXN
	21SFIW10MXN0 ●
G1/8	21SFIW10MXN3 ▲
	21SFIW10MXN6 ●
	21SFIW10MXN8 ●
	21SFIW13MXN
	21SFIW13MXN0 ●
G1/4	21SFIW13MXN3 ▲
	21SFIW13MXN6 ●
	21SFIW13MXN8 ●
G3/8	21SFIW17MXN

21SFKK

Plug without valve, Plastic Hose Connection with Spring Guard

Nickel-plated brass



Scan for more dimensions



A	References
4 x 6	21SFKK06MXN
6 x 8	21SFKK08MXN

21SFKO

Plug without valve, with Plastic Hose Connection

Nickel-plated brass



Scan for more dimensions



A	References
	21SFKO06MXN
	21SFKO06MXN0 ●
4 x 6	21SFKO06MXN3 ▲
	21SFKO06MXN6 ●
	21SFKO06MXN8 ●
	21SFKO08MXN
	21SFKO08MXN0 ●
6 x 8	21SFKO08MXN3 ▲
	21SFKO08MXN6 ●
	21SFKO08MXN8 ●
8 x 10	21SFKO10MXN

21SFKS

Plug without valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass



Scan for more dimensions



A	References
4 x 6	21SFKS06MXN
6 x 8	21SFKS08MXN

21SFRP

Plug without valve, Push-In

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	21SFRP06MPN
8	21SFRP08MPN

21SFTF

Plug without valve, Hose Barb



Nickel-plated brass

Scan for more
dimensions

A	References
4	21SFTF04MXN
	21SFTF04MXN0 ●
	21SFTF04MXN3 ▲
	21SFTF04MXN6 ●
	21SFTF04MXN8 ●
5	21SFTF05MXN
	21SFTF06MXN
6	21SFTF06MXN0 ●
	21SFTF06MXN3 ▲
	21SFTF06MXN6 ●
	21SFTF06MXN8 ●
8	21SFTF08MXN
9	21SFTF09MXN
10	21SFTF10MXN

21SFTSPlug without valve, Panel Mount
with Hose Barb

Nickel-plated brass

Scan for more
dimensions

A	References
4	21SFTS04MXN
6	21SFTS06MXN
	21SFTS06MXN0 ●
8	21SFTS08MXN

23KAAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	23KAAK13MPN
R3/8	23KAAK17MPN
R1/2	23KAAK21MPN

23KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	23KAAW13MPN
G3/8	23KAAW17MPN
G1/2	23KAAW21MPN

23KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	23KAIW13MPN
G3/8	23KAIW17MPN
G1/2	23KAIW21MPN

23KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	23KATF06MPN
8	23KATF08MPN
9	23KATF09MPN
10	23KATF10MPN

23SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFKO

Plug without valve, with Plastic Hose Connection

Nickel-plated steel



Scan for more dimensions



A	References
8 x 10	23SFKO10SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

18KAAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	18KAAK13MPN
R3/8	18KAAK17MPN
R1/2	18KAAK21MPN

18KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	18KAAW13MPN
G3/8	18KAAW17MPN

18KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	18KAIW13MPN
G3/8	18KAIW17MPN

18KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	18KATF06MPN
8	18KATF08MPN
10	18KATF10MPN

18SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/4	18SFAK13SXN

18SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	18SFAW13SXN
G3/8	18SFAW17SXN

18SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	18SFIW13SXN
G3/8	18SFIW17SXN

18SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions




A	References
6	18SFTF06SXN
8	18SFTF08SXN
10	18SFTF10SXN

22KAAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	22KAAK13MPN
R3/8	22KAAK17MPN
R1/2	22KAAK21MPN

22KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	22KAIW13MPN
G3/8	22KAIW17MPN
G1/2	22KAIW21MPN

22KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	22KATF06MPN
8	22KATF08MPN
10	22KATF10MPN

22SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	22SFAK10SXN
R1/4	22SFAK13SXN
R3/8	22SFAK17SXN
R1/2	22SFAK21SXN

22SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFAW13SXN
G1/2	22SFAW21SXN

22SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFIW13SXN
G3/8	22SFIW17SXN
G1/2	22SFIW21SXN

22SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	22SFTF06SXN
8	22SFTF08SXN
9	22SFTF09SXN
10	22SFTF10SXN
13	22SFTF13SXN

25KAAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
R1/4	25KAAK13MPN
	25KAAK13MVN
R3/8	25KAAK17MPN
R1/2	25KAAK21MPN
	25KAAK21MVN

25KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/4	25KAAW13MPN
	25KAAW13BPN0 ●
	25KAAW13BPN3 ▲
	25KAAW13BPN6 ●
	25KAAW13BPN8 ●
	25KAAW13MPN
	25KAAW13MEN
	25KAAW17BPN0 ●
G3/8	25KAAW17BPN3 ▲
	25KAAW17BPN6 ●
	25KAAW17BPN8 ●
	25KAAW17MPN
G1/2	25KAAW21BPN0 ●
	25KAAW21BPN3 ▲
	25KAAW21BPN6 ●
	25KAAW21BPN8 ●
	25KAAW21MPN

25KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	25KAIW13BPN0 ●
	25KAIW13BPN3 ▲
	25KAIW13BPN6 ●
	25KAIW13BPN8 ●
	25KAIW13MPN
G3/8	25KAIW17BPN0 ●
	25KAIW17BPN3 ▲
	25KAIW17BPN6 ●
	25KAIW17BPN8 ●
G1/2	25KAIW17MPN
	25KAIW21BPN0 ●
	25KAIW21BPN3 ▲
	25KAIW21BPN6 ●
	25KAIW21BPN8 ●
	25KAIW21MPN

25KAKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
8 x 10	25KAKO10MPN
9 x 12	25KAKO12MPN

25KATE

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
19	25KATE19MPN

25KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
6	25KATF06MPN
	25KATF06BPN0 ●
	25KATF06BPN3 ▲
	25KATF06BPN6 ●
8	25KATF06BPN8 ●
	25KATF08MPN
	25KATF08MVN
	25KATF09MPN
9	25KATF09BPN0 ●
	25KATF09BPN3 ▲
	25KATF09BPN6 ●
	25KATF09BPN8 ●
10	25KATF09MEN
	25KATF10MPN
	25KATF10MVN
	25KATF13MPN
13	25KATF13BPN0 ●
	25KATF13BPN3 ▲
	25KATF13BPN6 ●
	25KATF13BPN8 ●
	25KATF13MVN

25KATS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
8	25KATS08MPN
10	25KATS10MPN

25KBAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
R1/4	25KBAK13MPN
	25KBAK13MVN
R3/8	25KBAK17MPN
	25KBAK21MPN
R1/2	25KBAK21MVN

25KBAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/4	25KBAW13MPN
	25KBAW13BVN8 ●
	25KBAW13MVN
	25KBAW17MPN
G3/8	25KBAW17BPN0 ●
	25KBAW17BPN3 ▲
	25KBAW17BPN6 ●
	25KBAW17BPN8 ●
	25KBAW17MEN
	25KBAW17MVN
G1/2	25KBAW21MPN

25KBIM

Coupler with valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
M14x1.5	25KBIM14MPN
M16x1.5	25KBIM16MPN
M18x1.5	25KBIM18MPN
	25KBIM18MVN

25KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25KBIW13MPN
	25KBIW13MEN
	25KBIW13MVN
	25KBIW13BPN0 ●
	25KBIW13BPN3 ▲
	25KBIW13BPN6 ●
	25KBIW13BPN8 ●
	25KBIW13BEN6
G3/8	25KBIW13BVN6 ●
	25KBIW17MPN
	25KBIW17MVN
	25KBIW17BPN0 ●
G1/2	25KBIW21MPN
	25KBIW21MEN
	25KBIW21MVN
	25KBIW21BPN3 ▲

25KBKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6 x 8	25KBKO08MPN
8 x 10	25KBKO10MPN
9 x 12	25KBKO12MPN

25KBTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
6	25KBTF06MPN
8	25KBTF08MPN
9	25KBTF09MPN
	25KBTF09MEN
	25KBTF09MVN
	25KBTF10MPN
10	25KBTF10MEN
	25KBTF10MVN
	25KBTF13MPN
	25KBTF13MEN
13	25KBTF13BEN8 ●
	25KBTF13MVN

25KBTS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
8	25KBTS08MPN
10	25KBTS08MVN
	25KBTS10MPN

25KFAK

Coupler without valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R3/8	25KFAK17MPN

25KFAW

Coupler without valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/8	25KFAW10MPN
G1/4	25KFAW13MPN
	25KFAW13MVN
G3/8	25KFAW17MPN
	25KFAW17MVN
G1/2	25KFAW21MPN
	25KFAW21MVN

25KFIW

Coupler without valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/4	25KFIW13MPN
	25KFIW13MVN
G3/8	25KFIW17MPN
	25KFIW17MVN
G1/2	25KFIW21MPN

25KFTF

Coupler without valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	25KFTF06MPN
9	25KFTF09MPN
10	25KFTF10MPN
13	25KFTF13MPN

25SBIM

Plug with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
M14x1	25SBIM14MPN
M18x1.5	25SBIM18MPN

25SBKO

Plug with valve, with Plastic Hose Connection

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6 x 8	25SBKO08MPN
8 x 10	25SBKO10MPN
9 x 12	25SBKO12MPN

25SFAK

Plug without valve, Male Thread

Zinc plated steel



Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SBAK

Plug with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R3/8	25SBAK17MPN
R1/2	25SBAK21MPN

25SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
	25SBIW13MPN
	25SBIW13MPN0 ●
	25SBIW13MPN3 ▲
G1/4	25SBIW13MPN6 ●
	25SBIW13MPN8 ●
	25SBIW13MVN
	25SBIW13MVN6 ●
G3/8	25SBIW17MPN
	25SBIW21MPN
G1/2	25SBIW21MPN6 ●

25SBTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
	25SBTF06MPN
	25SBTF06MPN3 ▲
6	25SBTF06MPN6 ●
	25SBTF06MVN
8	25SBTF08MPN
	25SBTF09MPN
9	25SBTF09MPN0 ●
	25SBTF09MPN3 ▲
	25SBTF09MEN
	25SBTF10MPN
10	25SBTF10MEN
	25SBTF10MVN
13	25SBTF13MPN

25SBAW

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
	25SBAW10MPN
G1/8	25SBAW10MXN
	25SBAW13MPN
G1/4	25SBAW13MEN
	25SBAW13MEN8 ●
	25SBAW13MVN
	25SBAW17MPN
	25SBAW17MPN0 ●
G3/8	25SBAW17MPN3 ▲
	25SBAW17MPN6 ●
	25SBAW17MPN8 ●
	25SBAW17MVN
	25SBAW21MPN
	25SBAW21MPN8 ●
G1/2	25SBAW21MEN
	25SBAW21MEN6 ●
	25SBAW21MEN8 ●
	25SBAW21MVN

25SBTS

Plug with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
	25SBTS08MPN
8	25SBTS08MVN
	25SBTS10MPN
10	25SBTS10MVN

25SAW

Plug without valve, Male Thread

Zinc plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SAW10SXZ
	25SAW10MXN
	25SAW13SXZ
	25SAW13MXN
G1/4	25SAW13MXN0 ●
	25SAW13MXN3 ▲
	25SAW13MXN6 ●
	25SAW13MXN8 ●
	25SAW17SXZ
G3/8	25SAW17MXN
	25SAW17MXN0 ●
	25SAW17MXN3 ▲
	25SAW17MXN6 ●
	25SAW17MXN8 ●
G1/2	25SAW21SXZ
	25SAW21MXN
	25SAW21MXN6 ●

25SFM

Plug without valve, Female Thread

Zinc plated steel/Nickel-plated brass



Scan for more dimensions



A	References
M14x1.5	25SFM14MXN
M16x1.5	25SFM16SXZ
	25SFM16MXN

25SFIW

Plug without valve, Female Thread

Zinc plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
	25SFIW10MXN
	25SFIW13SXZ
	25SFIW13MXN
G1/4	25SFIW13MXN0 ●
	25SFIW13MXN3 ▲
	25SFIW13MXN6 ●
	25SFIW13MXN8 ●
	25SFIW17SXZ
G3/8	25SFIW17MXN
	25SFIW17MXN0 ●
	25SFIW17MXN3 ▲
	25SFIW17MXN6 ●
	25SFIW17MXN8 ●
G1/2	25SFIW21SXZ
	25SFIW21MXN

25SFKK

Plug without valve, Plastic Hose Connection with Spring Guard

Nickel-plated brass



Scan for more dimensions



A	References
4 x 6	25SFKK06MXN
6 x 8	25SFKK08MXN
8 x 10	25SFKK10MXN
9 x 12	25SFKK12MXN

25SFKO

Plug without valve, with Plastic Hose Connection

Nickel-plated brass



Scan for more dimensions



A	References
4 x 6	25SFKO06MXN
6 x 8	25SFKO08MXN
8 x 10	25SFKO10MXN
9 x 12	25SFKO12MXN

25SFTF

Plug without valve, Hose Barb

Zinc plated steel/Nickel-plated brass



Scan for more dimensions



A	References
4	25SFTF04MXN
	25SFTF06SXZ
	25SFTF06MXN
6	25SFTF06MXN0 ●
	25SFTF06MXN3 ▲
	25SFTF06MXN6 ●
	25SFTF06MXN8 ●
8	25SFTF08SXZ
	25SFTF08MXN
	25SFTF09SXZ
9	25SFTF09MXN
	25SFTF09MXN0 ●
	25SFTF09MXN3 ▲
	25SFTF09MXN6 ●
	25SFTF09MXN8 ●
10	25SFTF10SXZ
	25SFTF10MXN
13	25SFTF13SXZ
	25SFTF13MXN

25SFTS

Plug without valve, Panel Mount with Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
8	25SFTS08MXN
10	25SFTS10MXN

30KAAW

Coupler with valve, Male Thread

Nickel-plated steel, NBR



Scan for more dimensions



A	References
G1/4	30KAAW13SPN
G3/8	30KAAW17SPN
G1/2	30KAAW21SPN

30KAIW

Coupler with valve, Female Thread

Nickel-plated steel, NBR



Scan for more dimensions



A	References
G1/4	30KAIW13SPN
G3/8	30KAIW17SPN
G1/2	30KAIW21SPN

30KATF

Coupler with valve, Hose Barb

Nickel-plated steel, NBR



Scan for more dimensions



A	References
8	30KATF08SPN
10	30KATF10SPN
13	30KATF13SPN

30SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	30SFAW13SXN
G3/8	30SFAW17SXN
G1/2	30SFAW21SXN

30SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	30SFIW13SXN
G3/8	30SFIW17SXN
G1/2	30SFIW21SXN

30SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
8	30SFTF08SXN
10	30SFTF10SXN
13	30SFTF13SXN

40KAIW**Coupler with valve, Female Thread***Nickel-plated brass, NBR*Scan for more
dimensions

A	References
G3/8	40KAIW17MPN
G1/2	40KAIW21MPN

40SFAK**Plug without valve, Male Thread***Nickel-plated steel*Scan for more
dimensions

A	References
R3/8	40SFAK17SXN
R1/2	40SFAK21SXN

40SFIW**Plug without valve, Female Thread***Nickel-plated steel*Scan for more
dimensions

A	References
G3/8	40SFIW17SXN
G1/2	40SFIW21SXN

40SFTF**Plug without valve, Hose Barb***Nickel-plated steel*Scan for more
dimensions

A	References
10	40SFTF10SXN
13	40SFTF13SXN

27KAAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	27KAAK13MPN
R3/8	27KAAK17MPN
R1/2	27KAAK21MPN
R3/4	27KAAK26MPN

27KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G3/8	27KAAW17MPN
G1/2	27KAAW21MPN

27KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/4	27KAIW13MPN
G3/8	27KAIW17MPN
G1/2	27KAIW21MPN
	27KAIW21MVN
G3/4	27KAIW26MPN

27KATF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
9	27KATF09MPN
10	27KATF10MPN
13	27KATF13MPN
	27KATF13MVN
16	27KATF16MPN
19	27KATF19MPN

27KBAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
R1/4	27KBAK13MPN
	27KBAK17MPN
R3/8	27KBAK17BPN
	27KBAK17MEN
	27KBAK17MVN
R1/2	27KBAK21MPN
	27KBAK21MVN
R3/4	27KBAK26MPN
	27KBAK26BPN

27KBAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G3/8	27KBAW17MPN
G1/2	27KBAW21MPN
G3/4	27KBAW26MPN

27KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
	27KBIW13MPN
G1/4	27KBIW13MEN
	27KBIW13MVN
	27KBIW17MPN
G3/8	27KBIW17MEN
	27KBIW17MVN
	27KBIW21MPN
G1/2	27KBIW21MEN
	27KBIW21MVN
	27KBIW26MPN
G3/4	27KBIW26MEN
	27KBIW26MVN

27KBTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
8	27KBTF08MPN
9	27KBTF09MPN
10	27KBTF10MPN
	27KBTF13MPN
13	27KBTF13MEN
	27KBTF13MVN
	27KBTF16MPN
16	27KBTF16MVN
19	27KBTF19MPN

27KFAK

Coupler without valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
R1/4	27KFAK13MPN
R3/8	27KFAK13MVN
R1/2	27KFAK21MVN
R3/4	27KFAK26MEN

27KFAW

Coupler without valve, Male Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G3/8	27KFAW17MPN
G1/2	27KFAW21MVN

27KFIW

Coupler without valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G3/8	27KFIW17MPN
	27KFIW17MVN
G1/2	27KFIW21MPN
G3/4	27KFIW26MPN

27KFTF

Coupler without valve, Hose Barb

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
10	27KFTF10MEN
13	27KFTF13MPN

27SBAK

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
R1/4	27SBAK13MPN
R3/8	27SBAK17MPN
	27SBAK21MPN
R1/2	27SBAK21MEN
	27SBAK21MVN
R3/4	27SBAK26MPN

27SBAW

Plug with valve, Male Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
G3/8	27SBAW17MPN
	27SBAW21MEN
G1/2	27SBAW21MPN

27SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27SBIW13MPN
	27SBIW17MPN
G3/8	27SBIW17MEN
	27SBIW17MVN
	27SBIW21MPN
G1/2	27SBIW21MEN
	27SBIW21MVN
G3/4	27SBIW26MPN
	27SBIW26MVN

27SBTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
8	27SBTF08MPN
9	27SBTF09MPN
10	27SBTF10MPN
	27SBTF10MVN
13	27SBTF13MPN
	27SBTF13MVN
16	27SBTF16MPN
	27SBTF19MPN
19	27SBTF19MVN

27SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/4	27SFAK13SXN
R3/8	27SFAK17SXN
R1/2	27SFAK21SXN
R3/4	27SFAK26SXN

27SFAW

Plug without valve, Male Thread

Nickel-plated brass / Nickel-plated steel



Scan for more dimensions



A	References
G1/4	27SFAW13MXN
G3/8	27SFAW17SXN
G1/2	27SFAW21SXN
G3/4	27SFAW26SXN

27SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	27SFIW13SXN
G3/8	27SFIW17SXN
G1/2	27SFIW21SXN
G3/4	27SFIW26SXN

27SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
10	27SFTF10SXN
13	27SFTF13SXN
16	27SFTF16SXN
19	27SFTF19SXN

37KAAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
G1/2	37KAAW21MPN
G3/4	37KAAW26MPN

37KAIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
G1/2	37KAIW21MPN
G3/4	37KAIW26MPN

37KATF

Coupler without valve, Hose Barb

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
10	37KATF10MPN
16	37KATF16MPN
19	37KATF19MPN

37SFAK

Plug without valve, Male Thread

Nickel-plated steel

Scan for more
dimensions

A	References
R1/2	37SFAK21SXN
R3/4	37SFAK26SXN

37SFAW

Plug without valve, Male Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G3/8	37SFAW17SXN
G1/2	37SFAW21SXN

37SFIT

Plug without valve, Female Thread

Nickel-plated steel

Scan for more
dimensions

A	References
3/8 NPT	37SFIT17SXN

37SFIW

Plug without valve, Female Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G1/2	37SFIW21SXN
G3/4	37SFIW26SXN

37SFTF

Plug without valve, Hose Barb

Nickel-plated steel

Scan for more
dimensions

A	References
10	37SFTF10SXN
13	37SFTF13SXN
16	37SFTF16SXN
19	37SFTF19SXN

75KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



Size	A	References
3/4"	G3/4	75KBIW26MPN

75SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



Size	A	References
3/4"	G3/4	75SBIW26MPN

38KBAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/2	38KBAW21MPN
G3/4	38KBAW26MPN
G1	38KBAW33MPN

38KBIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
G1/2	38KBIW21MPN
G3/4	38KBIW26MPN
	38KBIW26MEN
G1	38KBIW33MPN

38KBTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
13	38KBTF13MPN
16	38KBTF16MPN
19	38KBTF19MPN
25	38KBTF25MPN

38SBAW

Plug with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/2	38SBAW21MPN
G3/4	38SBAW26MPN
G1	38SBAW33MPN

38SBIW

Plug with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/2	38SBIW21MPN
G3/4	38SBIW26MPN
G1	38SBIW33MPN

38SBTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
13	38SBTF13MPN
19	38SBTF19MPN
25	38SBTF25MPN

38SFAW

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/2	38SFAW21MXN
G3/4	38SFAW26MXN
G1	38SFAW33MXN

38SFIW

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/2	38SFIW21MXN
G3/4	38SFIW26MXN
G1	38SFIW33MXN

38SFTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
13	38SFTF13MXN
19	38SFTF19MXN
25	38SFTF25MXN

39KBAW

Coupler with valve, Male Thread



Nickel-plated brass, NBR

Scan for more dimensions



A	References
G3/4	39KBAW26MPN
G1	39KBAW33MPN

39KBIW

Coupler with valve, Female Thread



Nickel-plated brass, NBR

Scan for more dimensions



A	References
G3/4	39KBIW26MPN
G1	39KBIW33MPN

39KBTF

Coupler with valve, Hose Barb



Nickel-plated brass, NBR

Scan for more dimensions



A	References
19	39KBTF19MPN
25	39KBTF25MPN

39SBAW

Plug with valve, Male Thread



Nickel-plated brass, NBR

Scan for more dimensions



A	References
G3/4	39SBAW26MPN

39SBIW

Plug with valve, Female Thread



Nickel-plated brass, NBR

Scan for more dimensions



A	References
G1	39SBIW33MPN

39SFIW

Plug without valve, Female Thread



Nickel-plated brass

Scan for more dimensions



A	References
G1	39SFIW33MXN



Made of stainless steel, this range of **Rectus couplers** is the most suitable metal solution for corrosive environments. It is also ideal for applications with treated water, regardless of the external environment.

Technical specifications



Fluids: compressed air, neutral gases, industrial water and treated water with or without glycol



Operating pressure: up to 35 bar (100 to 250 bar for the 70 series)



Operating temperature: -15°C to +200°C




Functions: KA, KB, KF



Regulations: RoHS, REACH

Components materials

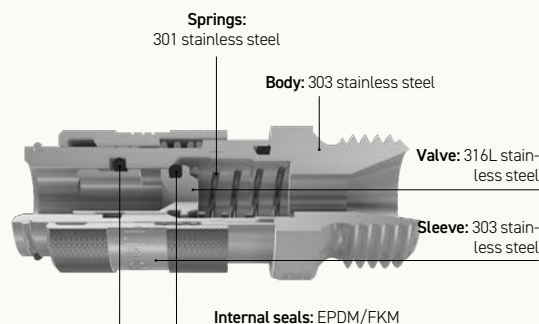

Nominal diameter (mm)	Profile	Flow rate (NL/min)*		Series coupler	Plugs series
		Air 	Water 		
2.7	EURO	130 (KB) to 165 (KA)	1.2 (KB) to 1.5 (KA)	20	20
3	ISO C	160 (KB)	2.2 (KB)	303	303
5	EURO	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21	21
5	Rectus	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21 coded	21 coded
7.4	EURO	710 (KB) to 1800 (KA)	7.1 (KB) to 28 (KA)	25	25
10	EURO	950 (KB) to 2400 (KA)	14 (KB) to 31 (KA)	27	27
4.3-20	ISO 7241-1 B	-	6 (KB)	71	71
			9 (KB)	72	72
			17 (KB)	73	73
			33 (KB)	74	74
			79 (KB)	75	75
			117 (KB)	76	76


* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Identification of coded versions



Recommended applications

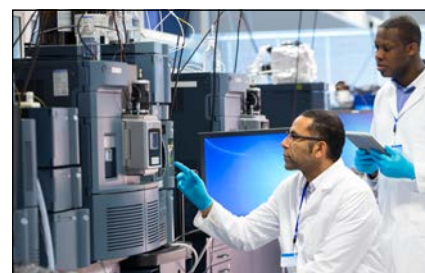

Ideal level of cleanliness in laboratories



Compatibility with process water

Benefits

- **Fully stainless steel design in 303 or 316L** with FKM seal to withstand corrosive external environments while maintaining fluid integrity.
- **Available with EPDM** seals for conveying treated water (deionised, demineralised, pure).
- **Ideal for applications requiring a high level of cleanliness** and using aggressive or corrosive cleaning products (medical & analysis, food processing machinery, etc.)
- **The 70 series stands out for its high flow rate**, high pressure resistance and low pressure drop.

20KA AF

Coupler with valve, Male Thread

Stainless steel 303, FKM



Scan for more dimensions



A	References
10-32 UNF	20KA AF05RVX

20KA AM

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
M5	20KA AM05RVX
	20KA AM05EEX
	20KA AM05EVX

20KA AW

Coupler with valve, Male Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	20KA AW10RVX
G1/8	20KA AW10EVX

20KA IM

Coupler with valve, Female Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
M5	20KA IM05EVX
M6	20KA IM06EVX

20KA IW

Coupler with valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	20KA IW10RVX
G1/8	20KA IW10EVX

20KA KO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
3 x 4	20KA KO04RVX
	20KA KO04EVX
3 x 5	20KA KO05EVX
	20KA KO06REX
	20KA KO06RVX
4 x 6	20KA KO06EVX

20KA KS

Coupler with valve, with Plastic Hose Connection

Stainless steel 303, FKM



Scan for more dimensions



A	References
3 x 4	20KA KS04RVX
3 x 5	20KA KS05RVX
4 x 6	20KA KS06RVX

20KA TF

Coupler with valve, Hose Barb

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
4	20KA TF04RVX
4	20KA TF04EVX
5	20KA TF05RVX

20KB AM

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
M5	20KB AM05RVX
	20KB AM05EEX
	20KB AM05EVX

20KB AW

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
	20KB AW10RVX
G1/8	20KB AW10EEX
	20KB AW10EVX

20KB IM

Coupler with valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
M5	20KB IM05RVX
M5	20KB IM05EVX

20KB IW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
	20KB IW10RVX
G1/8	20KB IW10EEX
	20KB IW10EVX

20KBKO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
3 x 4	20KBKO04REX
	20KBKO04RVX
	20KBKO04EVX
4 x 6	20KBKO06RVX
	20KBKO06EVX

20KBKS

Coupler with valve, with Plastic Hose Connection

Stainless steel 303, EPDM, FKM



Scan for more dimensions



A	References
3 x 4	20KBKS04RVX
3 x 5	20KBKS05RVX
4 x 6	20KBKS06REX
	20KBKS06RVX

20KBTF

Coupler with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4	20KBTF04RVX
	20KBTF04EEX
	20KBTF04EVX
5	20KBTF05RVX

20SBAM

Plug with valve, Male Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
M5	20SBAM05RVX
M5	20SBAM05EVX

20SBAW

Plug with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	20SBAW10REX
	20SBAW10RVX
	20SBAW10EEX
	20SBAW10EVX

20SBIM

Plug with valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
M5	20SBIM05RVX
	20SBIM05EVX

20SBIW

Plug with valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	20SBIW10RVX
G1/8	20SBIW10EVX

20SBKO

Plug with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
3 x 4	20SBKO04REX
	20SBKO04RVX
	20SBKO04EVX
3 x 5	20SBKO05EVX
	20SBKO06REX
4 x 6	20SBKO06RVX
	20SBKO06EVX

20SBKS

Plug with valve, Panel Mount with Plastic Hose Connection

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
3 x 4	20SBKS04RVX
4 x 6	20SBKS06RVX
	20SBKS06EVX

20SBTF

Plug with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4	20SBTF04RVX
4	20SBTF04EEX
4	20SBTF04EVX
5	20SBTF05RVX

20SFAM

Plug without valve, Male Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
M5	20SFAM05RXX
M5	20SFAM05EXX

20SFAW

Plug without valve, Male Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/8	20SFAW10RXX
G1/8	20SFAW10EXX

20SFIM

Plug without valve, Female Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
M5	20SFIM05RXX
M5	20SFIM05EXX

20SFIW

Plug without valve, Female Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/8	20SFIW10RXX
G1/8	20SFIW10EXX

20SFKO

Plug without valve, with Plastic Hose Connection

Stainless steel 303/316L



Scan for more dimensions



A	References
3 x 4	20SFKO04RXX
3 x 4	20SFKO04EXX
3 x 5	20SFKO05RXX
3 x 5	20SFKO05EXX
4 x 6	20SFKO06RXX
4 x 6	20SFKO06EXX

20SFKS

Plug without valve, Panel Mount with Plastic Hose Connection

Stainless steel 303



Scan for more dimensions



A	References
4 x 6	20SFKS06RXX

20SFTF

Plug without valve, Hose Barb

Stainless steel 303/316L



Scan for more dimensions



A	References
3	20SFTF03RXX
	20SFTF03EXX
4	20SFTF04RXX
	20SFTF04EXX
5	20SFTF05RXX

303KBAW

Coupler with valve, Male Thread

Stainless steel 316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	303KBAW10EVX
G1/4	303KBAW13EEX
	303KBAW13EVX

303KBIW

Coupler with valve, Female Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/8	303KBIW10EVX
G1/4	303KBIW13EVX

303KCKO

Coupler with valve, with Plastic Hose Connection

Stainless steel 316L, FKM



Scan for more dimensions



A	References
4 x 6	303KCKO06EVX
6 x 8	303KCKO08EVX

303KCTF

Coupler with valve, Hose Barb

Stainless steel 316L, FKM



Scan for more dimensions



A	References
6	303KCTF06EVX

303SBAW

Plug with valve, Male Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/8	303SBAW10EVX
G1/4	303SBAW13EVX

303SBIW

Plug with valve, Female Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/8	303SBIW10EVX
G1/4	303SBIW13EVX

303SBKO

Plug with valve, with Plastic Hose Connection

Stainless steel 316L, FKM



Scan for more dimensions



A	References
4 x 6	303SBKO06EVX
6 x 8	303SBKO08EVX

303SBTF

Plug with valve, Hose Barb

Stainless steel 316L, FKM



Scan for more dimensions



A	References
6	303SBTF06EVX

21KAAM

Coupler with valve, Male Thread

Stainless steel 303, FKM



Scan for more dimensions



A	References
M12x1.5	21KAAM12RVX

21KAAW

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KAAW10RVX
	21KAAW10RVX3 ▲
	21KAAW10RVX8 ●
	21KAAW10EEX
	21KAAW10EVX
G1/4	21KAAW13RVX
	21KAAW13RVX0 ●
	21KAAW13RVX8 ●
	21KAAW13EVX
G3/8	21KAAW17RVX
	21KAAW17EVX

21KAIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KAIW10RVX
	21KAIW10RVX6 ●
	21KAIW10RVX8 ●
	21KAIW10EEX
	21KAIW10EVX
G1/4	21KAIW13RVX
	21KAIW13EVX
G3/8	21KAIW17RVX
	21KAIW17EVX

21KAKO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21KAKO06RVX
	21KAKO06EEX
	21KAKO06EVX
6 x 8	21KAKO08RVX
	21KAKO08RVX0 ●
	21KAKO08EVX

21KAKS

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
4 x 6	21KAKS06RVX
	21KAKS06EVX
6 x 8	21KAKS08RVX

21KATF

Coupler with valve, Hose Barb

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
4	21KATF04RVX
4	21KATF04EVX
6	21KATF06RVX
6	21KATF06EVX
8	21KATF08RVX
8	21KATF08EVX
9	21KATF09RVX
9	21KATF09EVX
10	21KATF10RVX
10	21KATF10EVX

21KATS

Coupler with valve, Panel Mount with Hose Barb

Stainless steel 303, FKM



Scan for more dimensions



A	References
6	21KATS06RVX

21KBAW

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KBAW10REX
	21KBAW10REX0
	21KBAW10REX3 ▲
	21KBAW10REX6 ●
	21KBAW10REX8 ●
G1/4	21KBAW10RVX
	21KBAW10EEX
	21KBAW10EVX
	21KBAW13REX
	21KBAW13RVX
G3/8	21KBAW13EEX
	21KBAW13EVX
	21KBAW17RVX
	21KBAW17EVX

21KBIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KBIW10REX
	21KBIW10RVX
	21KBIW10EEX
	21KBIW10EVX
	21KBIW13REX
G1/4	21KBIW13RVX
	21KBIW13EEX
	21KBIW13EVX
G3/8	21KBIW17RVX
G3/8	21KBIW17EVX

21KBKK

Coupler with valve, with Plastic Hose Connection with Spring Guard

Stainless steel 303, EPDM, FKM



Scan for more dimensions



A	References
6 x 8	21KBKK08REX
	21KBKK08RVX

21BKBO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21BKBO06REX
	21BKBO06RVX
	21BKBO06RVX6 ●
	21BKBO06RVX8 ●
	21BKBO06EEX
	21BKBO06EVX
6 x 8	21BKBO08RVX
	21BKBO08RVX0 ●
	21BKBO08RVX6 ●
	21BKBO08RVX8 ●
	21BKBO08EEX
	21BKBO08EVX

21KBKS

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21KBKS06REX
	21KBKS06RVX
	21KBKS06EVX
6 x 8	21KBKS08REX
	21KBKS08RVX
	21KBKS08EEX

21KBTF

Coupler with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4	21KBTF04RVX
	21KBTF04EVX
	21KBTF06REX
6	21KBTF06RVX
	21KBTF06EVX
	21KBTF08REX
8	21KBTF08RVX
	21KBTF08EEX
	21KBTF08EVX
9	21KBTF09RVX
	21KBTF09EEX
	21KBTF09EVX
10	21KBTF10RVX
	21KBTF10EVX

21KBTS

Coupler with valve, Panel Mount with Hose Barb

Stainless steel 303, FKM



Scan for more dimensions



A	References
6	21KBTS06RVX
8	21KBTS08RVX

21KFAW

Coupler without valve, Male Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	21KFAW10RVX
G1/4	21KFAW13EVX
G3/8	21KFAW17RVX

21SBAW

Plug with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SBAW10REX
	21SBAW10REX3 ▲
	21SBAW10REX6 ●
	21SBAW10REX8 ●
	21SBAW10RVX
	21SBAW10RVX6 ●
	21SBAW10RVX8 ●
	21SBAW10EEX
	21SBAW10EVX
	21SBAW13REX
	21SBAW13RVX
	21SBAW13EEX
G1/4	21SBAW13EVX
	21SBAW17RVX
	21SBAW17EVX

21KFTF

Coupler without valve, Hose Barb

Stainless steel 316L, FKM



Scan for more dimensions



A	References
4	21KFTF04EVX
6	21KFTF06EVX
9	21KFTF09EVX

21KFIW

Coupler without valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	21KFIW10RVX6 ●
G1/4	21KFIW13EVX

21SBIW

Plug with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SBIW10REX
	21SBIW10RVX
	21SBIW10EEX
	21SBIW10EVX
G1/4	21SBIW13REX
	21SBIW13RVX
	21SBIW13EEX
	21SBIW13EVX
G3/8	21SBIW17RVX
	21SBIW17EVX

21SBKK

Plug with valve, Plastic Hose Connection with Spring Guard

Stainless steel 303, FKM



Scan for more dimensions



A	References
6 x 8	21SBKK08RVX

21SBKO

Plug with valve, with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21SBKO06REX
	21SBKO06RVX
	21SBKO06EEX
	21SBKO06EVX
6 x 8	21SBKO08RVX
	21SBKO08RVX6 ●
	21SBKO08RVX8 ●
	21SBKO08EVX

21SBKS

Plug with valve, Panel Mount with Plastic Hose Connection

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21SBKS06REX
	21SBKS06RVX
	21SBKS06EEX
	21SBKS08RVX

21SBTF

Plug with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
4	21SBTF04RVX
6	21SBTF06REX
	21SBTF06RVX
	21SBTF06EVX
8	21SBTF08REX
	21SBTF08RVX
	21SBTF08EEX
9	21SBTF09RVX
	21SBTF09EVX
10	21SBTF10RVX
	21SBTF10EEX
	21SBTF10EVX

21SBTS

Plug with valve, Panel Mount with Hose Barb

Stainless steel 303, FKM



Scan for more dimensions



A	References
6	21SBTS06RVX

21SFAW

Plug without valve, Male Thread

Stainless steel 303



Scan for more dimensions



A	References
M12x1.5	21SFAW12RXX

21SFAW

Plug without valve, Male Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/8	21SFAW10RXX
	21SFAW10EXX
	21SFAW13RXX
G1/4	21SFAW13RXX0 ●
	21SFAW13RXX3 ▲
	21SFAW13RXX8 ●
	21SFAW13EXX
G3/8	21SFAW17RXX

21SFIM

Plug without valve, Female Thread

Stainless steel 316L



Scan for more dimensions




A	References
M14x1.5	21SFIM14EXX

21SFKO

Plug without valve, with Plastic Hose Connection

Stainless steel 303/316L



Scan for more dimensions



A	References
4 x 6	21SFKO06RXX
	21SFKO06RXX8 ●
	21SFKO06EXX
6 x 8	21SFKO08RXX
	21SFKO08EXX

21SFIW

Plug without valve, Female Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/8	21SFIW10RXX
	21SFIW10RXX6 ●
	21SFIW10EXX
G1/4	21SFIW13RXX
	21SFIW13EXX
G3/8	21SFIW17RXX

21SFKS

Plug without valve, Panel Mount with Plastic Hose Connection

Stainless steel 303/316L



Scan for more dimensions



A	References
4 x 6	21SFKS06RXX
	21SFKS06EXX

21SFTF

Plug without valve, Hose Barb

Stainless steel 303/316L



Scan for more dimensions



A	References
4	21SFTF04RXX
	21SFTF04EXX
6	21SFTF06RXX
	21SFTF06EXX
8	21SFTF08RXX
	21SFTF08EXX
9	21SFTF09RXX
	21SFTF09EXX
10	21SFTF10RXX
	21SFTF10EXX

25KAAW

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25KAAW13RVX
	25KAAW13EVX
	25KAAW17REX
G3/8	25KAAW17RVX
	25KAAW17EVX
G1/2	25KAAW21RVX
	25KAAW21EVX

25KAIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25KAIW13RVX
G1/4	25KAIW13EEX
G1/4	25KAIW13EVX
G3/8	25KAIW17RVX
G3/8	25KAIW17EEX
G3/8	25KAIW17EVX
G1/2	25KAIW21RVX
G1/2	25KAIW21EVX

25KAKO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
6 x 8	25KAKO08RVX
	25KAKO08EVX
8 x 10	25KAKO10RVX
9 x 12	25KAKO12EVX

25KATF

Coupler with valve, Hose Barb

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
6	25KATF06RVX
6	25KATF06EVX
8	25KATF08RVX
8	25KATF08EVX
9	25KATF09RVX
9	25KATF09EVX
10	25KATF10RVX
10	25KATF10EVX
13	25KATF13RVX
13	25KATF13EVX

25KBAW

Coupler with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25KBAW13RVX
	25KBAW13EEX
	25KBAW13EVX
G3/8	25KBAW17RVX
	25KBAW17EEX
	25KBAW17EVX
G1/2	25KBAW21RVX
	25KBAW21EEX
	25KBAW21EVX

25KBIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25KBIW13RVX
	25KBIW13REX
	25KBIW13EEX
	25KBIW13EVX
G3/8	25KBIW17RVX
	25KBIW17REX
	25KBIW17EVX
G1/2	25KBIW21RVX
	25KBIW21EEX
	25KBIW21EVX

25KBKO

Coupler with valve, with Plastic Hose Connection

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
6 x 8	25KBKO08RVX
	25KBKO08EVX
8 x 10	25KBKO10RVX
9 x 12	25KBKO12RVX
	25KBKO12EVX

25KBTF

Coupler with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
6	25KBTF06EVX
	25KBTF08REX
8	25KBTF08RVX
	25KBTF08EEX
	25KBTF08EVX
9	25KBTF09EVX
10	25KBTF10RVX
	25KBTF10REX
	25KBTF10EVX
13	25KBTF13RVX
	25KBTF13EVX

25KFAW

Coupler without valve, Male Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/2	25KFAW21EVX

25KFIW

Coupler without valve, Female Thread

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
G1/8	25KFIW10RVX
G1/2	25KFIW21EVX

25KFTF

Coupler without valve, Hose Barb

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
6	25KFTF06RVX
8	25KFTF08EVX
10	25KFTF10EVX

25SBAK

Plug with valve, Male Thread

Stainless steel 303, EPDM



Scan for more dimensions



A	References
R1/8	25SBAK10REX

25SBAW

Plug with valve, Male Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25SBAW13REX
	25SBAW13RVX
	25SBAW13EEX
	25SBAW13EVX
G3/8	25SBAW17RVX
	25SBAW17EEX
	25SBAW17EVX
	25SBAW21RVX
G1/2	25SBAW21EEX
	25SBAW21EVX

25SBIW

Plug with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25SBIW13REX
	25SBIW13RVX
	25SBIW13EEX
	25SBIW13EVX
G3/8	25SBIW17REX
	25SBIW17RVX
	25SBIW17EVX
	25SBIW21RVX
G1/2	25SBIW21EEX
	25SBIW21EVX

25SBKO

Plug with valve, with Plastic Hose Connection

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
6 x 8	25SBKO08RVX
	25SBKO08EVX
8 x 10	25SBKO10RVX
9 x 12	25SBKO12RVX
	25SBKO12EVX

25SBTF

Plug with valve, Hose Barb

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
6	25SBTF06RVX
	25SBTF06EVX
	25SBTF08REX
8	25SBTF08RVX
	25SBTF08EVX
9	25SBTF09RVX
10	25SBTF10RVX
	25SBTF10EVX
13	25SBTF13RVX
	25SBTF13EEX
	25SBTF13EVX

25SFAW

Plug without valve, Male Thread

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/8	25SFAW10RXX
	25SFAW10EXX
G1/4	25SFAW13RXX
	25SFAW13EXX
G3/8	25SFAW17RXX
	25SFAW17EXX
G1/2	25SFAW21RXX
	25SFAW21EXX

25SFIM

Plug without valve, Female Thread

Stainless steel 303



Scan for more dimensions



A	References
M16x1	25SFIM16RXX

25SFIW

Plug without valve, Female Thread

Stainless steel 303/316L

Scan for more
dimensions

A	References
G1/8	25SFIW10RXX
	25SFIW10EXX
G1/4	25SFIW13RXX
	25SFIW13EXX
G3/8	25SFIW17RXX
	25SFIW17EXX
G1/2	25SFIW21RXX
	25SFIW21EXX

25SFKO

Plug without valve, with Plastic Hose Connection

Stainless steel 303/316L

Scan for more
dimensions

A	References
4 x 6	25SFKO06RXX
	25SFKO06EXX
6 x 8	25SFKO08RXX
	25SFKO08EXX
8 x 10	25SFKO10RXX

25SFTF

Plug without valve, Hose Barb

Stainless steel 303/316L

Scan for more
dimensions

A	References
6	25SFTF06RXX
6	25SFTF06EXX
8	25SFTF08RXX
8	25SFTF08EXX
9	25SFTF09RXX
9	25SFTF09EXX
10	25SFTF10RXX
10	25SFTF10EXX
13	25SFTF13RXX
13	25SFTF13EXX

27KAAW**Coupler with valve, Male Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27KAAW13REX
G1/4	27KAAW13RVX
G3/8	27KAAW17RVX
G3/8	27KAAW17EVX
G1/2	27KAAW21RVX
G1/2	27KAAW21EVX
G3/4	27KAAW26RVX
G3/4	27KAAW26EVX

27KAIW**Coupler with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
	27KAIW17RVX
G3/8	27KAIW17EEX
	27KAIW17EVX
	27KAIW21RVX
G1/2	27KAIW21EEX
	27KAIW21EVX
	27KAIW26RVX
G3/4	27KAIW26EVX

27KATF**Coupler with valve, Hose Barb**

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
8	27KATF08EVX
9	27KATF09RVX
9	27KATF09EVX
13	27KATF13RVX
13	27KATF13EVX

27KBAW**Coupler with valve, Male Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27KBAW13RVX
	27KBAW17RVX
G3/8	27KBAW17EEX
	27KBAW17EVX
	27KBAW21REX
G1/2	27KBAW21RVX
	27KBAW21EVX
	27KBAW26RVX
G3/4	27KBAW26EVX

27KBIW**Coupler with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27KBIW13EVX
G3/8	27KBIW17RVX
	27KBIW17EVX
	27KBIW21REX
G1/2	27KBIW21RVX
	27KBIW21EEX
	27KBIW21EVX
	27KBIW26RVX
G3/4	27KBIW26EVX

27KBTf**Coupler with valve, Hose Barb**

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
9	27KBTf09EVX
13	27KBTf13RVX
13	27KBTf13EVX

27KFAW**Coupler without valve, Male Thread**

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/2	27KFAW21EVX

27KFTF**Coupler without valve, Hose Barb**

Stainless steel 303, FKM



Scan for more dimensions



A	References
9	27KFTF09RVX

27SBAW**Plug with valve, Male Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27SBAW13RVX
G3/8	27SBAW17RVX
G3/8	27SBAW17EVX
G1/2	27SBAW21RVX
G1/2	27SBAW21EVX
G3/4	27SBAW26REX
G3/4	27SBAW26RVX
G3/4	27SBAW26EVX

27SBIW**Plug with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



A	References
G1/4	27SBIW13EVX
G3/8	27SBIW17RVX
G3/8	27SBIW17EVX
G1/2	27SBIW21REX
G1/2	27SBIW21RVX
G1/2	27SBIW21EEX
G1/2	27SBIW21EVX
G3/4	27SBIW26RVX
G3/4	27SBIW26EVX

27SBTF**Plug with valve, Hose Barb**

Stainless steel 303/316L, FKM



Scan for more dimensions



A	References
9	27SBTF09RVX
9	27SBTF09EVX
13	27SBTF13RVX
13	27SBTF13EVX

27SFAW**Plug without valve, Male Thread**

Stainless steel 303/316L



Scan for more dimensions



A	References
G1/4	27SFAW13RXX
G1/4	27SFAW13EXX
G3/8	27SFAW17RXX
G3/8	27SFAW17EXX
G1/2	27SFAW21RXX
G1/2	27SFAW21EXX
G3/4	27SFAW26RXX
G3/4	27SFAW26EXX

27SFIW**Plug without valve, Female Thread**

Stainless steel 303/316L



Scan for more dimensions



A	References
G3/8	27SFIW17RXX
G3/8	27SFIW17EXX
G1/2	27SFIW21RXX
G1/2	27SFIW21EXX
G3/4	27SFIW26RXX
G3/4	27SFIW26EXX

27SFTF**Plug without valve, Hose Barb**

Stainless steel 303/316L



Scan for more dimensions



A	References
6	27SFTF06EXX
	27SFTF08RXX
8	27SFTF08EXX
	27SFTF09RXX
9	27SFTF09EXX
	27SFTF13RXX
13	27SFTF13EXX

71KBIW

Coupler with valve, Female Thread

Stainless steel 303, FKM



Scan for more dimensions



Size	A	References
1/8"	G1/8	71KBIW10RVX

71SBIW

Plug with valve, Female Thread

Stainless steel 303, FKM



Scan for more dimensions



Size	A	References
1/8"	G1/8	71SBIW10RVX

72KBIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



Size	A	References
1/4"	G1/4	72KBIW13REX
1/4"	G1/4	72KBIW13RVX
1/4"	G1/4	72KBIW13EEX
1/4"	G1/4	72KBIW13EVX

72SBIW

Plug with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



Size	A	References
1/4"	G1/4	72SBIW13REX
1/4"	G1/4	72SBIW13RVX
1/4"	G1/4	72SBIW13EEX
1/4"	G1/4	72SBIW13EVX

73KBIW

Coupler with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



Size	A	References
3/8"	G3/8	73KBIW17REX
3/8"	G3/8	73KBIW17RVX
3/8"	G3/8	73KBIW17EEX
3/8"	G3/8	73KBIW17EVX

73SBIW

Plug with valve, Female Thread

Stainless steel 303/316L, EPDM, FKM



Scan for more dimensions



Size	A	References
3/8"	G3/8	73SBIW17REX
3/8"	G3/8	73SBIW17RVX
3/8"	G3/8	73SBIW17EEX
3/8"	G3/8	73SBIW17EVX

73SFIW

Coupler without valve, Female Thread

Stainless steel 316L



Scan for more dimensions



Size	A	References
3/8"	G3/8	73SFIW17EXX

74KBIW**Coupler with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
1/2"	G1/2	74KBIW21REX
1/2"	G1/2	74KBIW21RVX
1/2"	G1/2	74KBIW21EEX
1/2"	G1/2	74KBIW21EVX

74SBIW**Plug with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
1/2"	G1/2	74SBIW21REX
1/2"	G1/2	74SBIW21RVX
1/2"	G1/2	74SBIW21EEX
1/2"	G1/2	74SBIW21EVX

75KBIW**Coupler with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
3/4"	G3/4	75KBIW26REX
3/4"	G3/4	75KBIW26RVX
3/4"	G3/4	75KBIW26EEX
3/4"	G3/4	75KBIW26EVX

75SBIW**Plug with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
3/4"	G3/4	75SBIW26REX
3/4"	G3/4	75SBIW26RVX
3/4"	G3/4	75SBIW26EEX
3/4"	G3/4	75SBIW26EVX

76KBIW**Coupler with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
1"	G1	76KBIW33REX
1"	G1	76KBIW33RVX
1"	G1	76KBIW33EEX
1"	G1	76KBIW33EVX

76SBIW**Plug with valve, Female Thread**

Stainless steel 303/316L, EPDM, FKM

Scan for more
dimensions

Size	A	References
1"	G1	76SBIW33REX
1"	G1	76SBIW33RVX
1"	G1	76SBIW33EEX
1"	G1	76SBIW33EVX



Equipped with a high-flow valve, the **Rectus High-Flow Couplers** ensure optimal flow with low pressure drop. They are designed for air and neutral gases in applications with high air flow, in standard or aggressive environments.

Technical specifications



Fluids: compressed air and neutral gases



Operating pressure: up to 35 bar



Operating temperature: -20°C to +100°C



Functions: KA




Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
5,5	ISO B	950	1400/1423	23
7,8	EURO	2020	1600/1625	25
10	EURO	3500	1700/1727	27

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Components materials

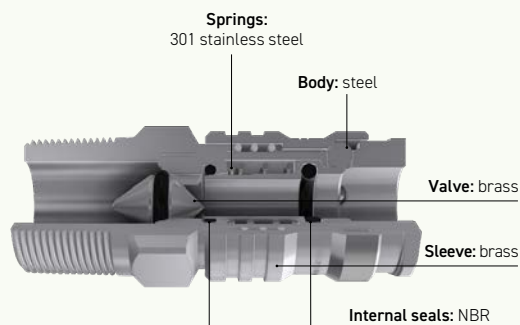

Benefits

- **The valve design, which reduces turbulence**, allows for a higher flow rate compared to traditional couplers, while reducing air consumption.
- **The one-handed connection** makes it easy to use.
- For the 1423, 1625 and 1727 series, the design of the **bi-polymer sleeve improves ergonomics and resistance to impact and scratches**.

Recommended applications



1400KAAK

Coupler with valve, Male Thread

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
R1/4	1400KAAK13SPN
R3/8	1400KAAK17SPN
R1/2	1400KAAK21SPN

1400KAIW

Coupler with valve, Female Thread

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
G1/4	1400KAIW13SPN
G3/8	1400KAIW17SPN

1400KATF

Coupler with valve, Hose Barb

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
8	1400KATF08SPN
10	1400KATF10SPN

1423KAAK

Coupler with valve, Male Thread

Nickel-plated brass, QPQ-treated steel, NBR



A	References
R1/4	1423KAAK13SPN
R3/8	1423KAAK17SPN

1423KAIW

Coupler with valve, Female Thread

Nickel-plated brass, QPQ-treated steel, NBR



A	References
G1/4	1423KAIW13SPN
G3/8	1423KAIW17SPN

1423KATF

Coupler with valve, Hose Barb

Nickel-plated brass, QPQ-treated steel, NBR



A	References
6	1423KATF06SPN
8	1423KATF08SPN
9	1423KATF09SPN
10	1423KATF10SPN

23SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

1600KAAK**Coupler with valve, Male Thread***Nickel-plated brass, QPQ-treated steel, NBR*

Scan for more dimensions



A	References
R1/4	1600KAAK13SPN
R3/8	1600KAAK17SPN
R1/2	1600KAAK21SPN

1600KAIW**Coupler with valve, Female Thread***Nickel-plated brass, QPQ-treated steel, NBR*

Scan for more dimensions



A	References
G1/4	1600KAIW13SPN
G3/8	1600KAIW17SPN
G1/2	1600KAIW21SPN

1600KATF**Coupler with valve, Hose Barb***Nickel-plated brass, QPQ-treated steel, NBR*

Scan for more dimensions



A	References
6	1600KATF06SPN
8	1600KATF08SPN
9	1600KATF09SPN
10	1600KATF10SPN
13	1600KATF13SPN

1625KAAK**Coupler with valve, Male Thread***Nickel-plated brass, QPQ-treated steel, PA6+TPE, NBR*

Scan for more dimensions



A	References
R1/4	1625KAAK13SPN
R3/8	1625KAAK17SPN
R1/2	1625KAAK21SPN

1625KAIW**Coupler with valve, Female Thread***Nickel-plated brass, QPQ-treated steel, PA6+TPE, NBR*

Scan for more dimensions



A	References
G1/4	1625KAIW13SPN
G3/8	1625KAIW17SPN
G1/2	1625KAIW21SPN

1625KATF**Coupler with valve, Hose Barb***Nickel-plated brass, QPQ-treated steel, PA6+TPE, NBR*

Scan for more dimensions



A	References
6	1625KATF06SPN
8	1625KATF08SPN
9	1625KATF09SPN
10	1625KATF10SPN
13	1625KATF13SPN

25SFAK**Plug without valve, Male Thread***Zinc-plated steel*

Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SAFW**Plug without valve, Male Thread***Zinc-plated steel/Nickel-plated brass*

Scan for more dimensions



A	References
G1/8	25SAFW10SXZ
G1/4	25SAFW13SXZ
G3/8	25SAFW17SXZ
G1/2	25SAFW21SXZ

25SFIW**Plug without valve, Female Thread***Zinc-plated steel/Nickel-plated brass*

Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
G1/4	25SFIW13SXZ
G3/8	25SFIW17SXZ
G1/2	25SFIW21SXZ

25SFTF**Plug without valve, Hose Barb***Zinc-plated steel/Nickel-plated brass*

Scan for more dimensions



A	References
6	25SFTF06SXZ
8	25SFTF08SXZ
9	25SFTF09SXZ
10	25SFTF10SXZ
13	25SFTF13SXZ

1700KAAK

Coupler with valve, Male Thread

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
R3/8	1700KAAK17SPN
R1/2	1700KAAK21SPN
R3/4	1700KAAK26SPN

1700KAIW

Coupler with valve, Female Thread

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
G3/8	1700KAIW17SPN
G1/2	1700KAIW21SPN
G3/4	1700KAIW26SPN

1700KATF

Coupler with valve, Hose Barb

Nickel-plated brass, QPQ-treated steel, NBR



Scan for more dimensions



A	References
10	1700KATF10SPN
13	1700KATF13SPN
16	1700KATF16SPN
19	1700KATF19SPN

1727KAIW

Coupler with valve, Female Thread

Nickel-plated brass, QPQ-treated steel, PA6+TPE, NBR



Scan for more dimensions



A	References
G3/4	1727KAIW26SPN

1727KATF

Coupler with valve, Hose Barb

Nickel-plated brass, QPQ-treated steel, PA6+TPE, NBR



Scan for more dimensions



A	References
19	1727KATF19SPN

27SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R3/8	27SFAK17SXN
R1/2	27SFAK21SXN
R3/4	27SFAK26SXN

27SFAW

Plug without valve, Male Thread

Nickel-plated brass / Nickel-plated steel



Scan for more dimensions



A	References
G1/4	27SFAW13MXN
G3/8	27SFAW17SXN
G1/2	27SFAW21SXN
G3/4	27SFAW26SXN

27SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	27SFIW13SXN
G3/8	27SFIW17SXN
G1/2	27SFIW21SXN
G3/4	27SFIW26SXN

27SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
10	27SFTF10SXN
13	27SFTF13SXN
16	27SFTF16SXN
19	27SFTF19SXN



Rectus safety couplers are designed with a locking system that prevents accidental disconnection.

INDUSTRIAL VERSION



Technical specifications



Fluids: air and neutral gases, industrial water



Operating pressure: up to 35 bar



Operating temperature: -20°C to +100°C




Functions: KS, KD



Regulations: RoHS, REACH

Components materials

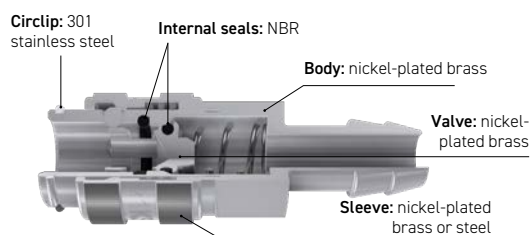

Nominal diameter (mm)	Profile	Flow rate (l/min)*		Series coupler	Plugs series
		Air	Water		
5	Rectus	550 (KS)	310 (KD)	21	21
7.8	Rectus	1800 (KS)	710 (KD)	25	25

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Recommended applications



Facilitates connection/disconnection on a liquid circuit test bench

Benefits

- **Safety locking system** preventing any accidental disconnection. The user must push the plug into the coupler in order to disconnect.
- **Series 25 equipped with a high-flow valve** for optimal flow and low pressure drop.

BREATHING AIR VERSION



Technical specifications



Fluids: oxygen



Operating pressure: up to 35 bar



Operating temperature: -20°C to +100°C



Functions: KS



Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
7.4	Rectus	1700	95	95
7.4	Rectus	1700	96	96


* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.


Benefits

- Specially developed for "breathing air" applications, (tested according to DIN EN 14593).
- **Safety locking system** preventing accidental disconnection: the plug must be pushed into the coupler.
- **High-flow valve** for optimal flow and low pressure drop.

Components materials

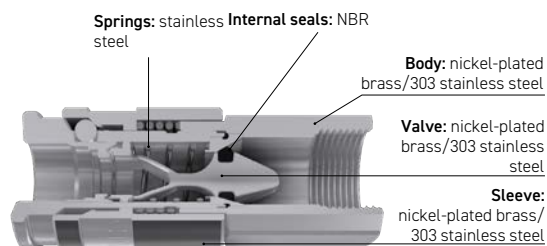

Recommended applications

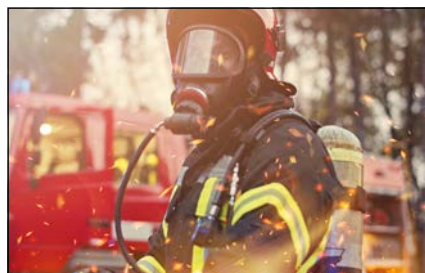

Lock to prevent unintentional disconnection to secure firefighters' breathing apparatus

21KSAW

Coupler with valve, Male Thread

Brass/Nickel-plated brass, NBR
without a sealing ringScan for more
dimensions

A	References
G1/8	21KSAW10MPN
G1/4	21KSAW13MPN
G3/8	21KSAW17MPX

21KSIW

Coupler with valve, Female Thread

Brass/Nickel-plated brass, NBR

Scan for more
dimensions

A	References
G1/8	21KSIW10MPN
G1/4	21KSIW13MPN
G3/8	21KSIW17MPX

21KSTF

Coupler with valve, Hose Barb

Brass/Nickel-plated brass, NBR

Scan for more
dimensions

A	References
5	21KSTF05MPN
6	21KSTF06MPN
8	21KSTF08MPN
9	21KSTF09MPN
10	21KSTF10MPN

21SSAW

Plug without valve, Male Thread

Brass

Scan for more
dimensions

A	References
G1/8	21SSAW10MXX
G1/4	21SSAW13MXX

21SSIW

Plug without valve, Female Thread

Nickel-plated brass, Brass

Scan for more
dimensions

A	References
G1/8	21SSIW10MXN
	21SSIW10MXX
G1/4	21SSIW13MXN
	21SSIW13MXX

21SSTF

Plug without valve, Hose Barb

Nickel-plated brass, Brass

Scan for more
dimensions

A	References
6	21SSTF06MXN
	21SSTF06MXX
8	21SSTF08MXX
9	21SSTF09MXX
10	21SSTF10MXX

21KDAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR
without a sealing ringScan for more
dimensions

A	References
G1/8	21KDAW10MPN
G1/4	21KDAW13MPN
G3/8	21KDAW17MPN

21KDIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR


Scan for more
dimensions

A	References
G1/8	21KDIW10MPN
G1/4	21KDIW13MPN
G3/8	21KDIW17MPN

21KDTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
6	21KDTF06MPN
10	21KDTF10MPN

21SDAW

Plug with valve, Male Thread

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
G1/8	21SDAW10MPN
G1/4	21SDAW13MPN
G3/8	21SDAW17MPN

21SDIW

Plug with valve, Female Thread

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
G1/8	21SDIW10MPN
G1/4	21SDIW13MPN
G3/8	21SDIW17MPN

21SDTF

Plug with valve, Hose Barb

Nickel-plated brass, NBR

Scan for more
dimensions

A	References
6	21SDTF06MPN
8	21SDTF08MPN
10	21SDTF10MPN

25KSAK

Coupler with valve, Male Thread

Nickel-plated brass/Acier, NBR



Scan for more dimensions



A	References
R1/4	25KSAK13SPN
	25KSAK13MPN
R3/8	25KSAK17MPN
R1/2	25KSAK21MPN

25KSIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	25KSIW13MPN
G3/8	25KSIW17MPN
G1/2	25KSIW21MPN

25KSTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
8	25KSTF08MPN
10	25KSTF10MPN

25SSAW

Plug without valve, Male Thread

Zinc-plated steel



Scan for more dimensions



A	References
G1/4	25SSAW13SXZ

25SSIW

Plug without valve, Female Thread

Zinc-plated steel



Scan for more dimensions



A	References
G1/4	25SSIW13SXZ
G3/8	25SSIW17SXZ

25SSTF

Plug without valve, Hose Barb

Zinc-plated steel



Scan for more dimensions



A	References
8	25SSTF08SXZ
10	25SSTF10SXZ

25KDAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	25KDAK13MPN
R3/8	25KDAK17MPN
R1/2	25KDAK21MPN

25KDIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	25KDIW13BPN
G3/8	25KDIW17MPN

25KDTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	25KDTF06MPN
9	25KDTF09MPN
10	25KDTF10MPN
13	25KDTF13MPN

25SDAW

Plug with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	25SDAW13MPN
G3/8	25SDAW17MPN

25SDIW

Plug with valve, Female Thread

Nickel-plated brass, NBR, FKM



Scan for more dimensions



A	References
G1/4	25SDIW13MPN
G1/4	25SDIW13MPN
G3/8	25SDIW17MPN

BREATHING AIR VERSIONS

95KSAK

Coupler with valve, Male Thread

Nickel-plated brass ou Stainless steel 303, NBR



Scan for more dimensions



A	References
R1/4	95KSAK13BPN
R1/4	95KSAK13RPN
R3/8	95KSAK17BPN
R3/8	95KSAK17RPN

95KSAW

Coupler with valve, Male Thread

Stainless steel 316L, FKM



Scan for more dimensions



A	References
G1/4	95KSAW13EVX

95KSIW

Coupler with valve, Female Thread

Nickel-plated brass ou Stainless steel 303, NBR, FKM



Scan for more dimensions



A	References
G1/4	95KSIW13BPN 95KSIW13RVX
G3/8	95KSIW17BPN
G3/8	95KSIW17RPN

95KSTF

Coupler with valve, Hose Barb

Nickel-plated brass ou Stainless steel 303, NBR



Scan for more dimensions



A	References
6	95KSTF06BPN
9	95KSTF09BPN
10	95KSTF10RPN

95SSAK

Plug without valve, Male Thread

Nickel-plated brass



Scan for more dimensions



A	References
R1/4	95SSAK13MXN
R3/8	95SSAK17MXN

95SSIW

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/4	95SSIW13MXN

95SSTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
6	95SSTF06MXN

96KSAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
R1/4	96KSAK13BPN
R3/8	96KSAK17BPN

96KSAW

Coupler with valve, Male Thread

Nickel-plated brass ou Stainless steel 303, NBR, FKM, EPDM



Scan for more dimensions



A	References
G1/4	96KSAW13BPN
G3/8	96KSAW17REX
	96KSAW17RVX
G1/2	96KSAW21RVX

96KSIW

Coupler with valve, Female Thread

Nickel-plated brass ou Stainless steel 303, NBR, FKM



Scan for more dimensions



A	References
G1/4	96KSIW13BPN
G3/8	96KSIW17BPN
	96KSIW17RVX
G1/2	96KSIW21RVX

96KSTF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
9	96KSTF09BPN

96SSAK

Plug without valve, Male Thread

Nickel-plated brass ou Stainless steel 316L



Scan for more dimensions



A	References
R1/4	96SSAK13MXN
	96SSAK13EXX
R3/8	96SSAK17MXN

96SSAW

Plug without valve, Male Thread

Stainless steel 303



Scan for more dimensions



A	References
G1/4	96SSAW13RXX
G3/8	96SSAW17RXX

96SSIW

Plug without valve, Female Thread

Nickel-plated brass



Scan for more dimensions



A	References
G1/4	96SSIW13MXN
G3/8	96SSIW17MXN

96SSTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more dimensions



A	References
9	96SSTF09MXN



Rectus safety couplers with automatic vent evacuate compressed air before disengagement. They thus ensure optimal protection for users.

PUSH-BUTTON VERSION



Technical specifications



Fluids: compressed air and neutral gases



Operating pressure: up to 12 bar



Operating temperature: -20°C to +100°C



Functions: KP




Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
5.5	ISO B	675	24	23
5.5	ISO C	810	18	18
7.4	EURO	1225	26	25
8	ISO B	1470	30	30
8	ISO C	2100	84	84

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Components materials

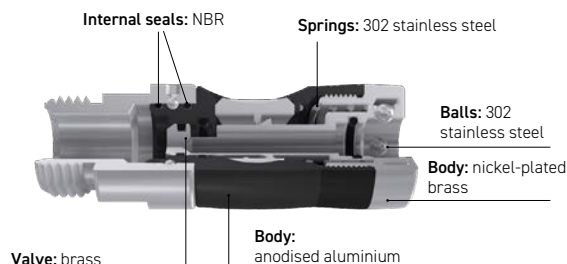

Benefits

- **The absence of a whiplash effect from pressurised hoses** ensures operator safety thanks to automatic purging before disconnection (ISO 4414):
 - Press the push button once to release the air from the coupler.
 - Press a second time to disconnect the tip.

VERSION WITH SLIDING RING



Technical specifications



Fluids: compressed air and neutral gases



Operating pressure: up to 12 bar



Operating temperature: -20°C to +100°C
(+60°C series 14, 24, 26)



Functions: KE




Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
5.5	ISO B	950	1400	23
5.5	ARO	1400	14	22
7.4	EURO	830	26	25
7.8	EURO	2020	1600	25
10	EURO	3500	1700	27

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Constituent materials

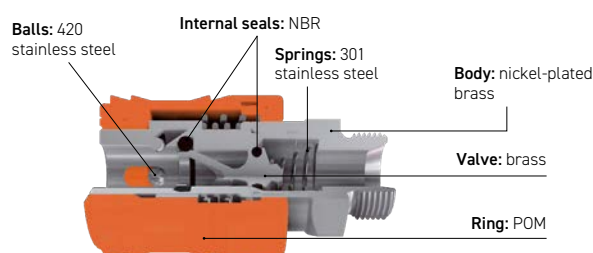

Benefits

- **The absence of a whipping effect from pressurised hoses** ensures operator safety thanks to automatic venting before disconnection (ISO 4414):
 - When the sleeve is pushed towards the coupler for the first time, the air is evacuated.
 - By pressing the sleeve a second time, the disconnection is performed safely.
- With polymer sleeve versions, **better resistance to impact and scratches**.

VERSION WITH ROTATING SLEEVE



Technical specifications



Fluids: compressed air and neutral gases



Operating pressure: up to 16 bar



Operating temperature: -20°C to +60°C



Functions: KE




Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
5.5	ARO	1250	94**A	22
5.5	ISO B	1250	94**U	23
7.2	EURO	2000	94**E	25
8	ISO B	2400	94**U	30

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Components materials

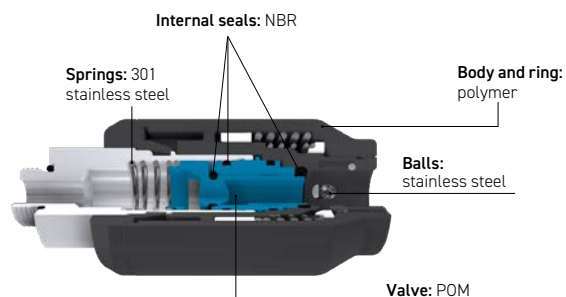

Benefits

- **No whipping effect from pressurised hoses** thanks to automatic venting prior to disconnection to ensure operator safety:
 - Rotating in one direction, the air is vented.
 - Rotate in the opposite direction, disconnecting safely.
- The polymer ring provides **better resistance to impact and scratches**.

Recommended applications



Easy to use thanks to the push button that activates the Vent



Vent activated by rotating the ring

PUSH-BUTTON VERSIONS

24KPAW

Coupler with valve, Male Thread

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
G1/4	24KPAW13APX
G3/8	24KPAW17APX
G1/2	24KPAW21APX

24KPIW

Coupler with valve, Female Thread

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
G1/4	24KPIW13APX
G3/8	24KPIW17APX
G1/2	24KPIW21APX

24KPTF

Coupler with valve, Hose Barb

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
6	24KPTF06APX
8	24KPTF08APX
10	24KPTF10APX

23SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFKO

Plug without valve, with Plastic Hose Connection

Nickel-plated steel



Scan for more dimensions



A	References
8 x 10	23SFKO10SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

18KPAW

Coupler with valve, Male Thread

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
G1/4	18KPAW13APX
G3/8	18KPAW17APX
G1/2	18KPAW21APX

18KPIW

Coupler with valve, Female Thread

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
G1/4	18KPIW13APX
G3/8	18KPIW17APX
G1/2	18KPIW21APX

18KPTF

Coupler with valve, Hose Barb

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
6	18KPTF06APX
8	18KPTF08APX
9	18KPTF09APX
13	18KPTF13APX

18SFAW

Plug without valve, Male Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G1/4	18SFAW13SXN
G3/8	18SFAW17SXN

18SFAK

Plug without valve, Male Thread

Nickel-plated steel

Scan for more
dimensions

A	References
R1/4	18SFAK13SXN

18SFIW

Plug without valve, Female Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G1/4	18SFIW13SXN
G3/8	18SFIW17SXN

18SFTF

Plug without valve, Hose Barb

Nickel-plated steel

Scan for more
dimensions

A	References
6	18SFTF06SXN
8	18SFTF08SXN
10	18SFTF10SXN

26KPAW

Coupler with valve, Male Thread

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
G1/4	26KPAW13APX
G3/8	26KPAW17APX
G1/2	26KPAW21APX

26KPIW

Coupler with valve, Female Thread

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
G1/4	26KPIW13APX
G3/8	26KPIW17APX
G1/2	26KPIW21APX

26KPTF

Coupler with valve, Hose Barb

Anodized aluminum, Nickel-plated brass



Scan for more dimensions



A	References
6	26KPTF06APX
8	26KPTF08APX
10	26KPTF10APX
13	26KPTF13APX

25SFAK

Plug without valve, Male Thread

Zinc-plated steel



Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SFAW

Plug without valve, Male Thread

Nickel-plated steel, technical polymer



Scan for more dimensions



DN	C	References
7.2	G1/8	25SFAW10SXZ
	G1/4	25SFAW13SXZ
	G3/8	25SFAW17SXZ
	G1/2	25SFAW21SXZ

25SFIM

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
M16x1.5	25SFIM16SXZ

25SFIW

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
G1/4	25SFIW13SXZ
G3/8	25SFIW17SXZ
G1/2	25SFIW21SXZ

25SFTF

Plug without valve, Hose Barb

Nickel-plated brass



Scan for more dimensions



DN	A	References
7.2	6	25SFTF06SXZ
	8	25SFTF08SXZ
	9	25SFTF09SXZ
	10	25SFTF10SXZ
	13	25SFTF13SXZ

30KPAW**Coupler with valve, Male Thread***Anodized aluminum, Nickel-plated brass*Scan for more
dimensions

A	References
G1/4	30KPAW13APX
G3/8	30KPAW17APX
G1/2	30KPAW21APX

30KPIW**Coupler with valve, Female Thread***Anodized aluminum, Nickel-plated brass*Scan for more
dimensions

A	References
G1/4	30KPIW13APX
G3/8	30KPIW17APX
G1/2	30KPIW21APX

30KPTF**Coupler with valve, Hose Barb***Anodized aluminum, Nickel-plated brass*Scan for more
dimensions

A	References
8	30KPTF08APX
10	30KPTF10APX

30SFAW**Plug without valve, Male Thread***Nickel-plated steel*Scan for more
dimensions

A	References
G1/4	30SFAW13SXN
G3/8	30SFAW17SXN
G1/2	30SFAW21SXN

30SFTF**Plug without valve, Hose Barb***Nickel-plated steel*Scan for more
dimensions

A	References
8	30SFTF08SXN
10	30SFTF10SXN
13	30SFTF13SXN

30SFIW**Plug without valve, Female Thread***Nickel-plated steel*Scan for more
dimensions

A	References
G1/4	30SFIW13SXN
G3/8	30SFIW17SXN
G1/2	30SFIW21SXN

84KPAW

Coupler with valve, Male Thread

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
G1/4	84KPAW13APX
G3/8	84KPAW17APX
G1/2	84KPAW21APX

84KPIW

Coupler with valve, Female Thread

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
G1/4	84KPIW13APX
G3/8	84KPIW17APX
G1/2	84KPIW21APX

84KPTF

Coupler with valve, Hose Barb

Anodized aluminum, Nickel-plated brass

Scan for more
dimensions

A	References
10	84KPTF10APX
13	84KPTF13APX

84SFAW

Plug without valve, Male Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G1/4	84SFAW13SXN
G3/8	84SFAW17SXN
G1/2	84SFAW21SXN

84SFIW

Plug without valve, Female Thread

Nickel-plated steel

Scan for more
dimensions

A	References
G1/4	84SFIW13SXN
G3/8	84SFIW17SXN

84SFTF

Plug without valve, Hose Barb

Nickel-plated steel

Scan for more
dimensions

A	References
10	84SFTF10SXN
13	84SFTF13SXN

SLIDING SLEEVE VERSIONS

1400KEAW

Coupler with valve, Male Thread

Brass/Nickel-plated steel, NBR

Scan for more dimensions



A	References
G1/4	1400KEAW13SPN

1400KEIW

Coupler with valve, Female Thread

Brass/Nickel-plated steel, NBR

Scan for more dimensions



A	References
G1/4	1400KEIW13SPN
G1/2	1400KEIW21SPN

23SFAK

Plug without valve, Male Thread

Nickel-plated steel

Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel

Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel

Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel

Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

14KEAK

Coupler with valve, Male Thread

Nickel-plated brass, polymer, NBR



Scan for more dimensions



A	References
R1/4	14KEAK13MPN
R3/8	14KEAK17MPN
R1/2	14KEAK21MPN

14KEAW

Coupler with valve, Male Thread

Nickel-plated brass, polymer, NBR



Scan for more dimensions



A	References
G1/2	14KEAW17MPN
G3/8	14KEAW21MPN

14KEIW

Coupler with valve, Female Thread

Nickel-plated brass, polymer, NBR



Scan for more dimensions



A	References
G1/4	14KEIW13MPN
G3/8	14KEIW17MPN
G1/2	14KEIW21MPN

14KETF

Coupler with valve, Hose Barb

Nickel-plated brass, polymer, NBR



Scan for more dimensions



A	References
8	14KETF08MPN
9	14KETF09MPN
10	14KETF10MPN

22SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	22SFAK10SXN
R1/4	22SFAK13SXN
R3/8	22SFAK17SXN
R1/2	22SFAK21SXN

22SFAW

Plug without valve, Male Thread

Nickel-plated steel, technical polymer



Scan for more dimensions



DN	C	References
5.5	G1/4	22SFAW13SXN
	G1/2	22SFAW21SXN

22SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFIW13SXN
G3/8	22SFIW17SXN
G1/2	22SFIW21SXN

22SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



DN	ØD	References
5.5	6	22SFTF06SXN
	8	22SFTF08SXN
	9	22SFTF09SXN
	10	22SFTF10SXN
	13	22SFTF13SXN

26KEAW

Coupler with valve, Male Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	26KEAW13MPN
G3/8	26KEAW17MPN
G1/2	26KEAW21MPN

26KEIW

Coupler with valve, Female Thread

Nickel-plated brass, NBR



Scan for more dimensions



A	References
G1/4	26KEIW13MPN
G3/8	26KEIW17MPN
G1/2	26KEIW21MPN

26KETF

Coupler with valve, Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6	26KETF06MPN
8	26KETF08MPN
9	26KETF09MPN
10	26KETF10MPN
13	26KETF13MPN

25SFAK

Plug without valve, Male Thread

Zinc-plated steel



Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SFAW

Plug without valve, Male Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFAW10SXZ
G1/4	25SFAW13SXZ
G3/8	25SFAW17SXZ
G1/2	25SFAW21SXZ

25SFIM

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
M16x1.5	25SFIM16SXZ

25SFIW

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
G1/4	25SFIW13SXZ
G3/8	25SFIW17SXZ
G1/2	25SFIW21SXZ

25SFTF

Plug without valve, Hose Barb

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
6	25SFTF06SXZ
8	25SFTF08SXZ
9	25SFTF09SXZ
10	25SFTF10SXZ
13	25SFTF13SXZ

1600KEAK

Coupler with valve, Male Thread

Brass/Nickel-plated steel, NBR



Scan for more dimensions



A	References
R1/4	1600KEAK13SPN
R3/8	1600KEAK17SPN
R1/2	1600KEAK21SPN

1600KEIW

Coupler with valve, Female Thread

Brass/Nickel-plated steel, NBR



Scan for more dimensions



A	References
G1/4	1600KEIW13SPN
G3/8	1600KEIW17SPN
G1/2	1600KEIW21SPN

1600KETF

Coupler with valve, Hose Barb

Brass/Nickel-plated steel, NBR



Scan for more dimensions



A	References
6	1600KETF06SPN
8	1600KETF08SPN
9	1600KETF09SPN
10	1600KETF10SPN
13	1600KETF13SPN

25SFAK

Plug without valve, Male Thread

Zinc-plated steel



Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SFAW

Plug without valve, Male Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFAW10SXZ
G1/4	25SFAW13SXZ
G3/8	25SFAW17SXZ
G1/2	25SFAW21SXZ

25SFIM

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
M16x1.5	25SFIM16SXZ

25SFIW

Plug without valve, Female Thread

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
G1/4	25SFIW13SXZ
G3/8	25SFIW17SXZ
G1/2	25SFIW21SXZ

25SFTF

Plug without valve, Hose Barb

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
6	25SFTF06SXZ
8	25SFTF08SXZ
9	25SFTF09SXZ
10	25SFTF10SXZ
13	25SFTF13SXZ

1700KEAW

Coupler with valve, Male Thread

Brass/Nickel-plated steel, NBR



Scan for more dimensions



A	References
G3/8	1700KEAW17SPN
G1/2	1700KEAW21SPN
G3/4	1700KEAW26SPN

1700KEIW

Coupler with valve, Female Thread

Brass/Nickel-plated steel, NBR



Scan for more dimensions



A	References
G3/8	1700KEIW17SPN
G1/2	1700KEIW21SPN
G3/4	1700KEIW26SPN

27SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/4	27SFAK13SXN
R3/8	27SFAK17SXN
R1/2	27SFAK21SXN
R3/4	27SFAK26SXN

27SFAW

Plug without valve, Male Thread

Nickel-plated brass / Nickel-plated steel



Scan for more dimensions



A	References
G3/8	27SFAW17SXN
G1/2	27SFAW21SXN
G3/4	27SFAW26SXN

27SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	27SFIW13SXN
G3/8	27SFIW17SXN
G1/2	27SFIW21SXN
G3/4	27SFIW26SXN

27SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
10	27SFTF10SXN
13	27SFTF13SXN
16	27SFTF16SXN
19	27SFTF19SXN

ROTATING-SLEEVE VERSIONS

9401A

Coupler with valve, Male Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9401A06 13
5.5	G3/8	9401A06 17
5.5	G1/2	9401A06 21

9405A

Coupler with valve, Male Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	R1/4	9405A06 13
5.5	R3/8	9405A06 17
5.5	R1/2	9405A06 21

9414A

Coupler with valve, Female Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9414A06 13
5.5	G3/8	9414A06 17
5.5	G1/2	9414A06 21

9416A

Coupler with valve, Bulkhead Mountable, Female BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9416A06 13

9421A

Coupler with valve, with Hosetail

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	ØD	References
5.5	8	9421A06 08
5.5	10	9421A06 10

22SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	22SFAK10SXN
R1/4	22SFAK13SXN
R3/8	22SFAK17SXN
R1/2	22SFAK21SXN

22SFAW

Plug without valve, Male Thread

Nickel-plated steel, technical polymer



Scan for more dimensions



DN	C	References
5.5	G1/4	22SFAW13SXN
	G1/2	22SFAW21SXN

22SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	22SFIW13SXN
G3/8	22SFIW17SXN
G1/2	22SFIW21SXN

22SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



DN	ØD	References
5.5	6	22SFTF06SXN
	8	22SFTF08SXN
	9	22SFTF09SXN
	10	22SFTF10SXN
	13	22SFTF13SXN

9401U

Coupler with valve, Male Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9401U06 13
5.5	G3/8	9401U06 17
5.5	G1/2	9401U06 21
8	G1/4	9401U08 13
8	G3/8	9401U08 17
8	G1/2	9401U08 21

9405U

Coupler with valve, Male Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	R1/4	9405U06 13
5.5	R3/8	9405U06 17
5.5	R1/2	9405U06 21
8	R1/4	9405U08 13
8	R3/8	9405U08 17
8	R1/2	9405U08 21

9414U

Coupler with valve, Female Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9414U06 13
5.5	G3/8	9414U06 17
5.5	G1/2	9414U06 21
8	G1/4	9414U08 13
8	G3/8	9414U08 17
8	G1/2	9414U08 21

9416U

Coupler with valve, Bulkhead Mountable, Female BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5.5	G1/4	9416U06 13
8	G3/8	9416U08 17

9421U

Coupler with valve, with Hosetail

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	ØD	References
5.5	6	9421U06 06
5.5	8	9421U06 08
5.5	10	9421U06 10
8	8	9421U08 08
8	10	9421U08 10
8	13	9421U08 13

23SFAK

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
R1/8	23SFAK10SXN
R1/4	23SFAK13SXN
R3/8	23SFAK17SXN
R1/2	23SFAK21SXN

23SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFAW10SXN
G1/4	23SFAW13SXN
G3/8	23SFAW17SXN
G1/2	23SFAW21SXN

23SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/8	23SFIW10SXN
G1/4	23SFIW13SXN
G3/8	23SFIW17SXN
G1/2	23SFIW21SXN

23SFKO

Plug without valve, with Plastic Hose Connection

Nickel-plated steel



Scan for more dimensions



A	References
8 x 10	23SFKO10SXN

23SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
6	23SFTF06SXN
8	23SFTF08SXN
9	23SFTF09SXN
10	23SFTF10SXN
13	23SFTF13SXN

30SFAW

Plug without valve, Male Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	30SFAW13SXN
G3/8	30SFAW17SXN
G1/2	30SFAW21SXN

30SFIW

Plug without valve, Female Thread

Nickel-plated steel



Scan for more dimensions



A	References
G1/4	30SFIW13SXN
G3/8	30SFIW17SXN
G1/2	30SFIW21SXN

30SFTF

Plug without valve, Hose Barb

Nickel-plated steel



Scan for more dimensions



A	References
8	30SFTF08SXN
10	30SFTF10SXN
13	30SFTF13SXN

9401E**Coupler with valve, Male Thread**

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
7.2	G1/4	9401E07 13
7.2	G3/8	9401E07 17
7.2	G1/2	9401E07 21

9414E**Coupler with valve, Female Thread**

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
7.2	G1/4	9414E07 13
7.2	G3/8	9414E07 17
7.2	G1/2	9414E07 21

9416E**Coupler with valve, Bulkhead Mountable, Female BSPP Thread**

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
7.2	G3/8	9416E07 17

9421E**Coupler with valve, with Hosetail**

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	ØD	References
7.2	8	9421E07 08
7.2	10	9421E07 10
7.2	13	9421E07 13

25SFAK**Plug without valve, Male Thread**

Zinc-plated steel



Scan for more dimensions



A	References
R1/8	25SFAK10SXZ
R1/4	25SFAK13SXZ
R3/8	25SFAK17SXZ
R1/2	25SFAK21SXZ

25SFAW**Plug without valve, Male Thread**

Zinc-plated steel, technical polymer



Scan for more dimensions



DN	C	References
7.2	G1/8	25SFAW10SXZ
	G1/4	25SFAW13SXZ
	G3/8	25SFAW17SXZ
	G1/2	25SFAW21SXZ

25SFIM**Plug without valve, Female Thread**

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
M16x1.5	25SFIM16SXZ

25SFIW**Plug without valve, Female Thread**

Zinc-plated steel/Nickel-plated brass



Scan for more dimensions



A	References
G1/8	25SFIW10SXZ
G1/4	25SFIW13SXZ
G3/8	25SFIW17SXZ
G1/2	25SFIW21SXZ

25SFTF**Plug without valve, Hose Barb**

Zinc-plated steel-plated brass



Scan for more dimensions



DN	A	References
7.2	6	25SFTF06SXZ
	8	25SFTF08SXZ
	9	25SFTF09SXZ
	10	25SFTF10SXZ
	13	25SFTF13SXZ



Made from technical polymers, these couplers are ideal for applications requiring high chemical resistance. Available in POM for air and neutral gases, as well as in PVDF for treated water and analytical gases.

Technical specifications



Fluids: air and neutral gases, industrial water and treated water with or without glycol



Operating pressure:

PVDF: 8 bar
POM and Series 70 (G1/2 up to G1): 10 bar
Series 70 (G1/8 up to G3/8): 15 bar



Operating temperature:

POM: -20°C to +80°C (+90°C for 70 series)
PVDF: -20°C to +120°C




Functions: KA, KB



Regulations: RoHS, REACH

Components materials

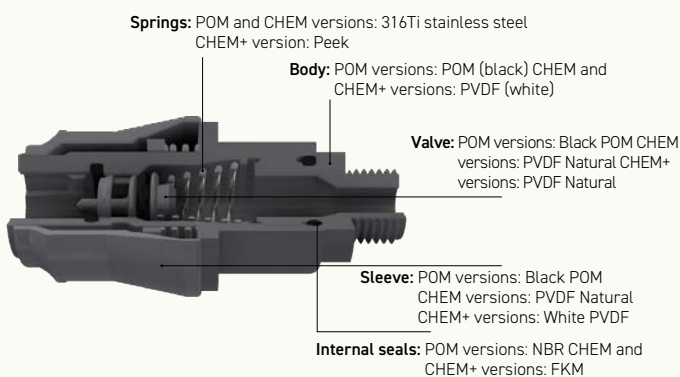

Nominal diameter (mm)	Profile	Flow rate (NL/min)*		Series coupler	Plugs series
		Air 	Water 		
5	EURO	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21	21
5	Rectus	310 (KB) to 550 (KA)	2.7 (KB) to 7 (KA)	21 coded	21
7	Rectus	770 (KB) to 1100 (KA)	12 (KB) to 17 (KA)	48/48 coded	48
6-20	ISO 7241-1 B	-	9 (KB) 17 (KB) 33 (KB) 79 (KB) 117 (KB)	72 73 74 75 76	72 73 74 75 76

* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Identification of coded versions



Benefits


- **PVDF version for high chemical resistance** in medical applications.
- **The versions with a conical sleeve** are specially designed to facilitate handling with gloves.
- **The 21 and 48 series are available in coded versions** to secure the coupler to its plug and prevent fluid mixing.
- **The 70 series stands out for its high flow rate**, high pressure resistance and low pressure drop.

Recommended applications



21KBKE


Coupler with valve, Panel Mount for Plastic Hose Connection for Front Panel Installation



A	HEX	HEX1	L	L1	L2	D	B	G	Cap color	References POM	References CHEM
6 x 8	17	27	56	7	20.5	28	7	M25x1	Standard	21KBKE08DPX	21KBKE08FVX

21KBAW


Coupler with valve, Male Thread with a conical cap



A	HEX	L	L1	D	Cap color	References POM	References CHEM
G1/8	17	50	7	25.5	Standard	21KBAW10DPX	21KBAW10FVX
G1/4	17	50	7	25.5	Standard	21KBAW13DPX	21KBAW13FVX

21KBAW


Coupler with valve, Male Thread with a cylindrical cap



A	HEX	L	L1	D	Cap color	References POM	References CHEM
G1/4	17	50	7	21	Blue ●		21KBAW13FVXGB
G1/4	17	50	7	21	Red ●	21KBAW13DPXGR	21KBAW13FVXGR

21KBIW


Coupler with valve, Female Thread with a conical cap



A	HEX	L	L1	D	Cap color	References POM	References CHEM
G1/8	17	53	8	25.5	Standard	21KBIW10DPX	21KBIW10FVX
G1/4	17	39	9	25.5	Standard	21KBIW13DPX	21KBIW13FVX

21KBIW


Coupler with valve, Female Thread with a cylindrical cap



A	HEX	L	L1	D	Cap color	References POM	References CHEM
G1/4	17	39	9	21	Blue ●	21KBIW13DPXGB	21KBIW13FVXGB
G1/4	17	39	9	21	Red ●	21KBIW13DPXGR	21KBIW13FVXGR

21KBKO


Coupler with valve, with Plastic Hose Connection with a conical cap



A	HEX	L	L1	L2	D	G	Cap color	References POM	References CHEM
4 x 6	17	56	6	7	25.5	M10x1	Standard	21KBKO06DPX	21KBKO06FVX
6 x 8	17	56	6	7	25.5	M12x1	Standard	21KBKO08DPX	21KBKO08FVX

21KBKO


Coupler with valve, with Plastic Hose Connection with a cylindrical cap



A	HEX	L	L1	L2	D	Cap color	References POM	References CHEM
4 x 6	17	56	6	7	21	Red ●	21KBKO06DPXGR	

21KBKS


Coupler with valve, Panel Mount with Plastic Hose Connection



A	HEX	HEX1	L	L1	L2	D	B	G	Cap color	References POM	References CHEM
4 x 6	17	14	68	7	18	25.5	4	M10x1	Standard	21KBKS06DPX	
6 x 8	17	17	68	7	18	25.5	4	M12x1	Standard	21KBKS08DPX	21KBKS08FVX

21KBTS


Coupler with valve, Panel Mount with Hose Barb with conical cap



A	HEX	HEX1	L	L1	L2	D	B	G	Cap color	References POM	References CHEM
6	17	14	74	17	14	25.5	4	M10x1	Standard	21KBTS06DPX	

21KBTE


Coupler with valve, Panel Mount for Hose Barb for Front Panel Installation



A	HEX	HEX1	L	L1	L2	D	B	G	Cap color	References POM	References CHEM
4	17	27	60	17	20.5	28	7	M25x1	Standard		21KBTE04FVX
6	17	27	60	17	20.5	28	7	M25x1	Standard	21KBTE06DPX	
8	17	27	60	17	20.5	28	7	M25x1	Standard	21KBTE08DPX	

21KBTF


Coupler with valve, Hose Barb with a conical cap



A	HEX	L	L1	D	Cap color	References POM	References CHEM
4	17	60	17	25.5	Standard	21KBTF04DPX	21KBTF04FVX
6	17	60	17	25.5	Standard	21KBTF06DPX	21KBTF06FVX

21KBTF


Coupler with valve, Hose Barb with a cylindrical cap



A	HEX	L	L1	D	Cap color	References POM
6	17	60	17	21	Blue ●	21KBTF06DPXGB
6	17	60	17	21	Red ●	21KBTF06DPXGR

21SBAW


Plug with valve, Male Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/8	17	36	7	Standard	21SBAW10DPX	21SBAW10FVX
G1/8	17	36	7	Blue ●	21SBAW10DPXB	21SBAW10FVXB
G1/8	17	36	7	Red ●		21SBAW10FVXR
G1/4	17	38	7	Standard	21SBAW13DPX	21SBAW13FVX

21SBIW


Plug with valve, Female Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/4	17	42	10	Standard	21SBIW13DPX	21SBIW13FVX
G1/4	17	42	10	Blue ●	21SBIW13DPXB	21SBIW13FVXB
G1/4	17	42	10	Red ●	21SBIW13DPXR	21SBIW13FVXR

21SBKO


Plug with valve, with Plastic Hose Connection



A	HEX	L	L1	L2	Cap color	References POM	References CHEM
4 x 6	17	42	7	6	Standard	21SBKO06DPX	21SBKO06FVX
6 x 8	17	42	7	6	Standard	21SBKO08DPX	21SBKO08FVX

21SBKS


Plug with Valve, Panel mount with Plastic Hose Connection



A	HEX	HEX1	L	L1	L2	B	G	Cap color	References POM
4 x 6	17	14	54	7	18	4	M10x1	Standard	21SBKS06DPX

21SBTF


Plug with valve, Hose Barb



A	HEX	L	L1	Cap color	References POM	References CHEM
4	17	46	17	Standard		21SBTF04FVX
6	17	46	17	Standard	21SBTF06DPX	21SBTF06FVX
6	17	46	17	Blue ●		21SBTF06FVXB
6	17	46	17	Red ●		21SBTF06FVXR

21SBTS


Plug with Valve, Panel mount, Hose Barb



A	HEX	HEX1	L	L1	L2	B	G	Cap color	References CHEM
4	17	14	60	7	14	4	M10x1	Standard	21SBTS04FVX

21SFAW


Plug without valve, Male Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/8	14	25	7	Standard		21SFAW10FXX
G1/8	17	36	7	Red ●	21SFAW10DPXR	
G1/4	17	28	9	Standard		21SFAW13FXX
G1/4	17	38	7	Red ●	21SFAW13DPXR	21SFAW13FVXR

21SFIW


Plug without valve, Male Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/8	14	24	8	Standard		21SFIW10FXX
G1/8	17	36	7	Blue ●	21SFIW10DPXB	21SFIW10FVXB
G1/8	17	36	7	Red ●	21SFIW10DPXR	21SFIW10FVXR
G1/4	17	25	9	Standard	21SFIW13DXX	
G1/4	17	25	9	Blue ●	21SFIW13DXXB	21SFIW13FXXB
G1/4	17	25	9	Red ●	21SFIW13DXXR	

21SFTF


Plug without valve, Hose Barb



A	L	L1	Cap color	References POM	References CHEM
4	32	17	Standard	21SFTF04DXX	21SFTF04FXX
6	32	17	Standard	21SFTF06DXX	21SFTF06FXX

48KBAW


Coupler with valve, Male Thread



A	HEX	L	L1	D	Cap color	References POM	References CHEM	References CHEM +
G1/4	21	70.5	9	26	Standard	48KBAW13DPX	48KBAW13FVX	
G1/4	21	70.5	9	26	Blue ●	48KBAW13DPXB		
G3/8	21	67	9	26	Standard	48KBAW17DPX	48KBAW17FVX	
G1/2	21	73.5	12	26	Standard	48KBAW21DPX	48KBAW21FVX	48KBAW21FVP

48KBIW


Coupler with valve, Female Thread



A	HEX	L	L1	D	Cap color	References POM	References CHEM	References CHEM +
G1/4	21	63.5	10	26	Standard	48KBIW13DPX	48KBIW13FVX	48KBIW13FVP
G1/4	21	63.5	10	26	Red ●	48KBIW13DPXR		
G1/4	21	63.5	10	26	Blue ●	48KBIW13DPXB		
G3/8	21	63.5	13	26	Standard	48KBIW17DPX	48KBIW17FVX	48KBIW17FVP
G3/8	21	63.5	13	26	Red ●	48KBIW17DPXR		
G3/8	21	63.5	13	26	Blue ●	48KBIW17DPXB		
G1/2	21	74.5	13	26	Standard	48KBIW21DPX	48KBIW21FVX	48KBIW21FVP
G1/2	21	74.5	13	26	Red ●		48KBIW21FVXR	
G1/2	21	74.5	13	26	Blue ●		48KBIW21FVXB	

48KBTF


Coupler with valve, Hose Barb



A	HEX	L	L1	D	Cap color	References POM	References CHEM	References CHEM +
4	21	74	71	26	Standard			48KBTF04FVP
6	21	81	22	26	Standard	48KBTF06DPX		48KBTF06FVP
9	21	81	22	26	Standard	48KBTF09DPX	48KBTF09FVX	48KBTF09FVP
13	21	84	25	26	Standard	48KBTF13DPX	48KBTF13FVX	

48KFIW


Coupler without valve, Female Thread



A	HEX	L	L1	D	Cap color	References POM	References CHEM
G3/8	21	63.5	13	26	Standard	48KFIW17DPX	48KFIW17FVX

48KFTF


Coupler without valve, Hose Barb



A	HEX	L	L1	D	Cap color	References CHEM +
4	21	74	71	26	Standard	48KFTF04FVP
6	21	81	22	26	Standard	48KFTF06FVP
9	21	81	22	26	Standard	48KFTF09FVP

48SBAW


Plug with valve, Male Thread



A	HEX	L	L1	Cap color	References POM	References CHEM	References CHEM +
G1/4	21	55	9	Standard	48SBAW13DPX	48SBAW13FVX	48SBAW13FVP
G1/4	21	55	9	Red ●	48SBAW13DPXR		
G3/8	21	51.5	9	Standard	48SBAW17DPX	48SBAW17FVX	48SBAW17FVP
G3/8	21	51.5	9	Red ●			48SBAW17FVPR
G1/2	21	58	12	Standard	48SBAW21DPX	48SBAW21FVX	48SBAW21FVP
G1/2	21	58	12	Red ●		48SBAW21FVXR	

48SBIW


Plug with valve, Female Thread



A	HEX	L	L1	Cap color	References POM	References CHEM	References CHEM +
G1/4	21	48	10	Standard	48SBIW13DPX	48SBIW13FVX	
G1/4	21	48	10	Red ●	48SBIW13DPXR		
G1/4	21	48	10	Blue ●	48SBIW13DPXB		
G3/8	21	48	10	Standard	48SBIW17DPX	48SBIW17FVX	48SBIW17FVP
G3/8	21	48	10	Red ●	48SBIW17DPXR		
G3/8	21	48	10	Blue ●	48SBIW17DPXB		
G1/2	21	59	13	Standard	48SBIW21DPX	48SBIW21FVX	48SBIW21FVP

48SBTF


Plug with valve, Hose Barb



A	HEX	L	L1	Cap color	References POM	References CHEM	References CHEM +
6	21	65.5	22	Standard	48SBTF06DPX	48SBTF06FVX	
9	21	65.5	22	Standard	48SBTF09DPX	48SBTF09FVX	
9	21	65.5	22	Blue ●		48SBTF09FVXB	
13	21	68.5	25	Standard	48SBTF13DPX	48SBTF13FVX	48SBTF13FVP

48SFAW


Plug without valve, Male Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/4	17	38.5	9	Standard	48SFAW13DXX	
G3/8	21	38.5	9	Standard	48SFAW17DXX	48SFAW17FXX

48SFIW


Plug without valve, Female Thread



A	HEX	L	L1	Cap color	References POM	References CHEM
G1/4	21	48	10	Red ●	48SFIW13DPXR	48SFIW13FVXR
G3/8	21	35.5	10	Standard	48SFIW17DXX	48SFIW17FXX
G3/8	21	35.5	10	Red ●	48SFIW17DXXR	48SFIW17FXXR
G1/2	24	41.5	12	Standard	48SFIW21DXX	

48SFTF


Plug without valve, Hose Barb



A	L	L1	D	Cap color	References POM	References CHEM
6	47	22	18	Standard		48SFTF06FXX
9	47	22	18	Standard	48SFTF09DXX	48SFTF09FXX
13	50	25	18	Standard	48SFTF13DXX	

70KBIW


Coupler with valve, Female Thread



A	HEX	L	L1	D	References POM
G1/4	19	57.5	10	29	72KBIW13DPX
G3/8	22	64	11.5	35	73KBIW17DPX
G1/2	27	76	16	44.5	74KBIW21DPX
G3/4	34	96	24	55	75KBIW26DPX
G1	41	105.5	24	62	76KBIW33DPX

70SBIW

Plug with valve, Female Thread



A	HEX	L	L1	References POM
G1/4	19	35	10	72SBIW13DPX
G3/8	22	39	11.5	73SBIW17DPX
G1/2	27	48	16	74SBIW21DPX
G3/4	36	60	24	75SBIW26DPX
G1	41	56	24	76SBIW33DPX



Flat Face (or anti-pollution) couplers have no retention area between the coupler and the plug. This design prevents dripping when disconnected, making it ideal for aggressive fluids and clean environments such as cooling applications.

Technical specifications



Fluids: industrial water with or without glycol



Operating pressure: up to 15 bar (8 bar series 21)



Operating temperature:

-20°C to +100°C (NBR),

-40°C to +150°C (EPDM),

-15°C to +200°C (FKM)



Functions: KL



Regulations: RoHS, REACH

Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
4	Rectus	4.5	204	204
5	EURO	2.7	21	21
6	Rectus	8.9	206	206
7.8	EURO	7.1	25	25
9	Rectus	27	209	209


* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.


Benefits

- **Flat-face design at the coupler/plug junction:**
 - Elimination of dripping during disconnection, ensuring safety and cleanliness in sensitive environments.
 - No air pockets at the connection, preserving the quality of the fluid and ensuring its integrity.

Components materials

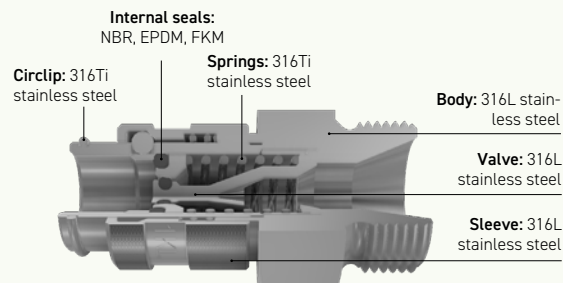

Recommended applications

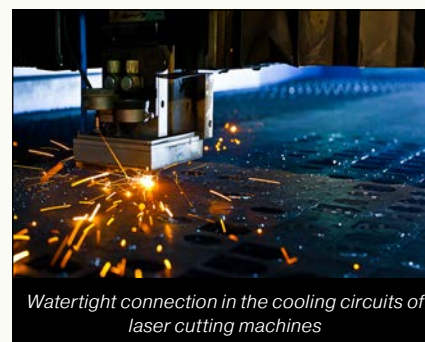

VERSION FLAT FACE CARTRIDGE



Nominal diameter (mm)	Profile	Flow rate (NL/min)*	Series coupler	Plugs series
3	Rectus	1.2	203	203
4	Rectus	4.5	204	204
6	Rectus	8.9	206	206
9	Rectus	27	209	209


* Inlet pressure at 6 bar, pressure drop of 0.5 bar.

Performance depends on the fluids, materials and tube used.

Benefits


- **Compatible with plate or modular press mounting**, optimising the available space.
- **Allows different diameters to be combined** within the same assembly, for greater flexibility in machine design.

Components materials

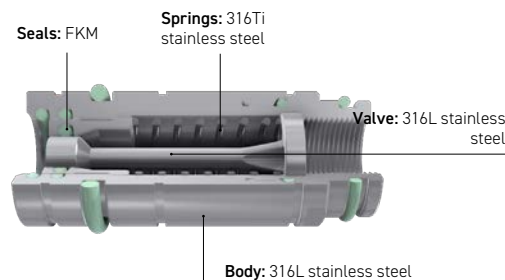


Technical specifications for plate and housing assemblies

Block assembly

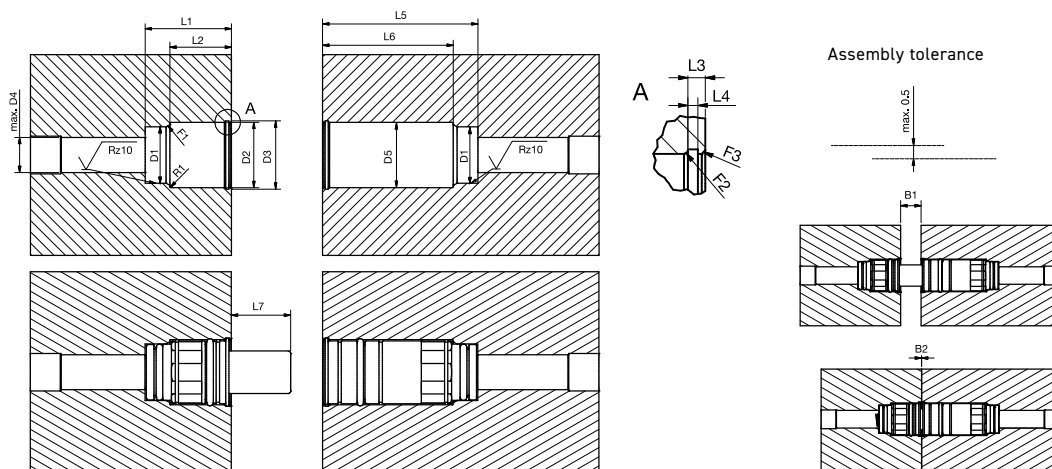

DN mm	L1 mm	L2 mm	L3 mm	L4 mm	L5 mm	L6 mm	L7 mm	D1 mm	D2 mm	D3 mm	D4 max. mm	D5 mm	R1 max. mm	F1	F2	F3	B1	B2
3	20.10	15.00	2.10	1.10	23.60	18.50	8.75	10.00	12.00	12.50	8.00	12.00	0.50	0.8x30°	—	0.5x45°	5.00	0
4	29.00	22.50	2.10	1.10	37.80	31.35	13.00	14.00	17.00	17.80	10.00	17.00	0.50	1.2x30°	0.5x30°	0.5x45°	8.65	0
6	34.25	26.65	2.10	1.10	55.80	48.20	17.00	18.50	22.00	23.00	12.00	22.00	0.50	1.3x30°	0.5x30°	0.5x45°	11.40	0
9	33.80	24.30	2.30	1.30	61.30	51.80	23.60	22.50	26.00	27.20	14.00	26.00	0.50	1.5x30°	0.5x30°	0.5x45°	16.30	0
12	44.00	34.40	2.30	1.30	73.20	63.60	25.80	28.00	31.00	32.70	16.00	33.00	0.50	1.5x30°	0.8x30°	0.5x45°	15.80	0
19	53.15	41.50	3.15	1.85	80.20	68.50	29.25	33.00	42.00	44.50	23.00	45.00	1.50	1.5x30°	1.0x30°	0.8x45°	20.30	0

Plate assembly

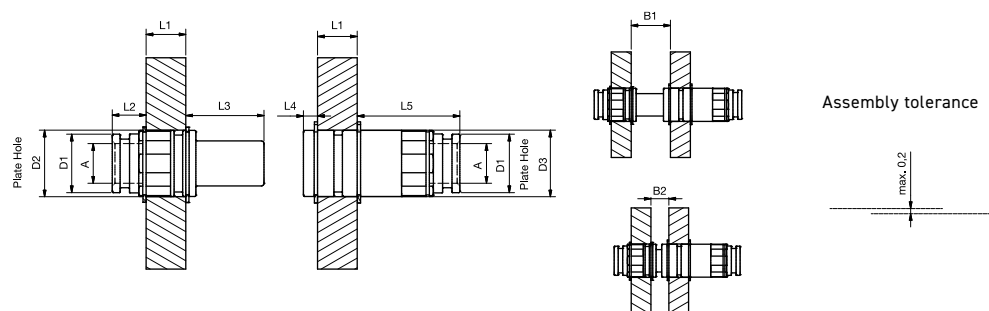


DN mm	L1 mm	L2 mm	L3 mm	L4 mm	L5 mm	D1 mm	D2 mm	D3 mm	Connection A	B1	B2
3	5.00	11.00	12.75	5.50	11.00	9.80	11.2	11.2	G 1/16	16.70	11.70
4	15.00	9.80	17.20	5.50	15.35	13.80	16.2	16.2	G 1/8	20.50	12.70
6	15.00	13.15	23.00	5.50	33.20	18.30	21.2	21.2	G 1/4	25.00	13.50
9	15.00	12.80	29.60	5.30	38.80	22.30	25.2	25.2	G 3/8	29.80	13.50
12	15.00	22.90	31.80	5.30	50.60	27.80	30.2	32.2	G 1/2	29.40	12.30
19	15.00	32.00	35.40	4.40	57.60	32.80	41.2	44.2	G 3/4	33.85	12.30

SELECTION GUIDE

Reminder of the part number identification

e.g. 21KLIW13EEX

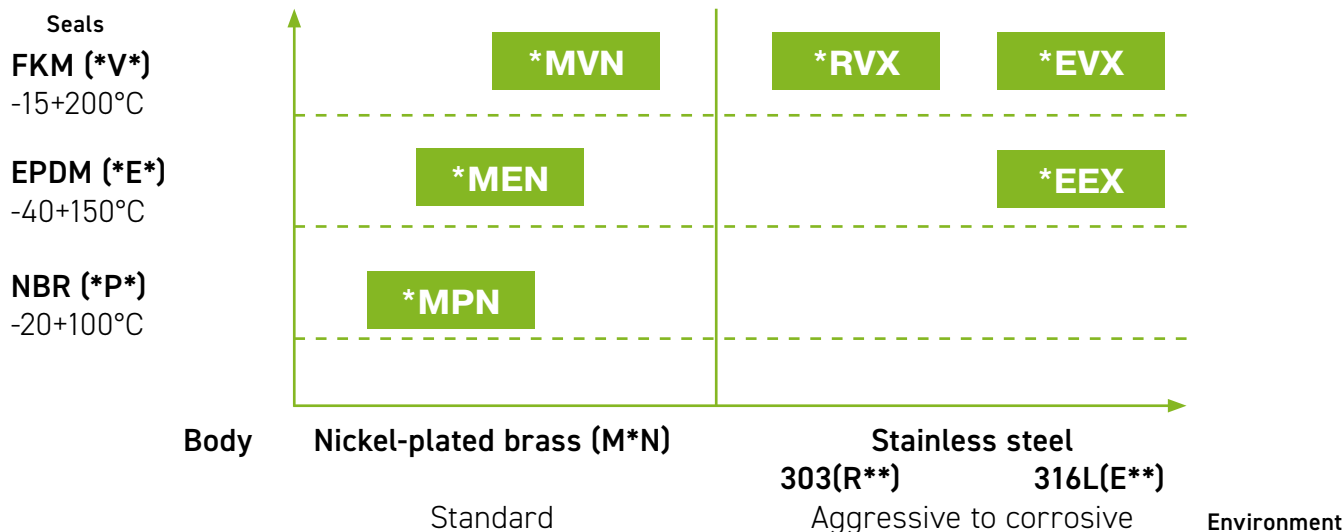**204KLAW****Coupler with valve, Male Thread**

Nickel-plated brass or stainless steel, EPDM, FKM



Scan for more dimensions



DN	A	References
4	G1/8	204KLAW10MEN
	G1/8	204KLAW10EEX
	G1/8	204KLAW10EVX
	G1/4	204KLAW13MEN
	G1/4	204KLAW13EVX

204KLIW**Coupler with valve, Female Thread**

Nickel-plated brass or stainless steel, EPDM, FKM



Scan for more dimensions



DN	A	References
4	G1/8	204KLIW10MEN
	G1/8	204KLIW10MVN
	G1/8	204KLIW10EVX
	G1/4	204KLIW13MEN
	G1/4	204KLIW13EVX

204SLAW**Plug with valve, Male Thread**

Nickel-plated brass or stainless steel, EPDM, FKM



Scan for more dimensions



DN	A	References
4	G1/8	204SLAW10MEN
	G1/8	204SLAW10EEX
	G1/8	204SLAW10EVX
	G1/4	204SLAW13MEN
	G1/4	204SLAW13EVX

204SLIW**Plug with valve, Female Thread**

Nickel-plated brass or stainless steel, EPDM, FKM



Scan for more dimensions



DN	A	References
4	G1/8	204SLIW10MEN
	G1/8	204SLIW10MVN
	G1/8	204SLIW10EEX
	G1/8	204SLIW10EVX
	G1/4	204SLIW13MEN
	G1/4	204SLIW13EVX

21KLAW

Coupler with valve, Male Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KLAW10MPN
G1/4	21KLAW13MPN
	21KLAW13RVX
	21KLAW17MPN
G3/8	21KLAW17MEN
	21KLAW17MVN
	21KLAW17RVX
	21KLAW17EVX

21KLIW

Coupler with valve, Female Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21KLIW10MPN
	21KLIW10MEN
	21KLIW10MVN
	21KLIW10RVX
	21KLIW10EEX
	21KLIW10EVX
	21KLIW13MPN
G1/4	21KLIW13RVX
	21KLIW13EEX
	21KLIW13EVX
G3/8	21KLIW17MPN
	21KLIW17EVX

21KLKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21KLKO06MPN
	21KLKO06MEN
	21KLKO06RVX
	21KLKO06EVX
	21KLKO08MPN
6 x 8	21KLKO08MVN
	21KLKO08RVX
	21KLKO08EEX
	21KLKO08EVX

21KLKS

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
4 x 6	21KLKS06MPN
	21KLKS06MEN
	21KLKS06EVX
6 x 8	21KLKS08RVX

21KLTF

Coupler with valve, Hose Barb

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
4	21KLTF04MVN
	21KLTF06MPN
6	21KLTF06MEN
	21KLTF06RVX
	21KLTF06EVX
8	21KLTF08MVN
	21KLTF08EVX
9	21KLTF09MPN
10	21KLTF10EVX

21KLTS

Coupler with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
4	21KLTS04MPN
	21KLTS04MEN
5	21KLTS05MPN
6	21KLTS06MPN
	21KLTS06MEN

21KLKK

Coupler with valve, with Plastic Hose Connection with Spring Guard

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
6 x 8	21KLKK08RVX

21SLAK

Plug with valve, Male Thread

Nickel-plated brass, EPDM



Scan for more dimensions



A	References
R1/4	21SLAK13MEN

21SLAW

Plug with valve, Male Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SLAW10MPN
	21SLAW10MEN
	21SLAW10MVN
	21SLAW10EEX
	21SLAW10EVX
G1/4	21SLAW10RVX
	21SLAW13MPN
	21SLAW13MEN
G3/8	21SLAW13EVX
	21SLAW13RVX
	21SLAW17MPN
	21SLAW17EVX

21SLKO

Plug with valve, with Plastic Hose Connection

Nickel-plated brass or stainless steel, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21SLKO06MPN
	21SLKO06RVX
	21SLKO06EVX
6 x 8	21SLKO08MPN
	21SLKO08RVX
	21SLKO08EVX

21SLTS

Plug with valve, Panel Mount with Hose Barb

Nickel-plated brass, NBR



Scan for more dimensions



A	References
5	21SLTS05MPN
6	21SLTS06MPN

21SLAN

Plug with valve, Male Thread

Stainless steel, FKM



Scan for more dimensions



A	References
1/4"	21SLAN13RVX
	21SLAN13EVX

21SLIW

Plug with valve, Female Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/8	21SLIW10MPN
	21SLIW10MEN
	21SLIW10RVX
	21SLIW10EVX
G1/4	21SLIW13MPN
	21SLIW13MEN
G3/8	21SLIW17EVX

21SLKS

Plug with valve, Panel Mount with Plastic Hose Connection

Nickel-plated brass or stainless steel, NBR, FKM



Scan for more dimensions



A	References
4 x 6	21SLKS06MPN
	21SLKS06RVX
6 x 8	21SLKS08MPN
	21SLKS08RVX

21SLAO

Plug with valve, Male Thread

Nickel-plated brass, EPDM



Scan for more dimensions



A	References
G1/8	21SLAO10MEN

21SLKK

Plug with valve, Plastic Hose Connection with Spring Guard

Nickel-plated brass, NBR



Scan for more dimensions



A	References
6 x 8	21SLKK08MPN

21SLTF

Plug with valve, Hose Barb

Nickel-plated brass or stainless steel, NBR, FKM



Scan for more dimensions



A	References
6	21SLTF06MPN
	21SLTF06MVN
	21SLTF06RVN
	21SLTF06EVX
8	21SLTF08RVX
9	21SLTF09MPN
	21SLTF09EVX
10	21SLTF10MPN

206KLAW**Coupler with valve, Male Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
6	G3/8	206KLAW17MPN
	G3/8	206KLAW17MEN
	G3/8	206KLAW17EEX
	G3/8	206KLAW17EVX
	G1/2	206KLAW21MPN
	G1/2	206KLAW21EVX

206KLIW**Coupler with valve, Female Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
6	G3/8	206KLIW17MPN
	G3/8	206KLIW17MEN
	G3/8	206KLIW17MVN
	G3/8	206KLIW17EEX
	G3/8	206KLIW17EVX
	G1/2	206KLIW21MPN
	G1/2	206KLIW21EVX

206SLAW**Plug with valve, Male Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
6	G3/8	206SLAW17MPN
	G3/8	206SLAW17MEN
	G3/8	206SLAW17MVN
	G3/8	206SLAW17EEX
	G3/8	206SLAW17EVX
	G1/2	206SLAW21MPN
	G1/2	206SLAW21EEX
	G1/2	206SLAW21EVX

206SLIW**Plug with valve, Female Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
6	G3/8	206SLIW17MPN
	G3/8	206SLIW17MEN
	G3/8	206SLIW17EVX
	G1/2	206SLIW21MPN
	G1/2	206SLIW21EVX

25KLAK

Coupler with valve, Male Thread

Nickel-plated brass, NBR, EPDM



Scan for more dimensions



A	References
R1/4	25KLAK13MPN
	25KLAK13MEN
	25KLAK13MVN
R3/8	25KLAK17MPN

25KLAW

Coupler with valve, Male Thread

Stainless steel, FKM



Scan for more dimensions



A	References
G1/4	25KLAW13RVX
	25KLAW13EVX
	25KLAW17RVX
G3/8	25KLAW17EVX
G1/2	25KLAW21RVX
	25KLAW21EVX

25KLIW

Coupler with valve, Female Thread

Nickel-plated brass or stainless steel, NBR, FKM



Scan for more dimensions



A	References
G1/4	25KLIW13MPN
	25KLIW13RVX
	25KLIW13EVX
G3/8	25KLIW17MPN
	25KLIW17RVX
	25KLIW17EVX
G1/2	25KLIW21MPN
	25KLIW21BVN
	25KLIW21RVX
	25KLIW21EVX

25KLKO

Coupler with valve, with Plastic Hose Connection

Nickel-plated brass, EPDM



Scan for more dimensions



A	References
6 x 8	25KLKO08MEN

25KLTF

Coupler with valve, Hose Barb

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
6	25KLTF06MPN
8	25KLTF08BPN
	25KLTF08RVX
9	25KLTF09MPN
	25KLTF09RVX
	25KLTF09EVX
10	25KLTF10MPN
13	25KLTF13MPN
	25KLTF13MEN
	25KLTF13RVX
	25KLTF13EVX

25SLAK

Plug with valve, Male Thread

Nickel-plated brass, EPDM



Scan for more dimensions



A	References
R1/4	25SLAK13MEN

25SLAW

Plug with valve, Male Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



A	References
G1/4	25SLAW13MPN
	25SLAW13MVN
	25SLAW13RVX
	25SLAW13EVX
G3/8	25SLAW17MPN
	25SLAW17MEN
	25SLAW17RVX
	25SLAW17EVX
G1/2	25SLAW21MPN
	25SLAW21RVX
	25SLAW21EVX

25SLIW

Plug with valve, Female Thread

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions




A	References
G1/4	25SLIW13MPN
	25SLIW13RVX
	25SLIW13EVX
G3/8	25SLIW17MPN
	25SLIW17RVX
	25SLIW17EVX
G1/2	25SLIW21MVN
	25SLIW21REX
	25SLIW21RVX
	25SLIW21EVX

25SLTF

Plug with valve, Hose Barb

Nickel-plated brass or stainless steel, NBR, FKM



Scan for more dimensions



A	References
8	25SLTF08RVX
9	25SLTF09RVX
10	25SLTF10MPN
13	25SLTF13EVX

209KLIW**Coupler with valve, Female Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
9	G1/2	209KLIW21MPN
	G1/2	209KLIW21MEN
	G1/2	209KLIW21EEX
	G1/2	209KLIW21EVX
	G3/4	209KLIW26MPN
	G3/4	209KLIW26MEN
	G3/4	209KLIW26EVX

209SLIW**Plug with valve, Female Thread**

Nickel-plated brass or stainless steel, NBR, EPDM, FKM



Scan for more dimensions



DN	A	References
9	G1/2	209SLIW21MPN
	G1/2	209SLIW21MEN
	G1/2	209SLIW21EEX
	G1/2	209SLIW21EVX
	G3/4	209SLIW26MPN
	G3/4	209SLIW26MEN
	G3/4	209SLIW26EVX

DRY-BREAK-CARTRIDGE COUPLINGS VERSIONS**200KLIWEK****Coupler with valve, Female Thread**

Stainless steel AISI 316 L, FKM



Scan for more dimensions



DN	A	References
3	G1/16	203KLIW08EVXEK
4	G1/8	204KLIW10EVXEK
6	G1/4	206KLIW13EVXEK
9	G3/8	209KLIW17EVXEK

200SLIWEK**Plug with valve, Female Thread**

Stainless steel AISI 316 L, FKM



Scan for more dimensions



DN	A	References
3	G1/16	203SLIW08EVXEK
4	G1/8	204SLIW10EVXEK
6	G1/4	206SLIW13EVXEK
9	G3/8	209SLIW17EVXEK

05

HISTORICAL EXPERTISE

For 90 years, Legris valves have been recognised for their quality thanks to the design of their wear compensation seal, which guarantees the product's long-lasting watertightness.

CONSISTENT QUALITY

Legris valves guarantee performance and reliability thanks to controlled manufacturing processes and rigorous quality controls, ensuring optimal use of your installations.

A WIDE RANGE OF PRODUCTS AT YOUR FINGERTIPS

Three technologies are available to meet the needs of standard to the most demanding applications and are accessible through our distribution network.



LEGRIS VALVES



PRODUCTS OFFER

LEGRIS VALVES		Connection	Fluids	Materials (body/seal)	Maximum operating pressure (bar)	Temperature		PAGE	
						Min.	Max.		
Ball valves LONG-HANDLED	Valves 		G1/8 to G1	 Compressed air and neutral gases Industrial water and treated water Oils and lubricants	Nickel-plated brass/NBR	40	-20°C	+80°C	226
	High-temperature valves 		G1/4 to G2 G1/4 to G1 Rp1/4 to Rp2	 Compressed air Industrial water and treated water	Nickel-plated brass/PTFE or 316L stainless steel/PTFE	140	-20°C	+170°C	232
Ball valves SHORT HANDLE	POLYMERS	Mini valves 	G1/8 to G1/2	 Compressed air and neutral gases	Nickel-plated brass/NBR engineering polymer	10	-20°C	+80°C	234
		LIQUIfit® valves 	NPTF1/4 to NPTF3/8	 Industrial water and treated water	Polypropylene/EPDM	10	-10°C	+95°C	235
	METALLIC	Brass valves 	G1/4 to G3/4	 Compressed air and neutral gases	Raw stamped brass	12	-20°C	+80°C	239
		Treated brass valves 	G1/4 to G1	 Compressed air and neutral gases, industrial water	Nickel-plated brass, NBR Nickel-plated brass/PTFE	30	-20°C	+90°C	238
		Stainless steel valves 	G1/4 to G1/2	 Compressed air and neutral gases Industrial water Oils and lubricants	303 stainless steel/PTFE	20	-20°C	+120°C	239
	Ball valves SPECIFIC	Combustible gas valves (DVGW) 		G1/4 to G2	 Combustible gases	Nickel-plated brass/PTFE and FKM	40	-40°C	+170°C
Oxygen Valves 		Olive from 10 to 22 mm	 Technical gases	Nickel-plated brass/EPDM	12	-20°C	+80°C	244	
Needle valves VALVES	Needle valves 		G1/8 to G1/2 M10x1 to M16x1.5	 Compressed air Industrial water	Nickel-plated brass or 316L stainless steel/PTFE	400	-20°C	+180°C	246
Axial VALVES	Axial valves 		Rp3/8 to Rp2	 Compressed air and neutral gases Industrial water Oils and lubricants	Nickel-plated brass/FKM or EPDM	10	-20°C	+150°C	248

HOW TO CHOOSE YOUR LEGRIS VALVE

What type of fluid do you wish to convey?



Parker offers ranges dedicated to **compressed air and neutral gases**.



Parker presents ranges specifically designed for **water**, including:

- Industrial water (tap water)
- Treated water (deionised, pure and demineralised)

All our solutions are compatible with glycol mixtures.



Parker also has ranges compatible with **technical gases**:

- Oxygen, breathing air, carbon dioxide, analytical gases, anaesthetic gases and inert gases.



Parker offers ranges for **oils and lubricants**.

Do you have any compliance requirements?

- All our products comply with RoHS and REACH standards.
- Our product ranges dedicated to specific markets, such as food, medical or clean rooms, comply with the relevant regulations.
- The range of specific gas valves (DVGW) complies with the DIN EN 331 standard.
- All our processes comply with ISO 9001 and ISO 14001 standards.

For a complete list of our certificates, [please click here](#).




Under what conditions do you use your valve?


Legris valve ranges are designed to withstand a variety of environments.

Below you will find recommended products for conveying air, water and gases according to specific usage constraints.

Long handle

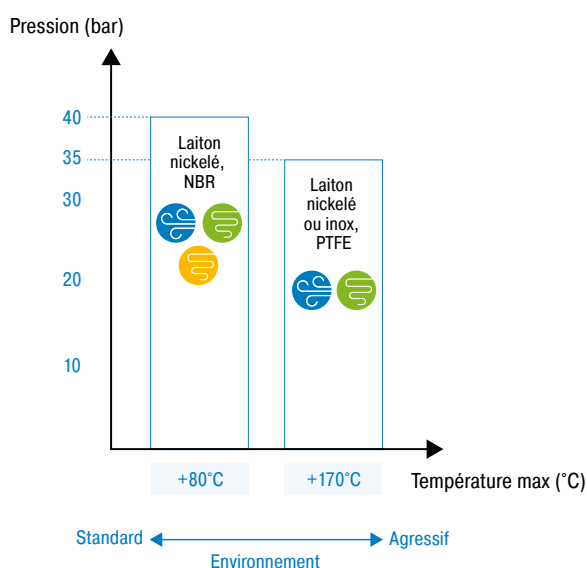

Short handle

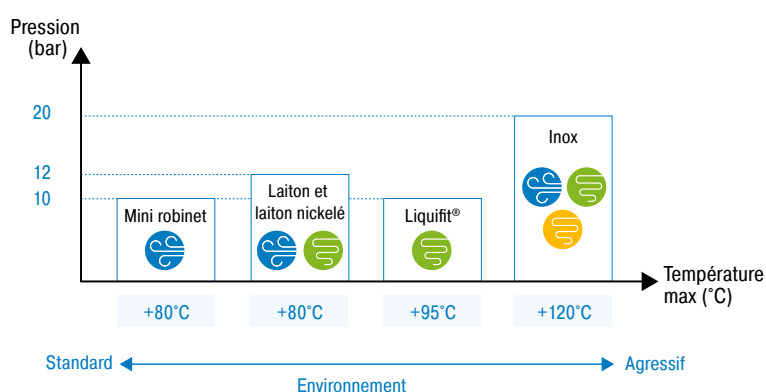


VALVE TECHNOLOGIES AND THEIR SPECIAL FEATURES

Ball valve

This valve uses a ball with a hole in it that pivots to open or close the fluid pass, providing a quick and reliable seal.




Valve open position



Valve closed position

Legris valves are equipped with **wear compensation seals on the cap** to ensure a long-lasting seal.

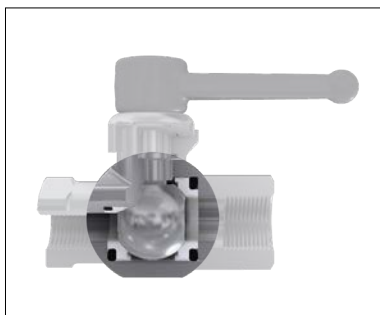


The nitrile seals, assembled under tension, exert constant pressure on the wear compensation o-rings to ensure a tight seal.

Seals can always be dismantled and reassembled using seal kits sold as spare parts.

Vocabulary related to “2/2, 3/2 and 3/3 way” valves


2/2: 2 outputs/2 handle positions

(opening/closing)




3/2: 3 outputs/2 handle positions

(left pass, right pass, no closed position)



3/3: 3 outputs/3 handle positions

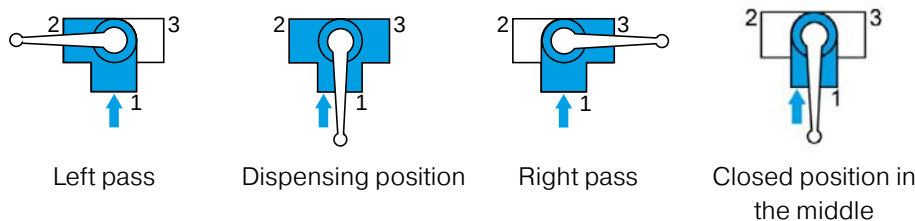

Left pass

Dispensing position

Right pass


Closed position in the middle

Needle valve

This valve precisely controls the flow rate thanks to a conical rod (needle) that inserts into a seat, allowing for fine and gradual adjustment.




Valve open position




Valve closed position

Axial valve

This valve regulates flow by moving a piston along the axis of the pass, ensuring fluid control and low pressure drop.



Axial valve position open



Axial valve position closed

Part number identification

Each valve is identified by:

- item type (4 digits);
- the nominal diameter;
- the thread code. If the product does not have a thread, the code used is 00.

0402

Item type

Example:
040x
050x
79xx
//
42xx
BVGx

04

Nominal
diameter

04 = 4 mm
05 = 6 mm
...
40 = 40 mm

10

Thread code

10 = 1/8"
13 = 1/4"
...
48 = 2"



Legris ball valves are equipped with long handles specially designed for easy operation. Available in several diameters and connection types, they are suitable for both standard applications and specific uses.

NICKEL-PLATED BRASS STANDARDS VERSIONS

Technical specifications



Fluids: compressed air and other fluids



Operating pressure: 10⁻² millibar to 40 bar



Operating temperature: -20 to +80°C



Nominal diameter (DN): 4 to 50 mm




Connection: G1/8 to G2



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

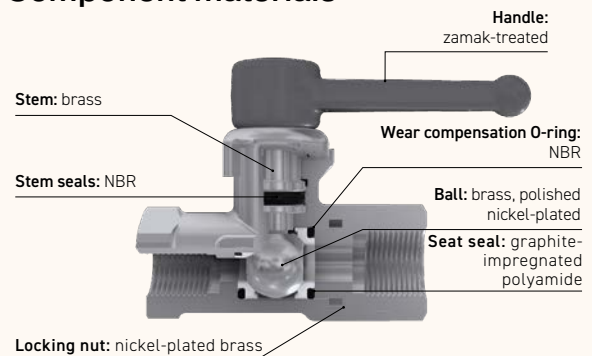

Benefits

- **Durability:** valves equipped with wear compensation seals for **long-lasting tightness (not only for water)** of the product.
- **Optimal operation guaranteed down to -40°C**, with no handle operation after installation.
- **Reliability:** all valves are individually tested and then marked to certify that they have been checked and to ensure traceability.
- **Ease of operation:** reduced friction coefficient thanks to graphite-coated polyamide seat seals and nickel-plated brass ball polishing.
- **Numerous versions available:** 2/2, 3/2, 3/3, with vent, lockable, to offer a Legris solution for every application.

Recommended applications



VENTED VERSION, WITH RED HANDLE

Valves equipped with a vent can be identified by their red handle.


To stop the fluid circulation and vent the circuit, 2 venting systems are provided:

- **threaded vent**, for collecting exhaust fluids
 - **pin-hole vent**, usable in all cases where there are no particular constraints
- A fluid direction marking indicates the direction of installation.




Operating principle

With vent connected to a tube = drain collected, without noise or pollution

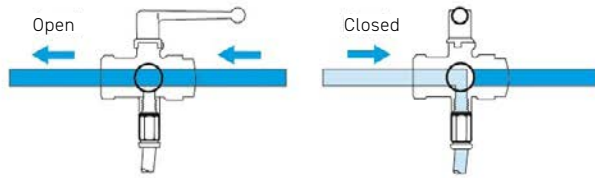

With vent connected to a silencer = noiseless discharge to atmosphere

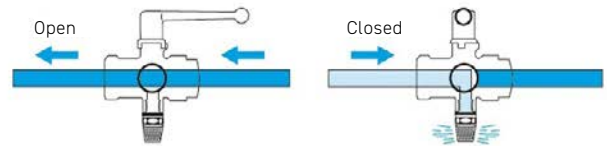

PADLOCKABLE VERSION

To protect your installations from unauthorised tampering, the lockable plate, which is attached to the stem, ensures compliance with the ISO 4414 safety standard.

Locking can be achieved using:

- **1 hook point in open or closed position:** models 0432 and 0439.

Simple locking when only one operator or team needs to lock the valve;

- **1, 2 or 3 attachment points in the closed position:** models 0437 and 0438.

Multiple locking (up to 3 points) when several people need to lock the valve simultaneously, thus ensuring enhanced safety.

Lockable valves are also available with and without vents.



LOCKABLE VERSION

Available with lock nut on BVG4-LOCK and BVG4P-LOCK models (version with vent)




VERSION WITH FIXING SCREWS

For assembly requiring attachment to sheet metal or a machine frame (model 6402).

On sheet metal plate:

- bulkhead fixing
- rear screw fixing




On frame:

- assemble with bolts

On wooden panel:

- woodscrew fastening

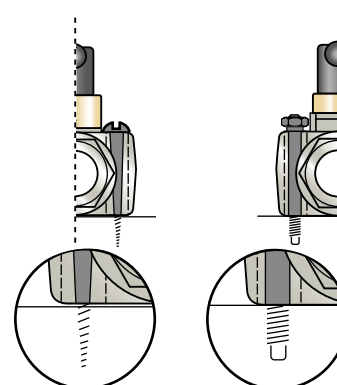

0400**2/2 In-Line Ball Valve, Male BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



ØD	C	References
4	G1/8	0400 04 10
7	G1/4	0400 07 13
10	G3/8	0400 10 17
13	G1/2	0400 13 21
18	G3/4	0400 18 27

Max. operating pressure: 40 bar

0402**2/2 In-Line Ball Valve, Female BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0402 04 10
7	G1/8	0402 07 10
	G1/4	0402 07 13
10	G3/8	0402 10 17
13	G1/2	0402 13 21
20	G3/4	0402 20 27
23	G1	0402 23 34
32	G1 1/4	0402 32 42*
	G1 1/2	0402 32 49*
40	G2	0402 40 48*

* CE-marked models

Max. operating pressure: 40 bar

0401**2/2 In-Line Ball Valve, Male/Female BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0401 04 10
5	G1/8	0401 05 10
7	G1/4	0401 07 13
10	G3/8	0401 10 17
13	G1/2	0401 13 21
18	G3/4	0401 18 27
23	G1	0401 23 34
32	G1 1/4	0401 32 42*

* CE-marked models

Max. operating pressure: 40 bar

0411**2/2 In-Line Ball Valve with Connections for Use with Steel Tubing**

Nickel-plated brass, NBR

Scan for more dimensions



DN	ØD	References
4	6	0411 04 06
6	8	0411 06 08
7	10	0411 07 10
10	12	0411 10 12

Max. operating pressure: 40 bar

0446**2/2 In-Line Panel-Mountable Ball Valve, Female BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0446 04 10*
7	G1/4	0446 07 13
10	G3/8	0446 10 17
13	G1/2	0446 13 21

Max. operating pressure: 20 bar

* Pour le modèle G1/8, l'épaisseur maximum de la cloison est de 3 mm.

0472**2/2 Right-Angled Ball Valve, Female BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0472 04 10
6	G1/4	0472 06 13
9	G3/8	0472 09 17
12	G1/2	0472 12 21
18	G3/4	0472 18 27
23	G1	0472 23 34

Max. operating pressure: 20 bar

0471**2/2 Right-Angled Ball Valve, Male/Female BSPP Thread**

Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0471 04 10
6	G1/4	0471 06 13
9	G3/8	0471 09 17
12	G1/2	0471 12 21
18	G3/4	0471 18 27
23	G1	0471 23 34

Max. operating pressure: 20 bar

0482**3/3 Right-Angle Ported Ball Valve, Female BSPP Thread**


Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0482 04 10
6	G1/4	0482 06 13
9	G3/8	0482 09 17
12	G1/2	0482 12 21
18	G3/4	0482 18 27
23	G1	0482 23 34

Max. operating pressure: 20 bar



0483

3/3 Right-Angle Ported Ball Valve Without Closed Position, Female BSPP Thread

Nickel-plated brass, NBR




Scan for more dimensions



DN	C	References
4	G1/8	0483 04 10
6	G1/4	0483 06 13
9	G3/8	0483 09 17
12	G1/2	0483 12 21
18	G3/4	0483 18 27
23	G1	0483 23 34

Max. operating pressure: 20 bar



0448

3/3 Panel-Mountable Right-Angled Ball Valve, Female BSPP Thread

Nickel-plated brass, NBR




Scan for more dimensions



DN	C	References
4	G1/8	0448 04 10*
6	G1/4	0448 06 13
9	G3/8	0448 09 17
12	G1/2	0448 12 21

Max. operating pressure: 20 bar
* G1/8 model: max. panel thickness = 3 mm.



0452

3/2 Panel-Mountable Equal Plane Ball Valve, Female BSPP Thread

Nickel-plated brass, NBR




Scan for more dimensions



DN	C	References
4	G1/8	0452 04 10
6	G1/4	0452 06 13

Max. operating pressure: 20 bar



Version with mounting insert

6402

2/2 In-Line Ball Valve for Screw Fixing, Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
4	G1/8	6402 04 10
7	G1/4	6402 07 13
10	G3/8	6402 10 17
13	G1/2	6402 13 21
20	G3/4	6402 20 27
23	G1	6402 23 34

Max. operating pressure: 40 bar

Exhaust versions

0489

3/2 In-Line Threaded Exhaust Port Ball Valve, Female BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C1	C	References
7	M5x0.8	G1/4	0489 07 13
10	M5x0.8	G3/8	0489 10 17
13	G1/8	G1/2	0489 13 21
18	G1/4	G3/4	0489 18 27
23	G1/4	G1	0489 23 34

Max. operating pressure: 40 bar

0449

3/2 Panel-Mountable In-Line Threaded Exhaust Port Ball Valve, Female BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C1	C	References
7	M5x0.8	G1/4	0449 07 13
10	M5x0.8	G3/8	0449 10 17
13	G1/8	G1/2	0449 13 21

Max. operating pressure: 20 bar

0469

3/2 In-Line Vented Ball Valve, Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
4	G1/8	0469 04 10
7	G1/4	0469 07 13
10	G3/8	0469 10 17
13	G1/2	0469 13 21
18	G3/4	0469 18 27
23	G1	0469 23 34

Max. operating pressure: 40 bar

0462

3/2 Right-Angled Ball Valve with Vent, Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
6	G1/8	0462 06 10
	G1/4	0462 06 13
9	G3/8	0462 09 17
12	G1/2	0462 12 21
18	G3/4	0462 18 27
23	G1	0462 23 34

Max. operating pressure: 20 bar

0461

3/2 Right-Angled Ball Valve with Vent, Male/Female BSPP Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
6	G1/8	0461 06 10
	G1/4	0461 06 13
9	G3/8	0461 09 17
12	G1/2	0461 12 21
18	G3/4	0461 18 27

Max. operating pressure: 20 bar

Lockable versions

0432

2/2 In-Line Lockable Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
4	G1/8	0432 04 10
7	G1/4	0432 07 13
10	G3/8	0432 10 17
13	G1/2	0432 13 21
20	G3/4	0432 20 27
23	G1	0432 23 34

Max. operating pressure: 40 bar
Non-removable lever, fixed plate and moving plate: zinc-plated steel

0439

3/2 In-line Vented Lockable Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
7	G1/4	0439 07 13
10	G3/8	0439 10 17
13	G1/2	0439 13 21
18	G3/4	0439 18 27
23	G1	0439 23 34

Max. operating pressure: 40 bar
Non-removable lever, fixed plate and moving plate: zinc-plated steel

0438

3/2 Right-Angled 3-Point Lockable Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
9	G3/8	0438 09 17
12	G1/2	0438 12 21
18	G3/4	0438 18 27
23	G1	0438 23 34

Max. operating pressure: 20 bar
Fixed plate: zinc-plated steel, moving plate: zinc-plated steel.
Removable lever: when the valve is installed close to a wall, the lever can be removed and repositioned in the opposite direction to the original assembly.

0436

3/2 In-Line 3-Point Lockable Ball Valve with Threaded Exhaust Port, Female BSPP and Metric Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C1	C	References
10	M5x0.8	G3/8	0436 10 17
13	G1/8	G1/2	0436 13 21
18	G1/4	G3/4	0436 18 27
23	G1/4	G1	0436 23 34

Max. operating pressure: 40 bar
Non-removable lever, fixed plate and moving plate: zinc-plated steel

0437

3/2 In-line Vented 3-Point Lockable Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
7	G1/4	0437 07 13
10	G3/8	0437 10 17
13	G1/2	0437 13 21
18	G3/4	0437 18 27
23	G1	0437 23 34

Max. operating pressure: 40 bar
Non-removable lever, fixed plate and moving plate: zinc-plated steel

BVG4-LOCK

2/2 In-Line Lockable Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
8	G1/4	BVG4-1/4LOCK
10	G3/8	BVG4-3/8LOCK
15	G1/2	BVG4-1/2LOCK
19	G3/4	BVG4-3/4LOCK
25	G1	BVG4-1LOCK

Dual FPM driver seal and operating temperature from -40°C to +170°C (peak).

BVG4P-LOCK

3/2 In-Line Lockable Vented Ball Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more dimensions



DN	C	References
8	G1/4	BVG4P-1/4LOCK
10	G3/8	BVG4P-3/8LOCK
15	G1/2	BVG4P-1/2LOCK
20	G3/4	BVG4P-3/4LOCK
25	G1	BVG4P-1LOCK

Operating pressure: 14 bar
Operating temperature: -10°C to +100°C



Legris high-temperature ball valves, equipped with PTFE seals, are designed to withstand high temperatures. Available in nickel-plated brass and stainless steel to meet the needs of demanding industrial applications. Made of 316L stainless steel to withstand aggressive fluids in corrosive industrial environments.

Technical specifications



Fluids: Compressed air, industrial water and treated water



Operating pressure: 0 to 140 bar



Operating temperature: -20 to +170°C



Nominal diameter (DN): 8 to 50 mm



Connection: Rp1/4 to Rp2
G1/4 to G 2



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

Stem: Stainless steel (4832-4810-4812)
Nickel-plated brass (4902)


Handle: stainless steel
(4832-4810-4812)
Nickel-plated brass (4902)

Stem seals:
FKM (4832-4810-4812)
Double seal: EPDM/FKM (4902)

Body: stainless steel (4832-4810-4812)
Nickel-plated brass (4902)

Seat seal: PTFE

Ball: Stainless steel (4832-4810-4812)
Chrome-plated brass (4902)

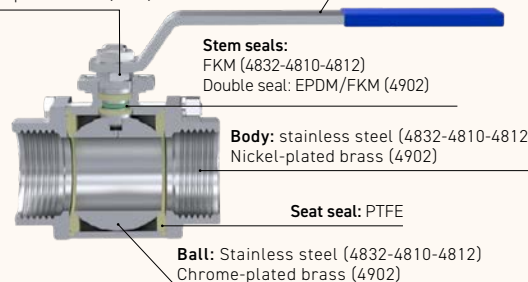

Benefits

- **Durability:** Stainless steel valves, recommended for corrosive applications, are equipped with wear compensation seals that guarantee the longevity of the product's seal.
- **Modularity:** these Legris valves are available in three models to suit all types of installation (with or without fixing screws, removable model with fixing screws).
- **Economical:** 4902 nickel-plated brass models are recommended for aggressive environments subject to high temperatures.

Recommended applications




Specially designed for the most demanding applications


Performance

Pressure and temperature resistance


Model 4832

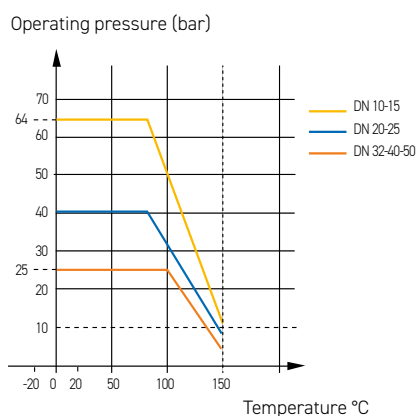

Model 4812

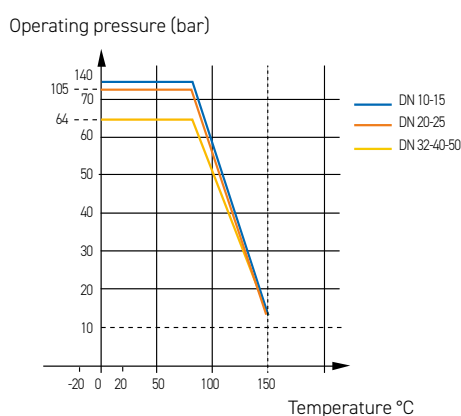


Model 4810

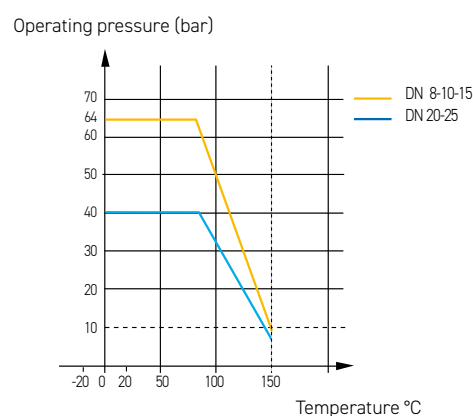

Installation guide for model 4832

Radial dismantling of the valve possible to allow maintenance or replacement of seals:

- 1- Switch off the power supply to the circuit and depressurise it
- 2- Remove the screws from the nuts.
- 3- Remove the body from the top
- 4- Carry out maintenance

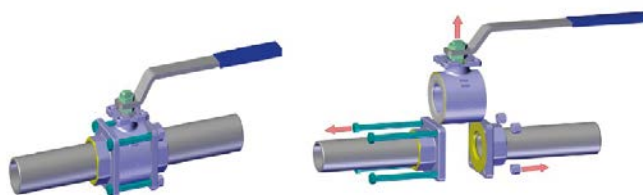

4902

2/2 Standard In-Line Ball Valve,
Female BSPP Thread




DN	C	NP	References
8	G1/4	40	4902 10 13
10	G3/8	40	4902 10 17
15	G1/2	40	4902 15 21
20	G3/4	40	4902 20 27
25	G1	40	4902 25 34
32	G1 1/4	30	4902 32 42*
40	G1 1/2	30	4902 40 49*
50	G2	30	4902 50 48*

* CE-marked models
NP: Nominal pressure

4810

2/2 In-Line Ball Valve, Female BSPP
Thread

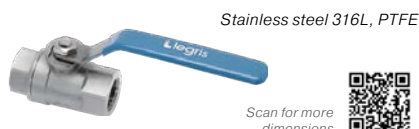

DN	C	NP	References
8	G1/4	64	4810 08 13
10	G3/8	64	4810 10 17
15	G1/2	64	4810 15 21
20	G3/4	40	4810 20 27
25	G1	40	4810 25 34

Threads in accordance with ISO 228-1
Threads in accordance with ISO 228/1-G
NP: Nominal pressure

4812

2/2 In-Line Ball Valve with
Fixing Plate, Female BSPP
Thread



DN	C	NP	References
10	Rp1/4	140	4812 10 13
	Rp3/8	140	4812 10 17
15	Rp1/2	140	4812 15 21
20	Rp3/4	105	4812 20 27
25	Rp1	105	4812 25 34
32	Rp1 1/4	64	4812 32 42*
40	Rp1 1/2	64	4812 40 49*
50	Rp2	64	4812 50 48*

* CE-marked models
Threads in accordance with ISO 7/1.
NP: Nominal pressure

4832

2/2 In-Line 3-Piece Ball Valve with
Fixing Plate, Female BSPP Thread



DN	C	NP	References
10	Rp1/4	64	4832 10 13**
15	Rp1/2	64	4832 15 21
20	Rp3/4	40	4832 20 27
25	Rp1	40	4832 25 34
32	Rp1 1/4	25	4832 32 42*
40	Rp1 1/2	25	4832 40 49*
50	Rp2	25	4832 50 48*

* CE-marked models
** Without mounting plate
Threads in accordance with ISO 7/1
NP: Nominal pressure



Legris short-handle valves can be operated effortlessly in confined spaces. Designed with Legris LF instant connection technology, these technical polymer valves combine lightness and quick installation.

VERSION FOR COMPRESSED AIR



Technical specifications



Fluid: compressed air, neutral gases



Operating pressure: 10⁻² millibar to 10 bar



Operating temperature: -20°C to +80°C



Nominal diameter (DN): 3 to 6 mm



Connection: 4 to 12 mm
G1/8 to G1/2



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.



Component materials

Handle: engineering polymer

Stem seal: NBR

Stem: brass


Body: technical polymer

Seat seal: graphite-impregnated polyamide

Base: nickel-plated brass

Ball: nickel-plated polished brass

Wear compensation seal: NBR

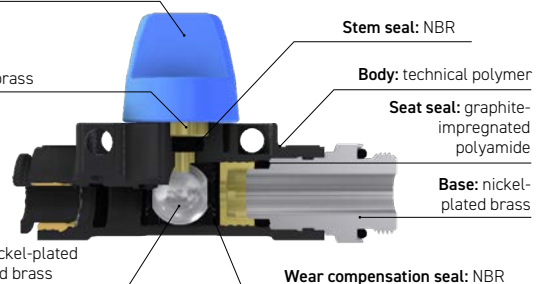

Benefits

- **Ease of installation:** thanks to LF3000 Push-in connections, these products connect quickly and are easy to install.
- **Durability:** fitted with wear compensation seals to ensure the product's long-lasting tightness.
- **Compactness:** ultra-compact handle with a screwdriver slot for easy manoeuvring in confined spaces.
- **Optimised space:** the fixing clips enable space-saving installation, maximising the use of space on machines.
- **Easy identification:** colour-coded control handle to distinguish between the non-vented version (blue) and the vented version (red).


Recommended applications



Operating principle

Vented valve, open position


3/2 model with vent

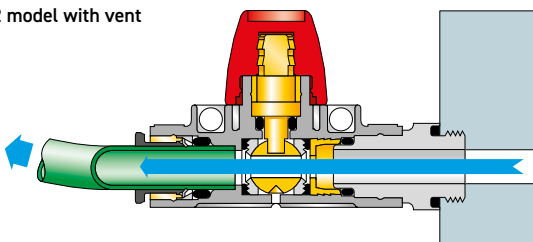

Vented valve, closed position

Handle with screwdriver slot

Downstream tube vent

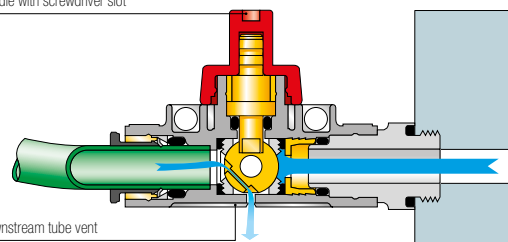

VERSION FOR WATER



Technical specifications



Fluid: industrial water, treated water with or without glycol.



Operating pressure: 0 to 10 bar at 20°C



Operating temperature: -10°C to +95°C



Nominal diameter (DN): 4.83 to 9.40 mm



Connection: Diameter 6 to 12mm
1/4 to 3/8 inch



Regulations: RoHS, REACH, FDA: 21 CFR

Performance depends on the fluid, material and tube used.




Component materials

Handle: technical polymer

Seals: EDPM

Body: polypropylene

Ball: technical polymer

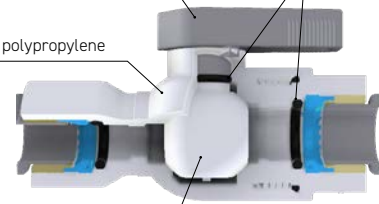

Benefits

- **Robustness:** polypropylene reinforced with fibreglass for improved mechanical and chemical resistance.
- **Ease of installation:** thanks to LIQUIfit® Push-In connections, these products connect quickly and are easy to install.
- **Safety:** ideal for applications subject to repeated cycles, the absence of a pumping effect eliminates any risk of leakage.

Versions for compressed air

7910**2/2 In-Line Mini-Ball Valve**

Technical polymer, NBR

Scan for more
dimensions

DN	ØD	References
3	4	7910 04 00
4	6	7910 06 00
	8	7910 08 00
	10	7910 10 00
6	12	7910 12 00

7911**2/2 In-Line Mini-Ball Valve, Male BSPP Thread**

Technical polymer, Nickel-plated brass, NBR

Scan for more
dimensions

DN	ØD	C	References
4	6	G1/8	7911 06 10
	8	G1/4	7911 08 13
	10	G3/8	7911 10 17
6	12	G1/2	7911 12 21

7913**3/2 In-Line Mini-Ball Valve with Vent**

Technical polymer, NBR

Scan for more
dimensions

DN	ØD	References
3	4	7913 04 00
4	6	7913 06 00
	8	7913 08 00
	10	7913 10 00
6	12	7913 12 00

7914**3/2 In-Line Mini-Ball Valve with Vent, Male BSPP Thread**

Technical polymer, Nickel-plated brass, NBR

Scan for more
dimensions

DN	ØD	C	References
4	6	G1/8	7914 06 10
	8	G1/4	7914 08 13
	10	G3/8	7914 10 17
6	12	G1/2	7914 12 21

7000**Joining Clips**

Technical polymer

Scan for more
dimensions

ØD	References
4	7000 00 04
6-8	7000 00 05
10-12	7000 00 06

Versions for waters

4020

In-Line Ball Valve

Polypropylene with glass fibers, EPDM



Scan for more dimensions



ØD	References
6	4020 06 00WP2
8	4020 08 00WP2
10	4020 10 00WP2
12	4020 12 00WP2

Inch

ØD	References
1/4	4020 56 00WP2
3/8	4020 60 00WP2

4021

2/2 In-Line Ball Valve, Male NPTF Thread

Polypropylene with glass fibers, EPDM



Scan for more dimensions



ØD	C	References
1/4	NPTF1/4	4021 56 14WP2
3/8	NPTF3/8	4021 60 18WP2

4023

2/2 In-Line Ball Valve, Female NPTF Thread

Polypropylene with glass fibers, EPDM



Scan for more dimensions



ØD	C	References
3/8	NPTF3/8	4023 60 18WP2

4022

2/2 Right- Angled Ball Valve, Female NPTF Thread

Polypropylene with glass fibers, EPDM



Scan for more dimensions



ØD	C	References
1/4	NPTF1/4	4022 56 14WP2

4024

2/2 Right-Angled Ball Valve

Polypropylene with glass fibers, EPDM



Scan for more dimensions



ØD	References
6	4024 06 00WP2
10	4024 10 00WP2



► Treated brass



Technical specifications


Models:	0490, 0491 and 0492	BVGT4-C	4991 and 4992
Materials:	Nickel-plated brass/NBR	Nickel-plated brass/PTFE	Chrome-plated brass/PTFE
 Fluids:	Compressed air, neutral gases, industrial water	Compressed air, neutral gases, industrial water	Compressed air, neutral gases, industrial water
 Operating pressure:	10 ⁻² millibar to 12 bar	0 to 30 bar	0 to 30 bar
 Operating temperature:	-20°C to +80°C	-20°C to +170°C	-10°C to +90°C
 Nominal diameter (DN):	4 to 13 mm	8 to 25 mm	6 to 10 mm
 Connection:	G1/4 to G3/4	G1/4 to G1	G1/8 to G1/2
 Regulations:	RoHS, REACH, PED		

Performance depends on the fluids, materials and tube used.

Benefits

- **Robustness:** excellent corrosion resistance thanks to chemical nickel plating.
- **Durability:** fitted with wear compensation O-rings for long-lasting product sealing (models: 0490/0491/0492).
- **Chrome-plated brass finish:** models 4991 and 4992 combine a shiny appearance with corrosion resistance comparable to nickel-plated versions, for applications requiring a high-quality and durable finish.
- **Adaptability:** removable handles to adapt to the piping layout.

Component materials

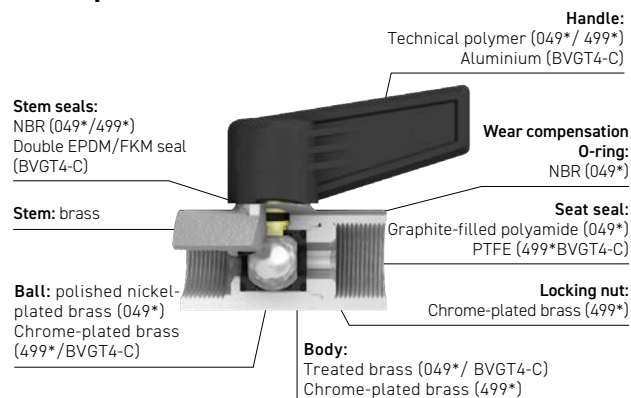

Recommended applications



► Brass



Technical specifications



Fluid: compressed air, neutral gases



Operating pressure: 10^{-2} millibar to 12 bar



Operating temperature: -20°C to +80°C



Nominal diameter (DN): 4 to 13 mm




Connection: G1/4 to G3/4



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

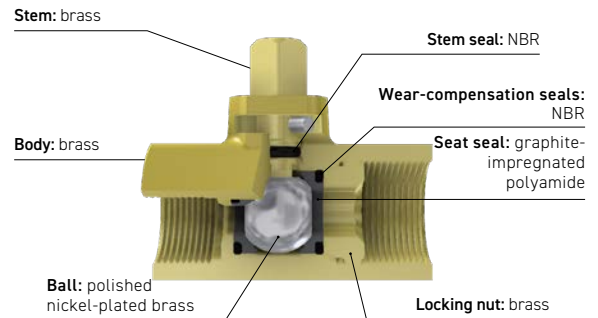

Benefits

- **Durability:** fitted with wear-compensating O-rings for perfect sealing throughout the product's lifetime.
- **Safety:** designed without a handle to prevent accidental or unintentional operation.

► Stainless steel



Technical specifications



Fluid: air and neutral gases, industrial water, oils and lubricants



Operating pressure: 10^{-2} millibars to 20 bar



Operating temperature: -20°C to +120°C



Nominal diameter (DN): 4 to 10 mm




Connection: G1/4 to G1/2



Regulations: RoHS, REACH, PED


Performance depends on the fluid, material and tube used.

Component materials

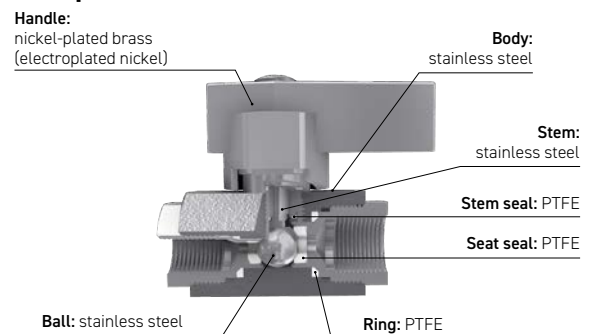

Performance

Operating pressure (bar)

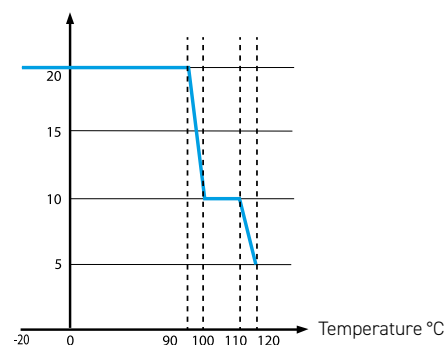

Benefits

- **High durability:** all internal metal parts are made of stainless steel and the handle is protected by an autocatalytic nickel plating treatment to withstand corrosive fluids and harsh environments.

Brass versions

0497

2/2 Ball Valve, Square Stem,
Female BSPP Thread

Brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0497 04 13
7	G3/8	0497 07 17
10	G1/2	0497 10 21
13	G3/4	0497 13 27

0496

2/2 Ball Valve, Square Stem, Male/
Female BSPP Thread

Brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0496 04 13
7	G3/8	0496 07 17
10	G1/2	0496 10 21
13	G3/4	0496 13 27

Nickel-plated brass versions

0492

2/2 In-Line Ball Valve, Female BSPP
Thread

Nickel-plated brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0492 04 13
7	G3/8	0492 07 17
10	G1/2	0492 10 21
13	G3/4	0492 13 27

Technical polymer handle

0491

2/2 In-Line Ball Valve, Male/Female
BSPP Thread

Nickel-plated brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0491 04 13
7	G3/8	0491 07 17
10	G1/2	0491 10 21
13	G3/4	0491 13 27

Technical polymer handle

0490

2/2 In-Line Ball Valve, Male BSPP
Thread

Nickel-plated brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0490 04 13
7	G3/8	0490 07 17
10	G1/2	0490 10 21
13	G3/4	0490 13 27

Technical polymer handle

0492..64

2/2 In-Line Ball Valve, Short
Handle, Female BSPP Thread

Nickel-plated brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0492 04 13 64

Short handle in zamac

0491..64

2/2 In-Line Ball Valve, Short
Handle, Male/Female BSPP Thread

Nickel-plated brass, NBR

Scan for more
dimensions

DN	C	References
4	G1/4	0491 04 13 64

Short handle in zamac

BVG4-C

2/2 Standard In-Line Ball Valve,
Female BSPP Thread, Butterfly
Handle

Nickel-plated brass, PTFE

Scan for more
dimensions

DN	C	References
8	G1/4	BVG4-1/4C
10	G3/8	BVG4-3/8C
15	G1/2	BVG4-1/2C
20	G3/4	BVG4-3/4C
25	G1	BVG4-1C

Compact leverDouble stem seal in FPM

Chromium brass versions

4991

2/2 Standard Compact In-Line Ball Valve, Male/Female BSPP Thread

Chromium brass, PTFE



Scan for more dimensions



DN	C	References
6	G1/8	4991 00 10
8	G1/4	4991 00 13
	G3/8	4991 00 17
10	G1/2	4991 00 21

4992

2/2 Standard Compact In-Line Ball Valve, Female BSPP Thread

Chromium brass, PTFE



Scan for more dimensions



DN	C	References
6	G1/8	4992 00 10
8	G1/4	4992 00 13
	G3/8	4992 00 17
10	G1/2	4992 00 21

Stainless steel versions

0465

2/2 In-Line Light Series Ball Valve, Female BSPP Thread

Stainless steel 316L, PTFE



Scan for more dimensions



DN	C	References
4	G1/4	0465 04 13
7	G3/8	0465 07 17
10	G1/2	0465 10 21

Threads in accordance with ISO 228/1-G



Compliant with DIN EN 331 regulations, these valves are intended for use on gas installations in buildings.

Technical specifications



Fluids: combustible gases



Operating pressure: 0 to 40 bar



Operating temperature: -40°C to +170°C



Nominal diameter (DN): 8 to 50 mm




Connection: G1/4 to G2



Regulations: RoHS, REACH, PED
DIN DVGW (Germany) – MOP 5B 0.1
DIN EN 331

Component materials

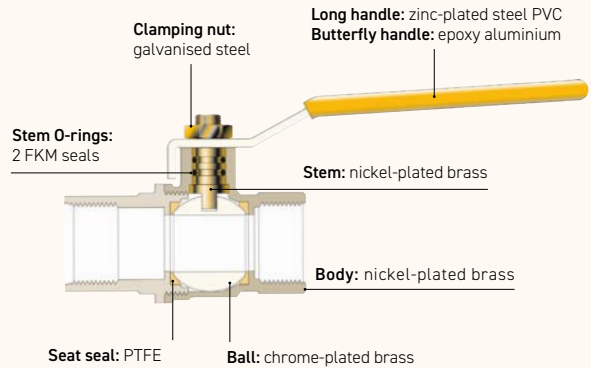

Performance depends on the fluid, material and tube used.

Benefits

- **Safety:** anti-ejection stem to prevent accidents in the event of overpressure.
- **Reliability:** double seals on the stem for improved tightness.
- **Robustness:** chemical nickel plating for increased corrosion resistance.


Recommended applications



Compliant valves for industrial boiler rooms


Performance

Pressure and temperature resistance

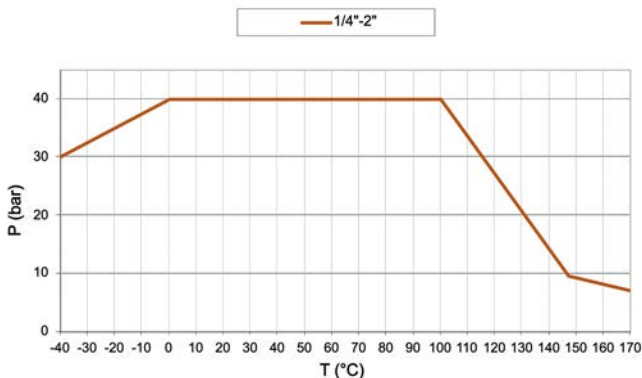


Pressure drop

Pressure drop in bar

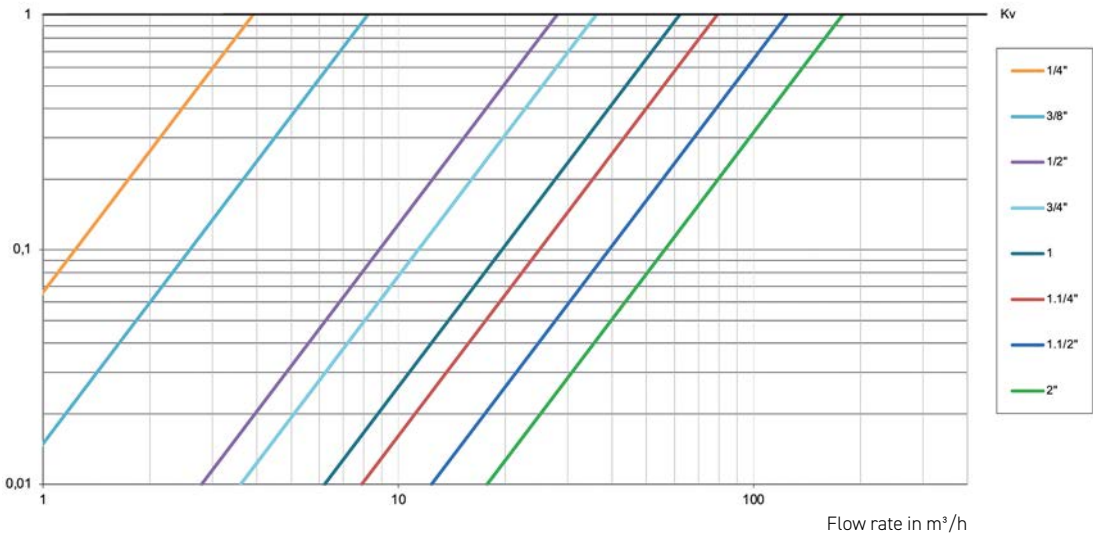


BVG4-L
2/2 In-Line Ball Valve, Female BSPP Thread

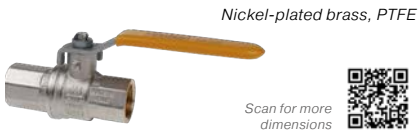

DN	C	References
8	G1/4	BVG4- 1/4L
10	G3/8	BVG4-3/8L
15	G1/2	BVG4- 1/2L
20	G3/4	BVG4-3/4L
25	G1	BVG4- 1L
32	G1 1/4	BVG4- 1.1/4L
40	G1 1/2	BVG4- 1.1/2L
50	G2	BVG4-2L

BVGT4-L
2/2 In-Line Ball Valve, Female BSPP Thread, Butterfly Handle

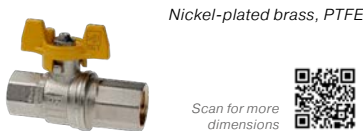

DN	C	References
8	G1/4	BVGT4- 1/4L
10	G3/8	BVGT4-3/8L
15	G1/2	BVGT4- 1/2L
20	G3/4	BVGT4-3/4L
25	G1	BVGT4- 1L



Tested by leading companies in the oxygen market, these valves are degreased and assembled using oxygen-compatible grease. They are also recommended for transporting technical gases.

Technical specifications



Fluids: oxygen (O₂), carbon dioxide (CO₂), nitrogen (N₂), nitrous oxide (N₂O), vacuum



Operating pressure: 10⁻² millibars to 12 bar



Operating temperature: -20°C to +80°C
(-40°C without operation)



Nominal diameter (DN): 7 to 20 mm




Connection: ring 10 to 22 mm



Regulations: RoHS, REACH, PED
Certificate of degreasing and assembly with oxygen-compatible grease.
Certificate of non-use of animal-derived components.

Performance depends on the fluid, material and tube used.

Component materials

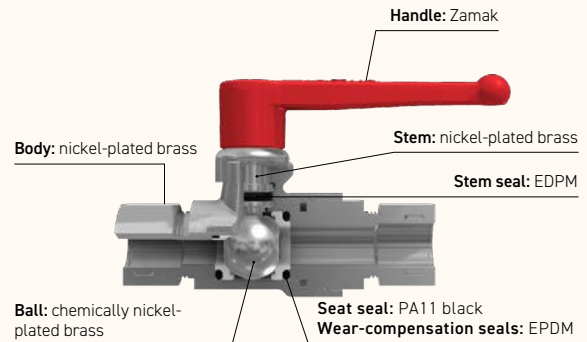

Benefits

- **Guaranteed compatibility:** the special grease, which is compatible with oxygen and other technical gases, ensures the safety of users and installations. Related certificates available.
- **Traceability:** standardised and controlled production processes enable the traceability of all components, validated by individual date coding.
- **Ease of installation:** these valves are equipped with pre-installed fittings to simplify assembly and ensure a perfect seal.

Recommended applications



0414**2/2 In-Line Ball Valve with
Compression Connections***Nickel-plated brass, NBR*

DN	ØD	References
7	10	0414 00 00 07
10	12	0414 00 00 03
	14	0414 00 00 02
	15	0414 00 00 09
13	16	0414 00 00 04
	18	0414 00 00 05
20	22	0414 00 00 06




Legris needle valves, made of nickel-plated brass or stainless steel, offer precise and gradual manual flow control in applications requiring optimal metering or modulation, even under high pressure.

Technical specifications

	Subjects:	Nickel-plated brass	Stainless steel
	Fluids:	Compressed air, industrial water	All fluids
	Operating pressure:	0 to 120 bar	0 to 400 bar
	Operating temperature:	-20°C to +100°C (except model 0510)	- 20°C to +180°C
	Nominal diameter (DN):	4 to 10 mm	3 to 6 mm
	Connection:	G1/8 to G1/2 Compression fittings from 6 to 10 mm	G1/8 to G1/2
	Regulations:	RoHS, REACH, PED	RoHS, REACH, PED

Performance depends on the fluids, materials and tube used.

Component materials

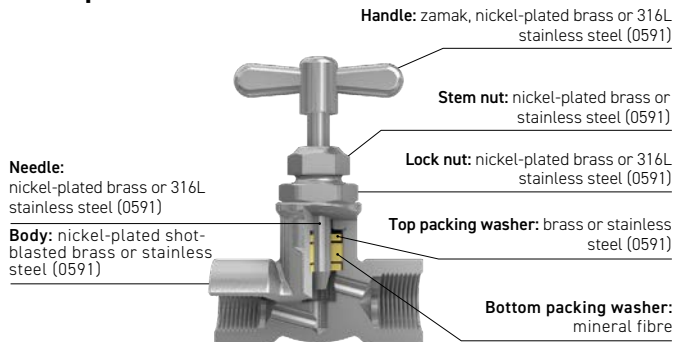

Recommended applications



Benefits

- **Note:** the conical stem, perfectly suited to dosing or purging applications, allows for linear and progressive control of the fluid.
- **Robustness:** suitable for systems requiring precise control under high pressure, thanks to the strength and precision of the needle.
- **Durability:** needle technology generates less mechanical friction, thereby reducing wear and tear during frequent handling.

Tip

To ensure optimal sealing and long-lasting performance of your needle valve, it is recommended that you slightly tighten the packing washer from time to time. This allows you to perfectly adjust the sealing fibre and ensure reliable operation over the long term.

Nickel-plated brass versions

0502

In-Line Needle Valve, Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



DN	C	References
4	G1/8	0502 04 10
	G1/4	0502 04 13
6	G3/8	0502 06 17
9	G3/8	0502 09 17

0510

In-Line Needle Valve with Compression Connections

Nickel-plated brass



Scan for more dimensions



DN	ØD	C	References
4	6	M10x1	0510 04 06
5	8	M12x1	0510 05 08
	10	M16x1.5	0510 05 10

The needle is sealed by an O-ring.
Maximum operating pressure: Ø4: 100 bar, Ø5: 60 bar
Working temperature: -15°C to +70°C
Tightening torques: please refer to the Compression Fittings chapter of this catalogue.

0501

In-Line Needle Valve, Male/Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



DN	C	References
4	G1/8	0501 04 10
	G1/4	0501 04 13
6	G3/8	0501 06 17

0532

Right-Angle Needle Valve, Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



DN	C	References
4	G1/8	0532 04 10
	G1/4	0532 04 13
6	G1/4	0532 06 13

0531

Right-Angle Needle Valve, Male/Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



DN	C	References
4	G1/8	0531 04 10
	G1/4	0531 04 13
6	G1/4	0531 06 13
	G3/8	0531 06 17
10	G1/2	0531 10 21

0562

Needle Drain Valve, Male BSPP thread

Brass



Scan for more dimensions



DN	C	References
5	G1/8	0562 05 10
	G1/4	0562 05 13

0563

Needle Drain Valve, BSPT Thread

Brass, NBR



Scan for more dimensions



DN	C	References
5	R1/4	0563 05 14

Stainless steel versions

0591

Needle Valve, Female BSPP Thread

Stainless steel 316L, PTFE



Scan for more dimensions



DN	C	References
3	G1/8	0591 03 10
4	G1/4	0591 04 13
5	G3/8	0591 05 17
6	G1/2	0591 06 21



Legris axial valves are equipped with a pneumatic actuator. They can be controlled pneumatically or electro-pneumatically by a Namur distributor or a solenoid valve to integrate into automated systems. Also available with detection to continuously monitor the status of the valve.

Technical specifications



Fluids: compressed air, industrial or treated water, oils



Operating pressure: 10 bar



Operating temperature: -20°C to 150°C
(90°C with detection)



Nominal diameter (DN): 10 to 50 mm




Connection: Rp3/8 to Rp2



Regulations: RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Component materials

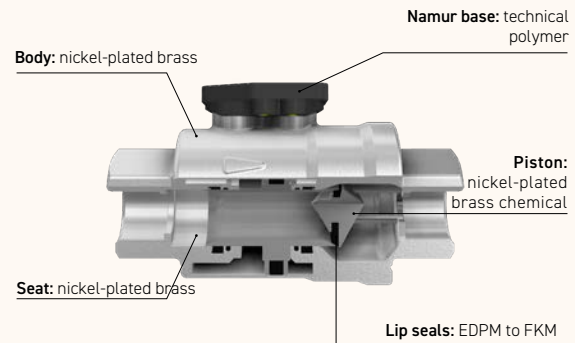

Benefits


- **Performance and compactness:** installed in line with the pipework with a tube diameter equal to that of the connections, the axial valve guarantees optimal flow while limiting space requirements and pressure losses.
- **Durability and responsiveness:** nickel plating on the tube reduces the friction coefficient, improving service life and response time.
- **Operator safety:** no parts accessible from the outside, minimising the risk of accidents and ensuring better protection for users.
- **Operational safety:** process automation prevents any unintended handling or manoeuvring, ensuring reliable and secure operation.

Recommended applications




Installation/user guide

Pressure and temperature resistance

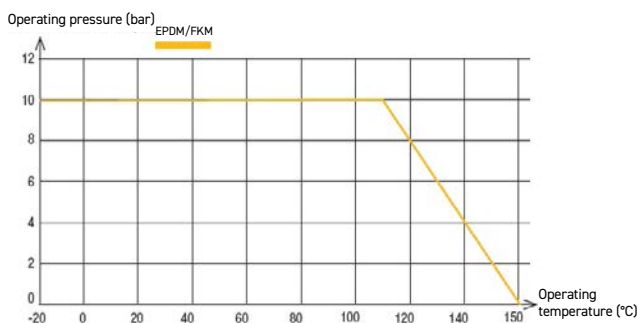

Flow rate and pressure drop characteristics (Kv)

Kv in m³/h (water at ambient temperature, under a differential pressure of 1 bar)

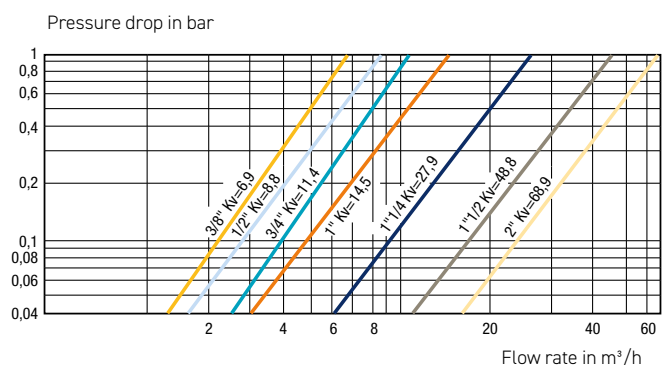

Installation configuration

The Parker Legris axial valve offers users three distinct control options, depending on the application:

PNEUMATIC CONTROL

- available for single or double effect
- a proximity control using compressed air
- for repetitive opening/closing cycles
- remote control when access to the machine is difficult or in ATEX zones



ELECTROPNEUMATIC CONTROL

with NAMUR mounting pattern (3/2 for single-acting – 5/2 for double-acting)

- available for single or double effect
- for automated industrial systems
- mounting on Namur plate (delivered unassembled)
- compact and robust solution
- better response time than other technologies



ELECTROPNEUMATIC CONTROL

with solenoid valve (3/2)

- recommended for single-effect
- for automated industrial systems
- G1/8 normally closed 3/2 pilot solenoid valve
- easy to connect
- 360° adjustable




Operating principle

Depending on the desired position, the control air passes through the actuator chamber to open or close the valve.


Watch the video explaining the operating principle



Normally closed (NC) axial valve

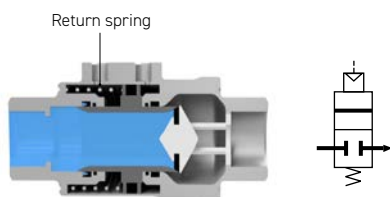


Rest state (valve closed)

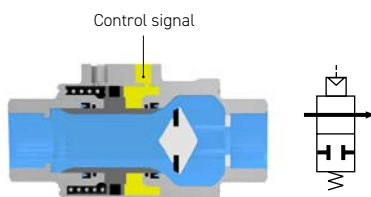


Piloted state (valve open)

Normally open (NO) axial valve

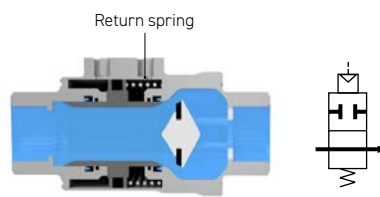


Rest state (valve open)

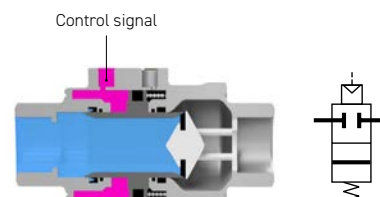


Piloted state (valve closed)

Double-acting axial valve (DA)



Piloted state (valve closed)

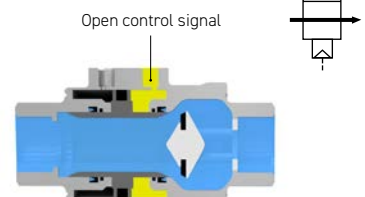

Piloted state (valve open)

Models available without detection or with detection (equipped with a magnet in the piston and supplied with a bracket for mounting the limit switch(es)).

Watch the demonstration video for the model with detection



4202/4204..20

Normally Closed Axial Valve with
FKM Seal, Female BSPP Thread

Nickel-plated brass, FKM



Scan for more
dimensions



C	References	References
	Without detection	With detection
Rp3/8	4202 10 17 20	4204 10 17 20
Rp1/2	4202 15 21 20	4204 15 21 20
Rp3/4	4202 20 27 20	4204 20 27 20
Rp1	4202 25 34 20	4204 25 34 20
Rp1 1/4	4202 32 42 20*	4204 32 42 20*
Rp1 1/2	4202 40 49 20*	4204 40 49 20*
Rp2	4202 50 48 20*	4204 50 48 20*

Pilot port: G1/8

Delivered with a silencer

* CE-marked models

Threads conformed to ISO 7/1 (Rp)

4202/4204..30

Normally Closed Axial Valve with
EPDM seal, Female BSPP Thread

Nickel-plated brass, EPDM



Scan for more
dimensions



C	References	References
	Without detection	With detection
Rp3/8	4202 10 17 30	4204 10 17 30
Rp1/2	4202 15 21 30	4204 15 21 30
Rp3/4	4202 20 27 30	4204 20 27 30
Rp1	4202 25 34 30	4204 25 34 30
Rp1 1/4	4202 32 42 30*	4204 32 42 30*
Rp1 1/2	4202 40 49 30*	4204 40 49 30*
Rp2	4202 50 48 30*	4204 50 48 30*

Pilot port: G1/8

Delivered with a silencer

* CE-marked models

Threads conformed to ISO 7/1 (Rp)

4212/4214..20

Normally Open Axial Valve with
FKM Seal, Female BSPP Thread

Nickel-plated brass, FKM



Scan for more
dimensions



C	References	References
	Without detection	With detection
Rp3/8	4212 10 17 20	4214 10 17 20
Rp1/2	4212 15 21 20	4214 15 21 20
Rp3/4	4212 20 27 20	4214 20 27 20
Rp1	4212 25 34 20	4214 25 34 20
Rp1 1/4	4212 32 42 20*	4214 32 42 20*
Rp1 1/2	4212 40 49 20*	4214 40 49 20*
Rp2	4212 50 48 20*	4214 50 48 20*

Pilot port: G1/8

Delivered with a silencer

* CE-marked models

Threads conformed to ISO 7/1 (Rp)

4222/4224..20

Double-Acting Axial Valve with FKM
Seal, Female BSPP Thread

Nickel-plated brass, FKM



Scan for more
dimensions



C	References	References
	Without detection	With detection
Rp3/8	4222 10 17 20	4224 10 17 20
Rp1/2	4222 15 21 20	4224 15 21 20
Rp3/4	4222 20 27 20	4224 20 27 20
Rp1	4222 25 34 20	4224 25 34 20
Rp1 1/4	4222 32 42 20*	4224 32 42 20*
Rp1 1/2	4222 40 49 20*	4224 40 49 20*
Rp2	4222 50 48 20*	4224 50 48 20*

Pilot port: G1/8

* CE-marked models


Threads conformed to ISO 7/1 (Rp)

Sub-Base for control with spool valve or solenoid valve with Namur pad mounting

Technical polymer



Delivered with the valve, unassembled



4298 00 02

Limit Switch

Nickel-plated brass, FKM



The valve is delivered with a magnet in the piston (assembled during the production) and supplied with a slot for mounting the limit switch(es).

We provide separately inductive limit switch with LED which can be easily mounted in the slot and fixed with their screws.



- REED PNP, LED
- 3 wires (2 meters)
- Operating voltage 5-50 AC/DC
- Permanent current rating of switching output
AC = 350 mA ; DC = 500 mA
- IP67, CE, UKCA, UL, EAC, CCC

Complementary Range Products

Namur pilot Spool Valve

Parker Serie 331 3/2
Parker Serie 341 5/2



Pilot Solenoid Valve G 1/8" 3/2

Parker Serie 131



06

LEGRIS FITTINGS AND TUBING: THE OPTIMUM CONNECTION

Developed jointly with and for our fittings, they guarantee both the best sealing performance and the lowest insertion force.

RELIABILITY AND EXCELLENCE OF LEGRIS TUBING

Co-developed with extrusion specialists and manufactured in Europe with 100% laser control, Legris tubing is high-performance and reliable, guaranteeing the best connection.

A SOLUTION FOR EVERY NEED

Legris tubing and hoses are available in a variety of materials, offering solutions tailored to all industrial needs, from the most standard to the most specific.

Parker.com

5 - POLYURETHANE
E TUBING CALIBRATION

POLYURETHANE TUBING

- P34 - 250000
TUBING CALI

TUBING AND HOSES LEGRIS

LEGRIS - 8 X 5,5 - POLYURETHANE TUBING CALIBRATED

LEGRIS - 8 X 5,5 - POLYURETHANE TUBING CALIBRATED

LEGRIS - 8 X 5,5 - POLYURETHANE TUBING CALIBRATED

LEGRIS - 8 X 5,5 - POLYURETHANE TUBING CALIBRATED

PRODUCTS OFFER


LEGRIS TUBING AND HOSES		Fluids	Materials	Maximum working pressure (bar)	Temperature		 R Ø6 mm	PAGE
					Min.	Max.		
PU	Polyurethane (PU)	 Compressed air	PU ester Twin PU ester tubing	12	-20°C	+70°C	15	260
		   Compressed air Industrial water Medical gases	PU Ester PU crystal Ester PU Ester medical					
	Antistatic polyurethane	 Compressed air	PU ester with additive	10	-20°C	+70°C	15	264
	Anti-spark resistance polyurethane	  Compressed air Industrial water	PU Ester with PVC sheath Single-layer PU Ester	14	-20°C	+70°C	12 15	266
PA	Polyamide (PA)	 Compressed air	Polyamide	50	-40°C	+100°C	20	268
			Multitube made of polyamide	24	-40°C	+85°C	55	269
	Anti-spark resistance polyamide	  Compressed air Industrial water	Polyamide with PVC sheath	36	-20°C	+80°C	25	272
	Fireproof polyamide	 Compressed air	Polyamide with additive	50	-50°C	+100°C	35	274
PE	Polyethylene (PE)	 Industrial water and treated water	Polyethylene	16	-40°C	+95°C	32	276
Fluorinated tubing	Fluorinated ethylene propylene (FEP)	  Compressed air Industrial water and treated water	Fluoropolymer	28	-40°C	+150°C	50	278
	Perfluoroalkoxy (PFA) and Antistatic PFA	  Compressed air Industrial water and treated water	Fluoropolymer	36	-40°C	+150°C	34	280
Recoiled tubing	Recoiled tubing	 Compressed air	Polyurethane	10	-20°C	+70°C	Not applicable	282
			Polyamide	20 15	-20°C -40°C	+80°C +90°C	Not applicable	282
Hoses	Braided hose	  Compressed air Industrial water	Technical PVC with polyester braiding Food version Industrial version	15	-20°C -20°C	+70°C +60°C	10 (Ø8x4) 63 (Ø14.5 x 9)	286
	Self-fastening hose	  Compressed air Industrial water	Nitrile butadiene (NBR) with polyamide braiding	16	-20°C	+100°C	60	288

HOW TO CHOOSE YOUR TUBING OR HOSE

Terminology related to tubing and hoses



Tubing: attachment and sealing are carried out on the external diameter of the calibrated tubing. The pass diameter is therefore optimal.



Hose: The connection and seal are made on the **inner diameter** of the hose. The connection and seal are achieved by deforming the tubing. The internal diameter is therefore calibrated.



What type of fluid do you wish to convey?



Parker offers ranges dedicated to **compressed air and neutral gases**.



Parker presents ranges specifically designed for **water**, including:

- *Industrial water (tap water)*
- *Treated water (deionised, pure and demineralised)*
- *All our solutions are compatible with glycol mixtures*



Parker also has ranges compatible with **technical gases**:

- *Oxygen, breathing air, carbon dioxide, analytical gases, anaesthetic gases and inert gases.*

Do you have any compliance requirements?

- All our products comply with RoHS and REACH standards.
- Our product ranges dedicated to specific markets, such as food, medical or clean rooms, comply with the relevant regulations.
- All our processes comply with ISO 9001 and ISO 14001 standards.

For a complete list of our certificates, [please click here](#).




HOW TO CHOOSE YOUR TUBING OR HOSE

What are the conditions of use of your tubing?

Legris tubing ranges are designed to withstand a variety of conditions.

Below are the recommended products for conveying air and water according to specific usage constraints.

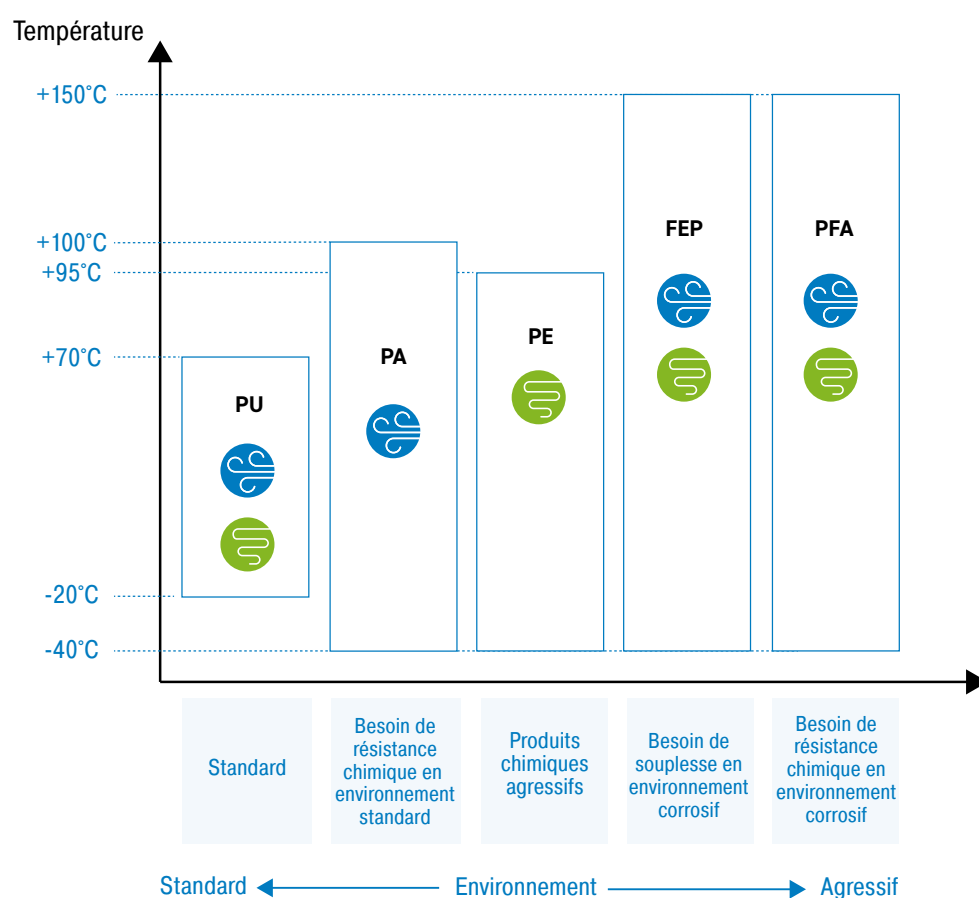

The bending radius shown in this catalogue are based on measurements carried out in accordance with the LPCE method, using qualified materials, and are provided for guidance only to assist in product selection. In the event of any change in material (grade, formulation, batch, treatment, thickness) or in measurement conditions (temperature, bending speed, setup, etc.), these values may vary; therefore, they do not constitute a performance commitment outside this scope.

Which fittings connect best to your tubing or hose?

To guarantee optimal sealing performance, Legris push-in fittings and tubing have been developed together.

The table opposite shows our recommendations for tubing/fitting combinations.

	Tubing	Fitting
PU	Ester	LF3000®
	Ester	LF6000
	Crystal Ester	LF3600 (air) LF6000 (water)
	Antistatic ester PU	LF3600
	Antispark PU	
	PU Ester medical	LF6800
PA	Semi-rigid	LF3000®
	Multi-tubing	LF3000®
	Fireproof	LF3600
	Anti-spark PA	
PE	Advanced PE	LF6000
Fluorinated tubing	FEP	LF3800 (air) LF6000 brass adaptor (industrial applications) LF6000 stainless steel adaptor (Treated water)
	PFA	
Recoiled tubing	PU	Pre-fitted with fittings
	PA	
PVC hoses	PVC	Hose barb connectors, couplers, water couplings and accessories
Self-fastening hoses	NBR	Hose barb connectors, couplers

Tubing & Hoses packaging

Tubepack®

- Lengths of 5 m, 10 m, 25 m and 100 m
- For polyamide, polyurethane, fluoropolymer, polyethylene and anti-spark tubing
- Optimisation of tubing storage
- Immediate identification of the type of tubing
- Integrated winder for easy handling



5 m - 100 m

Reel

- Up to 1000 m
- For polyamide, polyurethane, fluoropolymer, etc. tubing.
- Immediate identification of the tubing for easy handling
- Adapted to workshop reels



40 m - 1000 m

Roller

- Up to 50 m
- Supplied with a protective film
- For braided tubing and special tubing (multi-tubing)



25 m - 50 m

Display bags

- Ideal for self-service sales
- Promotional tools
- Recoiled tubing or tube cut to the required length



Tubing & Hoses marking

Length indicated every meter:

- Time saving when cutting to the exact length;
 - Immediately identifiable remaining quantity (PA and PU);
- Traceability identified by marking the manufacturing batch number.



Tubing & Hoses installation guidelines

To enable you to assemble tubing and hoses, please see our recommended accessories.

- Cut the tubing or hose using the appropriate tool to ensure a straight cut.




Ref. 3000 71 00, page 311



Ref. 3000 71 11, page 311

- The seal is correctly aligned and the straight cut extends to the tubing stop.

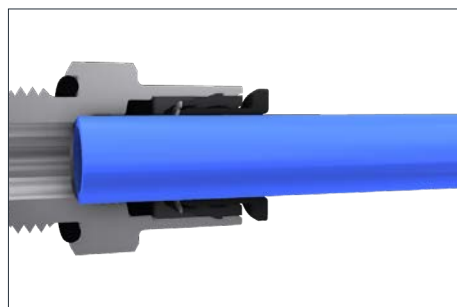

To view the
installation video for
our tubes and hoses,
[scan here.](#)



- **For tubing subjected to high temperatures**, insert a ferrule to prevent creep.
Ref. 0127 in brass or Ref. 1827 in stainless steel depending on the fluid being conveyed.



Page 312

- **For PVC hoses**, we recommend installing retaining clip at both ends (Ref. 0697).



Page 312

- **Self-fastening hose assembly machine**



Ref. 611050HV, page 311

Part number identification

Part numbers are chosen according to a mnemonic code.

Each tubing or hose is identified by:

- 1025: information on packaging and length
- U: the material
- 14: outer diameter
- R: additional information about the material
- 08: the colour code
- 95: a suffix to characterise the tubing

Material

H = Self-fastening NBR
L = Rigid polyamide
P = Semi-rigid polyamide
T = Fluoropolymer
U = Polyurethane
V = PVC
Y = Polyethylene

Tubing type

P..**A** = Anti-static PA
P..**R** = Fireproof PA
P..**V** = Anti-spark PA, with PVC sheath
T.. = FEP
T..**A** = Antistatic PFA
T..**P** = PFA
U..**A** = Antistatic PU
U..**K** = Single-layer spark-resistant PU
U..**R** = PU Ester
U..**V** = Spark-proof PU with PVC sheath
Y..**F** = PE Advanced

Packaging code	Length	External code Ø	Colour	Special inner Ø
1 = Tubepack® or LIQUIfit® reel	015 = 150 m 020 = 20 m 025 = 25 m 030 = 300 m 040 = 40 m 075 = 75 m 080 = 80 m 100 = 100 m	03 = 3 mm 04 = 4 mm 06 = 6 mm 08 = 8 mm .../... 56 mm = 1/4" .../...	00 = ○ Clear 01 = ● black 02 = ● green 03 = ● red 04 = ● blue 05 = ● yellow 06 = ● grey 07 = ● orange 08 = ○ crystal clear 09 = ● purple 10 = ○ white 12 = ● crystal green 13 = ● crystal red 14 = ● crystal blue 17 = ● crystal orange	18 = 1.8 mm 27 = 2.7 mm 33 = 3.3 mm 75 = 7.5 mm 95 = 9.5 mm
2 = Long length on reel	003 = 300 m 005 = 500 m 010 = 1000 m	10 = 10 mm 04 = 4 mm 06 = 6 mm 08 = 8 mm 10 = 10 mm 04 = 4 mm 06 = 6 mm		M02 = 2 tubes M04 = 4 tubes M07 = 7 tubes M12 = 12 tubes



Recognized for its flexibility, Legris PU tubing provides up to a 50% space saving compared with PA tubing. This is the ideal tubing choice for pneumatic applications in standard environments.

Technical specifications


	Material:	Polyurethane ester
	Fluids:	Compressed air
	Working pressure:	10 ⁻² millibar to 12 bar
	Working temperature:	-20°C to +70°C
	Diameter:	3 to 16 mm
	Regulations:	RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.

Benefits


- Small bending radius to fit into confined spaces in standard environments.
- Available in a twin-tubing version to simplify installation and further reduce the overall dimensions.
- Available in packaged form for applications requiring ISO 15001 cleanliness class.

Recommended applications

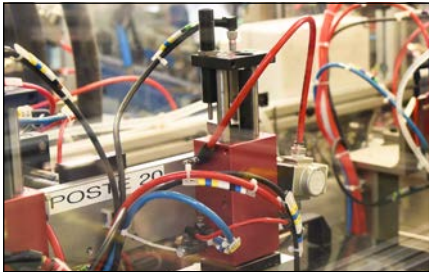

Pneumatic assembly in a confined industrial environment

Tubing performance

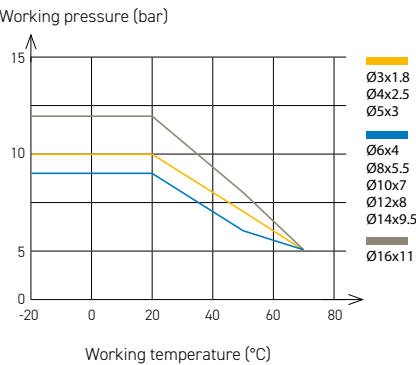

Tube O.D	O.D Tolerance
3 to 8 mm	+0.10/-0.10
10 to 16 mm	+0.15/-0.15

PU ESTER VERSION



Technical specifications

	Material:	PU Ester	PU crystal Ester	PU Ester medical
	Fluids:	Industrial water (without glycol)	Compressed air and industrial water	Medical gases
	Working pressure:	10 ⁻² millibar to 12 bar	10 ⁻² millibar to 12 bar	10 ⁻² millibar to 10 bar
	Working temperature:	-20°C to +40°C	-20°C to +40°C	-20°C to +90°C
	Diameter:	4 to 16 mm	4 to 16 mm	4 to 12 mm
	Regulations:	RoHS, REACH, PED	RoHS, REACH, PED, FDA, EC N° 1935/2004	RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.

Benefits

- **PU Ester:** a material that is more chemically resistant than standard PU (ester), it is compatible with industrial water (without glycol up to 40°C).
- **PU crystal Ester:** certified by the Food and Drug Administration (FDA) to meet the requirements of the food industry.
- **Medical-grade PU Ester:** meets ISO 15001 cleanliness requirements, oxygen-compatible, ideal for medical equipment.

1025U

Polyurethane (PU) Ester Tubing - Tubepack® 25 m

ØD ext.	ØD int.							
3	1.8	8	1025U03 01 18					
4	2.5	10	1025U04 01	1025U04 02	1025U04 03	1025U04 04	1025U04 05	1025U04 06
5	3	13	1025U05 01			1025U05 04		
6	4	15	1025U06 01	1025U06 02	1025U06 03	1025U06 04	1025U06 05	1025U06 06
8	5.5	20	1025U08 01	1025U08 02	1025U08 03	1025U08 04	1025U08 05	1025U08 06
10	7	35	1025U10 01	1025U10 02	1025U10 03	1025U10 04	1025U10 05	1025U10 06
12	8	35	1025U12 01	1025U12 02	1025U12 03	1025U12 04	1025U12 05	1025U12 06
14	9.5	45	1025U14 01 95			1025U14 04 95		
16	11	45	1025U16 01 11	1025U16 02 11	1025U16 03 11	1025U16 04 11		

1100U

Polyurethane (PU) Ester Tubing - Tubepack® 100 m

ØD ext.	ØD int.							
4	2.5	10	1100U04 01	1100U04 02	1100U04 03	1100U04 04	1100U04 05	1100U04 06
5	3	13	1100U05 01			1100U05 04		
6	4	15	1100U06 01	1100U06 02	1100U06 03	1100U06 04	1100U06 05	1100U06 06
8	5.5	20	1100U08 01	1100U08 02	1100U08 03	1100U08 04	1100U08 05	1100U08 06
10	7	35	1100U10 01			1100U10 04		
12	8	35	1100U12 01			1100U12 04		
14	9.5	45	1100U14 01 95			1100U14 04 95		
16	11	45	1100U16 01 11			1100U16 04 11		

2003U

Polyurethane (PU) Ester Tubing - Drum 300 m

ØD ext.	ØD int.					
10	7	35	2003U10 01	2003U10 03	2003U10 04	2003U10 06

2005U

Polyurethane (PU) Ester Tubing - Drum 500 m

ØD ext.	ØD int.					
8	5.5	20	2005U08 01	2005U08 03	2005U08 04	2005U08 05

2010U

Polyurethane (PU) Ester Tubing - Drum 1000 m

ØD ext.	ØD int.							
4	2.5	12	2010U04 01	2010U04 02	2010U04 03	2010U04 04	2010U04 05	2010U04 06
6	4	15	2010U06 01	2010U06 02	2010U06 03	2010U06 04	2010U06 05	2010U06 06

1420U

Twin Polyurethane (PU) Tubing - Tubepack® 25 m

ØD ext.	ØD int.				
4	2.5	12	1420U04 11	1420U04 41	1420U04 44
6	4	15	1420U06 11	1420U06 41	1420U06 44
8	5.5	20	1420U08 11	1420U08 41	1420U08 44

1025U..R

Polyurethane (PU) Ether Tubing - Tubepack® 25 m

ØD ext.	ØD int.								
4	2.5	12	1025U04R01	1025U04R04	1025U04R08	1025U04R12	1025U04R13	1025U04R14	1025U04R17
5	3	13			1025U05R08				
6	4	15	1025U06R01	1025U06R04	1025U06R08	1025U06R12	1025U06R13	1025U06R14	1025U06R17
8	5.5	20	1025U08R01	1025U08R04	1025U08R08	1025U08R12	1025U08R13	1025U08R14	1025U08R17
10	7	25	1025U10R01	1025U10R04	1025U10R08			1025U10R14	
12	8	35	1025U12R01	1025U12R04	1025U12R08			1025U12R14	
14	9.5	45		1025U14R04 95	1025U14R08 95				
16	11	45			1025U16R08 11				


1100U..R

Polyurethane (PU) Ether Tubing - Tubepack® 100 m

ØD ext.	ØD int.								
4	2.5	12	1100U04R01	1100U04R04	1100U04R08			1100U04R14	
6	4	15	1100U06R01	1100U06R04	1100U06R08	1100U06R12	1100U06R13	1100U06R14	1100U06R17
8	5.5	20	1100U08R01	1100U08R04	1100U08R08	1100U08R12	1100U08R13	1100U08R14	1100U08R17
10	7	25			1100U10R08			1100U10R14	
12	8	35		1100U12R04	1100U12R08				
14	9.5	45			1100U14R08 95				
16	11	45			1100U16R08 11				


2003U..R

Polyurethane (PU) Ether Tubing - Drum 300 m

ØD ext.	ØD int.			
10	7	25	2003U10R01	2003U10R08


2005U..R

Polyurethane (PU) Ether Tubing - Drum 500 m

ØD ext.	ØD int.				
8	5.5	20	2005U08R01	2005U08R04	2005U08R08


2010U..R

Polyurethane (PU) Ether Tubing - Drum 1000 m

ØD ext.	ØD int.				
4	2.5	12			2010U04R08
6	4	15	2010U06R01	2010U06R04	2010U06R08

1025U..G

Clean medical-grade polyurethane (PU) Ether tubing - Tubepack® 25 m

ØD ext.	ØD int.		
4	2.5	8	1025U04G08
6	4	12	1025U06G08
8	5.5	18	1025U08G08
10	7	23	1025U10G08
12	8	25	1025U12G08



By dissipating accumulated static electricity, Legris antistatic PU tubing reduces the risk of sparks in sensitive, dusty or explosive environments.

Technical specifications

	Material:	Polyurethane ester with additive
	Fluids:	Compressed air
	Working pressure:	10 ⁻² millibar to 10 bar
	Working temperature:	-20°C to +70°C
	Diameter:	3 to 12 mm
	Regulations:	RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.


Benefits

- **Constant resistivity of 10²Ω.m** across the wall thickness, preventing the build-up of static electricity. This tubing is therefore recommended for ATEX zones.
- **Small bending radius** to simplify installation in confined spaces.
- **Improved chemical resistance** and UV resistance for enhanced durability.

Recommended applications



Tubing performance

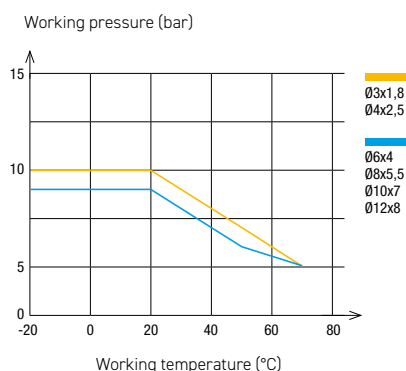

Tube O.D	O.D Tolerance
3 to 8 mm	+0.10/-0.10
10 to 12 mm	+0.15/-0.15

Note: In order to fully preserve the properties of the antistatic tubing, no markings are made on this tubing.

1100U..A

Antistatic polyurethane (PU) Ester tubing - Tubepack® 100 m

ØD ext.	ØD int.		
3	1.8	10	1100U03A01
4	2.5	12	1100U04A01
6	4	15	1100U06A01
8	5.5	25	1100U08A01
10	7	35	1100U10A01
12	8	45	1100U12A01



Flexible and resistant to welding spatter, Legris spark-resistant PU tubing is recommended for industrial applications in harsh environments such as welding machines and robots.

Technical specifications

	Material:	Fire-retardant polyurethane Ether or polyurethane Ether with self-extinguishing PVC sheath
	Fluids:	Compressed air and industrial water (with or without glycol)
	Working pressure:	10 ⁻² millibar to 14 bar
	Working temperature:	-20°C to +70°C
	Diameter:	6 to 12 mm
	Regulations:	RoHS, REACH, PED, UL94

Performance depends on the fluids, materials and connection used.

Benefits

Single-layer PU:

- **Fire-retardant material** reducing the risk of fire in installations.
- **Flexibility of polyurethane** enabling it to withstand mechanical stresses at high speeds.

PVC-coated PU:

- **Self-extinguishing PVC sheath** ensuring the integrity of the inner PU tubing.
- **Double-layer structure** for improved resistance to twisting and crushing.


Recommended applications




Resistance to welding spatter in automotive metalwork

Tubing performance

Spark-resistant polyurethane tubing (single layer)

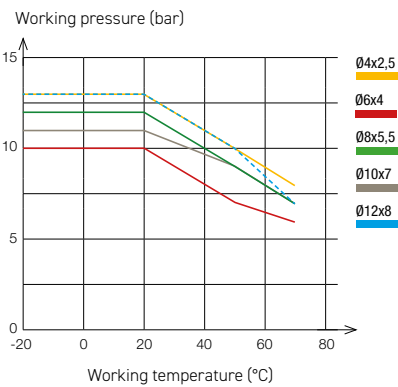

Spark-resistant polyurethane tubing with PVC sheath

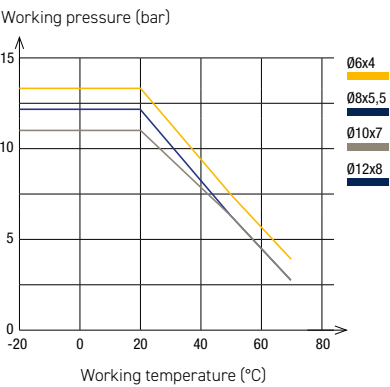

Tube O.D	O.D Tolerance	PVC sheath thickness and tolerances
4 to 8 mm	+0.10/-0.10	1mm +0.10/-0.10
10 to 14 mm	+0.15/-0.15	

1025U..V

Polyurethane (PU) Ether tubing with anti-spark jacket - Tubepack® 25 m

ØD ext.	ØD int.				
6	4	12	1025U06V01	1025U06V03	1025U06V04
8	5.5	20	1025U08V01	1025U08V03	1025U08V04
10	7	25	1025U10V01	1025U10V03	1025U10V04
12	8	35	1025U12V01	1025U12V03	

1100U..V

Polyurethane (PU) Ether tubing with anti-spark jacket - Tubepack® 100 m

ØD ext.	ØD int.		
6	4	12	1100U06V01
8	5.5	20	1100U08V01
10	7	25	1100U10V01

1025U..K

Single-layer polyurethane (PU) Ether anti-spark tubing - Tubepack® 25 m

ØD ext.	ØD int.					
6	4	15	1025U06K01	1025U06K02	1025U06K03	1025U06K04
8	5.5	20	1025U08K01	1025U08K02	1025U08K03	1025U08K04
10	7	25	1025U10K01	1025U10K02	1025U10K03	1025U10K04
12	8	35	1025U12K01	1025U12K02	1025U12K03	1025U12K04

1100U..K

Single-layer polyurethane (PU) Ether anti-spark tubing - Tubepack® 100 m

ØD ext.	ØD int.					
6	4	15	1100U06K01	1100U06K02	1100U06K03	1100U06K04
8	5.5	20	1100U08K01	1100U08K02	1100U08K03	
10	7	25		1100U10K02	1100U10K03	1100U10K04
14	9.5	45			1100U14K03 95	1100U14K04 95

6000 71 00

Stripping Tool for Anti-Spark Tubing

Technical polymer, stainless steel



Reference

6000 71 00



Legris PA tubing combines robustness with chemical and thermal resistance to meet the demands of pneumatic applications in demanding industrial environments.

Technical specifications

- **Material:** Polyamide
- **Fluids:** Compressed air
- **Working pressure:** 10⁻² millibar to 50 bar
- **Working temperature:** -40°C to +100°C
- **Diameter:** 3 to 18 mm
- **Regulations:** RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.

Benefits


- Proven technical polyamide** for high chemical resistance and high temperature resistance.
- Mechanical strength:** recognized for its durability and flexibility, this PA tubing offers excellent resistance to dynamic fatigue and wear.

Recommended applications



Mechanical robustness and temperature resistance in demanding industrial environments

Tubing performance

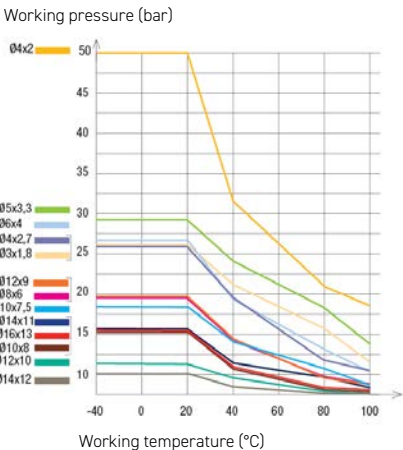

Tube O.D	O.D Tolerance
3 to 5 mm	+0.05/-0.08
6 to 16 mm	+0.05/-0.10


Legris multi-tube PA version

The combination of PA tubing and PVC sheathing combines the mechanical and chemical advantages of polyamide with the protection, flexibility and safety provided by PVC sheathing.




- Available with 2 to 12 numbered tubes for circuit identification
- PVC coating resistant to abrasion, sparks and chemical attack
- Spiral tube assembly to minimize the bending radius
- Working pressure limited to 24 bar
- Working temperature: -40°C to +85°C


Colour distribution

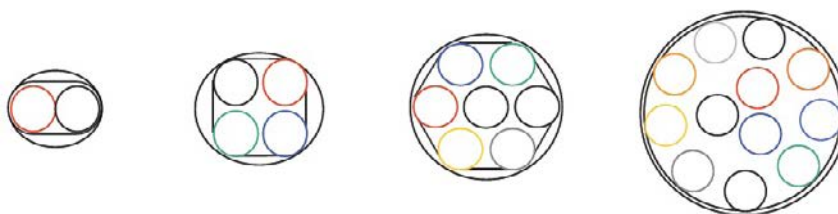


1025P**Semi-Rigid Polyamide (PA) Tubing - Tubepack® 25 m**

ØD ext.	ØD int.								
3	1.8	15	1025P03 00 18				1025P03 04 18		
4	2	25	1025P04 00	1025P04 01	1025P04 02	1025P04 03	1025P04 04	1025P04 05	
	2.7	30	1025P04 00 27	1025P04 01 27	1025P04 02 27	1025P04 03 27	1025P04 04 27	1025P04 05 27	1025P04 06 27
5	3.3	30	1025P05 00 33	1025P05 01 33			1025P05 04 33		
6	4	35	1025P06 00	1025P06 01	1025P06 02	1025P06 03	1025P06 04	1025P06 05	1025P06 06
8	6	55	1025P08 00	1025P08 01	1025P08 02	1025P08 03	1025P08 04	1025P08 05	1025P08 06
10	7.5	75	1025P10 00 75	1025P10 01 75			1025P10 04 75		
	8	90	1025P10 00	1025P10 01	1025P10 02	1025P10 03	1025P10 04	1025P10 05	1025P10 06
12	9	75	1025P12 00 09	1025P12 01 09			1025P12 04 09		
	10	90	1025P12 00	1025P12 01			1025P12 04	1025P12 05	
14	11	100	1025P14 00 11	1025P14 01 11			1025P14 04 11		
	12	100	1025P14 00	1025P14 01			1025P14 04		
16	13	120	1025P16 00 13	1025P16 01 13	1025P16 02 13	1025P16 03 13	1025P16 04 13		
18	14	130	1025P18 00 14						


1100P**Semi-Rigid Polyamide (PA) Tubing - Tubepack® 100 m**

ØD ext.	ØD int.								
3	1.8	15	1100P03 00 18						
4	2	25	1100P04 00	1100P04 01	1100P04 02	1100P04 03	1100P04 04	1100P04 05	1100P04 06
	2.7	30	1100P04 00 27	1100P04 01 27	1100P04 02 27	1100P04 03 27	1100P04 04 27	1100P04 05 27	1100P04 06 27
5	3.3	30	1100P05 00 33						
6	4	35	1100P06 00	1100P06 01	1100P06 02	1100P06 03	1100P06 04	1100P06 05	1100P06 06
8	6	55	1100P08 00	1100P08 01	1100P08 02	1100P08 03	1100P08 04	1100P08 05	1100P08 06
10	7.5	75	1100P10 00 75	1100P10 01 75			1100P10 04 75		
	8	90	1100P10 00	1100P10 01	1100P10 02	1100P10 03	1100P10 04	1100P10 05	
12	9	75	1100P12 00 09	1100P12 01 09			1100P12 04 09		
	10	90	1100P12 00	1100P12 01			1100P12 04		1100P12 06
14	11	100	1100P14 00 11	1100P14 01 11			1100P14 04 11		
	12	100	1100P14 00	1100P14 01			1100P14 04		
16	13	120	1100P16 00 13	1100P16 01 13			1100P16 04 13		

2005P**Semi-Rigid Polyamide (PA) Tubing - Drum 500 m**

ØD ext.	ØD int.						
8	6	55	2005P08 00	2005P08 01	2005P08 02	2005P08 03	2005P08 04
10	8	90	2005P10 00	2005P10 01	2005P10 02	2005P10 03	2005P10 04

2010P**Semi-Rigid Polyamide (PA) Tubing - Drum 1000 m**

ØD ext.	ØD int.							
4	2.7	30	2010P04 00 27	2010P04 01 27	2010P04 02 27	2010P04 03 27	2010P04 04 27	
6	4	35	2010P06 00	2010P06 01	2010P06 02	2010P06 03	2010P06 04	2010P06 05

1010P..M

Semi-Rigid Polyamide (PA) Multi-Tubing - Reel 10 m

ØD ext.	ØD int.	 R	Number of outlets	
4	2.7	35	4	1010P04 00M04
	2.7	45	7	1010P04 00M07
6	4	55	4	1010P06 00M04
	4	60	7	1010P06 00M07
8	6	45	2	1010P08 00M02

1050P..M

Semi-Rigid Polyamide (PA) Multi-Tubing - Reel 50 m

ØD ext.	ØD int.	 R	Number of outlets	
4	2.7	20	2	1050P04 00M02
	2.7	35	4	1050P04 00M04
	2.7	45	7	1050P04 00M07
	2.7	55	12	1050P04 00M12
6	4	45	2	1050P06 00M02
	4	55	4	1050P06 00M04
	4	60	7	1050P06 00M07
8	6	45	2	1050P08 00M02



Perfectly suited for applications in harsh environments, Legris antispark PA tubing is designed with a fire-retardant PVC sheath to withstand impact, abrasion and sparks.

Technical specifications

	Material:	Polyamide with PVC sheath
	Fluids:	Compressed air and industrial water
	Working pressure:	10 ⁻² millibar to 36 bar
	Working temperature:	-20°C to +80°C
	Diameter:	4 to 8 mm
	Regulations:	RoHS, REACH, PED, UL 94

Performance depends on the fluids, materials and connection used.

Benefits

The anti-spark PA tubing offers all the advantages of the PA tubing, plus the following features:


- **Fire-retardant PVC sheath** which protects the inner PA tubing, ideal for applications exposed to sparks and flames.
- **Resistant to twisting and crushing**, perfectly suited to applications under mechanical stress.

Recommended applications



Robustness and resistance to welding spatter in harsh industrial environments

Tubing performance

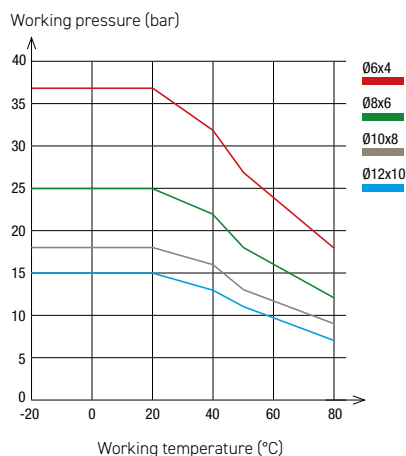

External diameter	O.D Tolerance	Thickness of the PVC sheath
PVC sheath 8 to 12 mm	+0.10/-0.10	1mm
Inner tubing 6 to 10 mm	+0.05/-0.10	

External diameter from the tubing	Stripping length for LF 3600 fittings (mm)
6 mm	18± 1
8 mm	19± 1
10 mm	24± 1

1025P..V

Anti-Spark Polyamide (PA) Tubing - Tubepack® 25 m

ØD ext.	ØD int.			
6	4	25	1025P06V01	1025P06V04
8	6	30	1025P08V01	1025P08V04
10	8	55	1025P10V01	1025P10V04

1100P..V

Anti-Spark Polyamide (PA) Tubing - Tubepack® 100 m

ØD ext.	ØD int.			
6	4	25		1100P06V04
8	6	30	1100P08V01	1100P08V04
10	8	55	1100P10V01	1100P10V04
12	10	60	1100P12V01	

6000 71 00

Stripping Tool for Anti-Spark Tubing

Technical polymer, stainless steel

Reference

6000 71 00



Designed for Flame-exposed applications, Legris flame-retardant, self-extinguishing PA tubing does not emit toxic fumes, protecting operators and the environment.

Technical specifications

	Material:	Polyamide with additive
	Fluids:	Compressed air
	Working pressure:	10 ⁻² millibar to 50 bar
	Working temperature:	-40°C to +100°C
	Diameter:	4 to 12 mm
	Regulations:	RoHS, REACH, PED, UL 94-V0

Performance depends on the fluids, materials and connection used.

Benefits


Fire-retardant PA tubing offers all the advantages of PA tubing, plus the following features:

- **Excellent resistance to sparks and flames** thanks to UL94-V0 certified self-extinguishing material.
- **No toxic fumes** protecting users and the environment.

Recommended applications



Tubing performance

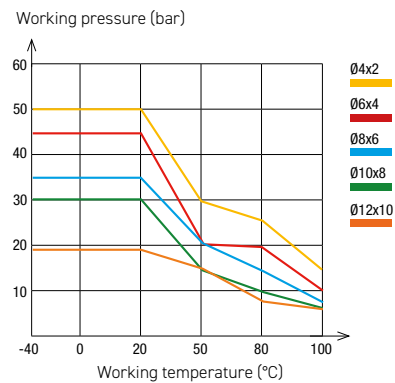

Tube O.D	O.D Tolerance
4 mm	+0.05/-0.08
6 to 12 mm	+0.05/-0.10

1100P..R

Fireproof High Resistant Polyamide (PA) Tubing - Tubepack® 100 m

ØD ext.	ØD int.	 R	 White		
4	2	25	1100P04R00	1100P04R01	1100P04R04
6	4	35	1100P06R00	1100P06R01	1100P06R04
8	6	55	1100P08R00	1100P08R01	1100P08R04
10	8	90	1100P10R00	1100P10R01	1100P10R04
12	10	92	1100P12R00	1100P12R01	

The extrusion constraints give the tube an anthracite appearance, but do not affect its performance in any way.



Designed to convey water in aggressive environments, Legris PE tubing offers high chemical resistance, making it ideal for industrial water treatment and cooling applications.

Technical specifications

	Material:	Polyethylene
	Fluids:	Industrial and treated water (with or without glycol)
	Working pressure:	10 ⁻² millibar to 16 bar
	Working temperature:	-40°C to +100°C
	Diameter:	3 to 18 mm
	Regulations:	RoHS, REACH, PED, FDA, EC N° 1935/2004


Performance depends on the fluids, materials and connection used.

Benefits

- **High chemical resistance**, ideal for transferring glycol-based water coolants and water treatment.
- **FDA-certified**, it meets the requirements of the food industry.

Tubing performance

Working pressure (bar)

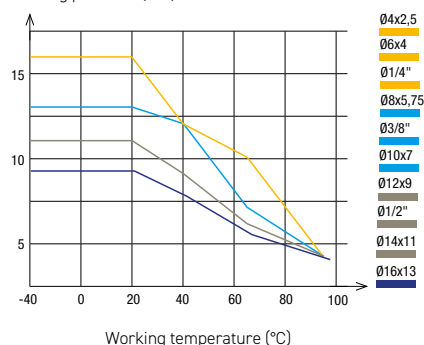


External diameter from the tubing	O.D Tolerance
1/4" to 1/2"	+0.10/-0.10
4 to 16 mm	+0.10/-0.10

Recommended applications




1015Y..F

Advanced Polyethylene (APE) Tubing - Drum 150 m

ØD ext.	ØD int.		 Clear					 White
6	4	32	1015Y06F00	1015Y06F01			1015Y06F04	1015Y06F10
8	5.75	40	1015Y08F00	1015Y08F01	1015Y08F02	1015Y08F03	1015Y08F04	1015Y08F10
10	7	40	1015Y10F00	1015Y10F01		1015Y10F03	1015Y10F04	1015Y10F10


1030Y..F

Advanced Polyethylene (APE) Tubing - Drum 300 m

ØD ext.	ØD int.		 Clear				 White
4	2.5	16	1030Y04F00	1030Y04F01			
6	4	32	1030Y06F00	1030Y06F01	1030Y06F03	1030Y06F04	1030Y06F10


1075Y..F

Advanced Polyethylene (APE) Tubing - Drum (Ø12) Tubepack (Ø 16) 75 m

ØD ext.	ØD int.		 Clear					 White
12	9	55	1075Y12F00	1075Y12F01	1075Y12F02	1075Y12F03	1075Y12F04	1075Y12F10
16	13	90	1075Y16F00					


1096Y..F

Advanced Polyethylene (APE) Tubing - Drum 250 ft

ØD ext.	ØD int.		 Clear		
1/2	0.375	1.96	1096Y62F00	1096Y62F01	1096Y62F04


1098Y..F

Advanced Polyethylene (APE) Tubing - Drum 500 ft

ØD ext.	ØD int.		 Clear		
1/4	0.170	0.78	1098Y56F00	1098Y56F01	1098Y56F04
3/8	0.250	1.18	1098Y60F00	1098Y60F01	1098Y60F04

1100Y

Low-density Polyethylene tubing - Tubepack® 100 m

ØD ext.	ØD int.		 clear
4	2	25	1100Y04 00
6	4	35	1100Y06 00
8	6	55	1100Y08 00
10	8	80	1100Y10 00
12	9	65	1100Y12 00
14	11	80	1100Y14 00



Legris FEP tubing combines high chemical and thermal resistance, enabling its use in demanding industrial applications and corrosive environments.

Technical specifications

	Material:	Fluorinated ethylene propylene
	Fluids:	Air, industrial water and treated water (with or without glycol)
	Working pressure:	0 to 28 bar
	Working temperature:	-40°C to +150°C
	Diameter:	4 to 12 mm
	Regulations:	RoHS, REACH, PED, EC N° 1935/2004, FDA, UL94 V0

Performance depends on the fluids, materials and connection used.

Benefits

Chemical properties of Legris fluorinated ethylene propylene:


- **Tubing perfectly suited** for transferring industrial cooling water based on treated water and particularly aggressive glycol.
- **Tubing resistant** to corrosive environments in the presence of chemical agents and solvents.
- **Excellent mechanical performance** in very high temperature applications.
- **UL94-V0-certified**, the FEP tubing is fire-resistant and thus protects installations from fire hazards.

Recommended applications



Tubing performance

Working pressure (bar)

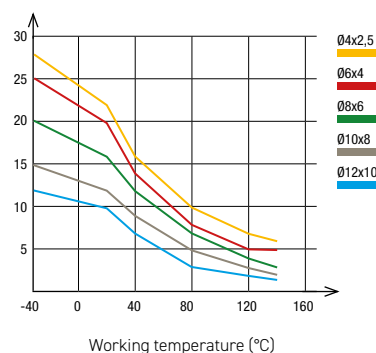

Tube O.D	O.D Tolerance
4 mm	+0.05/-0.05
6 to 10 mm	+0.07/-0.07
12 mm	+0.10/-0.10

1005T

Fluoropolymer (FEP) Tubing - Tubepack® 5 m

ØD ext.	ØD int.	 R	Clear
4	2.5	20	1005T04 00 25
6	4	50	1005T06 00
8	6	70	1005T08 00
10	8	120	1005T10 00
12	10	180	1005T12 00

1025T

Fluoropolymer (FEP) Tubing - Tubepack® 25 m

ØD ext.	ØD int.	 R	Clear
4	2.5	20	1025T04 00 25
6	4	50	1025T06 00
8	6	70	1025T08 00
10	8	120	1025T10 00
12	10	180	1025T12 00

1050T

Fluoropolymer (FEP) Tubing - Tubepack® 50 m

ØD ext.	ØD int.	 R	Clear
4	2.5	20	1050T04 00 25
6	4	50	1050T06 00
8	6	70	1050T08 00

1100T

Fluoropolymer (FEP) Tubing - Tubepack® 100 m

ØD ext.	ØD int.	 R	Clear
4	2.5	20	1100T04 00 25
6	4	50	1100T06 00
8	6	70	1100T08 00



PFA tubing, the highest-performance product in the Legris range, excels in harsh environments thanks to its exceptional resistance to temperature and chemicals, making it ideal for demanding applications such as the chemical and semiconductor industries.

Technical specifications

	Material:	Perfluoroalkoxy
	Fluids:	Compressed air, industrial water and treated water (with or without glycol)
	Working pressure:	0 to 33 bar
	Working temperature:	-40°C to +150°C
	Diameter:	4 to 12 mm
	Regulations:	RoHS, REACH, PED, UL94 V0, clear version: FDA and EC N° 1935/2004

Performance depends on the fluids, materials and connection used.

Benefits


PFA tubing offers all the advantages of FEP tubing, plus the following characteristics:

- **Superior chemical resistance** allowing it to be used in contact with highly corrosive fluids in the food, pharmaceutical and chemical industries.
- **Superior pressure resistance** at very high temperatures for demanding industrial applications.
- **Also available in an antistatic version** eliminating the risk of electrostatic discharge for applications in electronics or chemistry to reduce the risk of sparks.

Recommended applications




Tubing performance

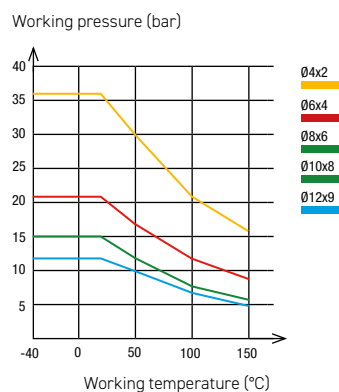

Tube O.D	O.D Tolerance
4 to 8 mm	+0.10/-0.10
10 to 12 mm	+0.15/-0.15


1050T..P

Fluoropolymer (PFA) Tubing - Tubepack® 50 m

ØD ext.	ØD int.		 Clear	 Crystal	 Crystal	 Crystal
4	2	25	1050T04P00	1050T04P12	1050T04P13	1050T04P14
6	4	40	1050T06P00	1050T06P12	1050T06P13	1050T06P14
8	6	60	1050T08P00	1050T08P12	1050T08P13	1050T08P14
10	8	95	1050T10P00			1050T10P14
12	9	145	1050T12P00		1050T12P13	1050T12P14

1100T..P


Fluoropolymer (PFA) Tubing - Tubepack® 100 m

ØD ext.	ØD int.		 Clear
6	4	40	1100T06P00
8	6	60	1100T08P00

1010T..A

Fluoropolymer (PFA) Tubing - Tubepack® 10 m

ØD ext.	ØD int.		
4	2	25	1010T04A01
6	4	40	1010T06A01
8	6	60	1010T08A01
10	8	95	1010T10A01

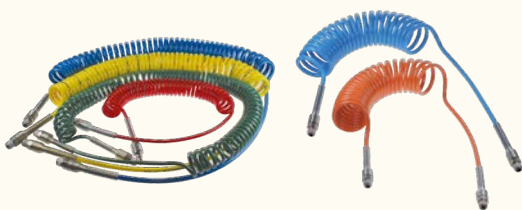

The recoiled tubing retains its shape over time, even after repeated use, providing an alternative to hose reels while delivering significant space savings and ease of use.

Technical specifications

	Material:	PU ester	PA
	Fluids:	Compressed air	Compressed air
	Working pressure:	0 to 10 bar	10 ⁻² millibar to 20 bar
	Working temperature:	-20°C to +70°C	-20°C to +80°C
	Diameter:	4 to 12 mm	4 to 6 mm
	Regulations:	RoHS, REACH, PED	

Performance depends on the fluids, materials and connection used.

Benefits


- **Available with several types of connections**, this tubing is suitable for all types of installation.
- **The PU**, with a reduced coil diameter, offers a **compact solution** ideal for confined spaces.
- **PA guarantees excellent chemical and thermal resistance**, perfectly suited to the most demanding environments.

Recommended applications



PU recoiled tubing performance


Working pressure (bar)

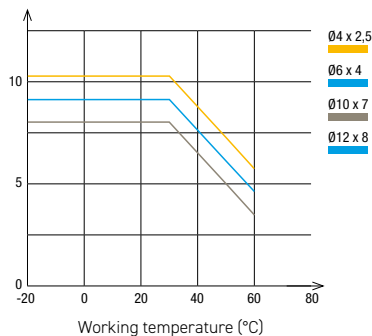

Tube O.D	Pass diameter	O.D Tolerance
8 mm	2.5 to 5.5 mm	+0.10/-0.10
10 to 12 mm	7 to 8 mm	+0.15/-0.15

PA recoiled tubing performance

Working pressure (bar)

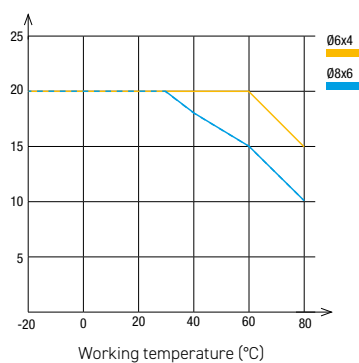

Tube O.D	Pass diameter	O.D Tolerance
6 mm	4 mm	+0.05/-0.10
8 mm	6 mm	+0.05/-0.10

1470U**Polyurethane (PU) Ester Recoil Tubing 2m, Male BSPT Fitting**

ØD ext.	ØD int.	C				Closed overall length	Coil Ø
4	2.5	R1/8	1470U04 03 10	1470U04 04 10	1470U04 05 10	595	24
6	4	R1/4	1470U06 03 13	1470U06 04 13	1470U06 05 13	630	32
8	5	R1/4	1470U08 03 13	1470U08 04 13	1470U08 05 13	780	45
10	7	R1/4		1470U10 04 13	1470U10 05 13	780	65
12	8	R3/8	1470U12 03 17	1470U12 04 17	1470U12 05 17	780	75

Length of long straight section, O.D. < 8 mm: 300 mm Length of long straight section, O.D. ≥ 8 mm: 500 mm
 Length of short straight section, for all O.D.: 100 mm

1471U**Polyurethane (PU) Ester Recoil Tubing 4m, Male BSPT Fitting**

ØD ext.	ØD int.	C				Closed overall length	Coil Ø
4	2.5	R1/8		1471U04 04 10		785	24
6	4	R1/4	1471U06 03 13	1471U06 04 13	1471U06 05 13	850	32
8	5	R1/4	1471U08 03 13	1471U08 04 13	1471U08 05 13	1000	45
10	7	R1/4	1471U10 03 13	1471U10 04 13	1471U10 05 13	1000	65
12	8	R3/8	1471U12 03 17	1471U12 04 17	1471U12 05 17	1140	75

Length of long straight section, O.D. < 8 mm: 300 mm Length of long straight section, O.D. ≥ 8 mm: 500 mm
 Length of short straight section, for all O.D.: 100 mm

1472U**Polyurethane (PU) Ester Recoil Tubing 6m, Male BSPT Fitting**

ØD ext.	ØD int.	C				Closed overall length	Coil Ø
8	5	R1/4	1472U08 03 13	1472U08 04 13	1472U08 05 13	1230	45
10	7	R1/4		1472U10 04 13	1472U10 05 13	1140	65
12	8	R3/8	1472U12 03 17	1472U12 04 17	1472U12 05 17	1190	75

Length of long straight section, O.D. < 8 mm: 300 mm Length of long straight section, O.D. ≥ 8 mm: 500 mm
 Length of short straight section, for all O.D.: 100 mm

1470P**Polyamide (PA) Recoil Tubing 2 m, Male BSPT Fitting**

ØD ext.	ØD int.	C			Closed overall length	Coil Ø
6	4	R1/4	1470P06 04 13	1470P06 07 13	320	60
8	6	R1/4	1470P08 04 13	1470P08 07 13	360	70

Short end length: 100 mm

Long end length: 300 mm

1471P**Polyamide (PA) Recoil Tubing 4 m, Male BSPT Fitting**

ØD ext.	ØD int.	C			Closed overall length	Coil Ø
6	4	R1/4	1471P06 04 13	1471P06 07 13	440	60
8	6	R1/4	1471P08 04 13	1471P08 07 13	520	70

Short end length: 100 mm

Long end length: 300 mm

1472P**Polyamide (PA) Recoil Tubing 6 m, Male BSPT Fitting**

ØD ext.	ØD int.	C			Closed overall length	Coil Ø
6	4	R1/4	1472P06 04 13		560	60
8	6	R1/4	1472P08 04 13	1472P08 07 13	680	70

Short end length: 100 mm

Long end length: 300 mm

SP../050

Polyamide (PA) Coiled Hoses - 5 m

ØD ext.	ØD int.	C	With swivel fitting and protective spring 	With coupling and Series 26 plug 	Coil Ø
7.9	6.3	R1/4	SP08/050/DV	SP08/050/K+S	75
9.5	7.9	R1/4	SP10/050/DV	SP10/050/K+S	115
11.8	9.5	R3/8	SP12/050/DV	SP12/050/K+S	140
15.8	12.7	R1/2	SP16/050/DV		220

SP../075

Polyamide (PA) Coiled Hoses - 7.5 m

ØD ext.	ØD int.	C	With swivel fitting and protective spring 	With coupling and Series 26 plug 	Coil Ø
7.9	6.3	R1/4	SP08/075/DV	SP08/075/K+S	75
9.5	7.9	R1/4	SP10/075/DV	SP10/075/K+S	115
11.8	9.5	R3/8	SP12/075/DV	SP12/075/K+S	140
15.8	12.7	R1/2	SP16/075/DV		220

SP../100

Polyamide (PA) Coiled Hoses - 10 m

ØD ext.	ØD int.	C	With swivel fitting and protective spring 	With coupling and Series 26 plug 	Coil Ø
7.9	6.3	R1/4	SP08/100/DV	SP08/100/K+S	75
9.5	7.9	R1/4	SP10/100/DV	SP10/100/K+S	115
11.8	9.5	R3/8	SP12/100/DV	SP12/100/K+S	140
15.8	12.7	R1/2	SP16/100/DV		220

SP../150

Polyamide (PA) Coiled Hoses - 15 m

ØD ext.	ØD int.	C	With swivel fitting and protective spring 	With coupling and Series 26 plug 	Coil Ø
7.9	6.3	R1/4	SP08/150/DV	SP08/150/K+S	75
9.5	7.9	R1/4	SP10/150/DV	SP10/150/K+S	115
11.8	9.5	R3/8	SP12/150/DV	SP12/150/K+S	140
15.8	12.7	R1/2	SP16/150/DV		220



For customers seeking a hose compatible with hose barb connectors in standard environments, Legris PVC hose is lightweight, flexible and highly resistant to mechanical stress.

Technical specifications


Material:	Translucent PVC Technical PVC with polyester braiding	Blue PVC Technical PVC with polyester braiding
 Fluids:	Compressed air, industrial water	Compressed air
 Working pressure:	0 to 15 bar	0 to 15 bar
 Working temperature:	-20°C to +70°C	-20°C to +60°C
 Diameter:	8 to 26 mm	14.5 to 26.5 mm
 Regulations:	RoHS, REACH, PED, EC N° 1935/2004	RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.

Benefits

- **Three-layer flexible PVC hose reinforced with braided polyester fibres**, offering high mechanical strength and excellent durability.
- **Compatibility with hose barb connectors and Hose barbed couplers**, enabling connections with Legris fittings and Rectus fittings.
- **Translucent PVC version certified to EC Regulation N° 1935/2004** to meet the food industry requirements.

Recommended applications

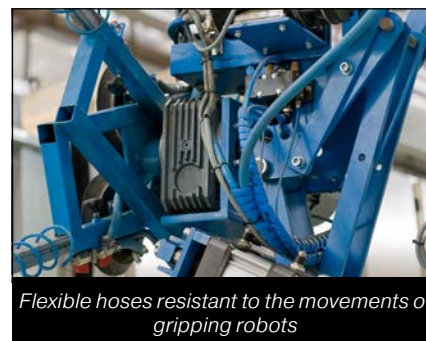


Flexible hoses resistant to the movements of gripping robots

PVC Hose performance

Translucent PVC

Working pressure (bar)



Ø Hose type	Hose I.D	Hose I.D. Tolerance
Translucent PVC	4 to 6 mm 7 to 12 mm 15 to 19 mm	+0.5/-0.5 +0.6/-0.6 +0.8/-0.8
Blue PVC	6.3 mm 9 mm 12.7 mm	+0.3/-0.3 +0.5/-0.5 +0.6/-0.6

1025V

Food-Grade Braided PVC Hose - Reel 25 m

ØD ext.	ØD int.	 R	Clear
8	4	10	1025V08 00 04
11	6	12	1025V11 00 06
13	7	14	1025V13 00 07
14	8	16	1025V14 00 08
16	10	25	1025V16 00 10
18	12	30	1025V18 00 12
23	15	40	1025V23 00 15
26	19	60	1025V26 00 19

1050V

Food-Grade Braided PVC Hose - Reel 50 m

ØD ext.	ØD int.	 R	Clear
11	6	12	1050V11 00 06
14	8	16	1050V14 00 08
16	10	25	1050V16 00 10
18	12	30	1050V18 00 12
23	15	40	1050V23 00 15
26	19	60	1050V26 00 19

1025V..C

Industrial-Grade Braided PVC Hose - Reel 25 m

ØD ext.	ØD int.	 R	Clear
14	9	63	1025V14C04 09
16	10	70	1025V16C04 10
19	12.7	89	1025V19C04 13
23	16	112	1025V23C04 16
27	19	145	1025V27C04 19



Designed for harsh environments, particularly in automotive processes, Legris self-fastening hose combines optimal mechanical and chemical resistance with simplified installation thanks to Legris hose barb connectors.

Technical specifications

	Material:	Nitrile butadiene with polyamide braiding
	Fluids:	Compressed air, treated water (with or without glycol)
	Working pressure:	0 to 16 bar
	Working temperature:	-20°C to +100°C
	Diameter:	6 to 20 mm
	Regulations:	RoHS, REACH, PED

Performance depends on the fluids, materials and connection used.

Benefits


- **Optimal balance** between low insertion force and excellent pull-out resistance, facilitating assembly while ensuring high pressure resistance.
- **Extruded tubing** continuous along its entire length, without seals, ensuring consistent dimensions and flow rate.
- **Resistant** to repeated bending, flames, sparks and UV rays, perfectly suited to demanding and aggressive environments.

Recommended applications



Automotive fitting application

Tubing performance

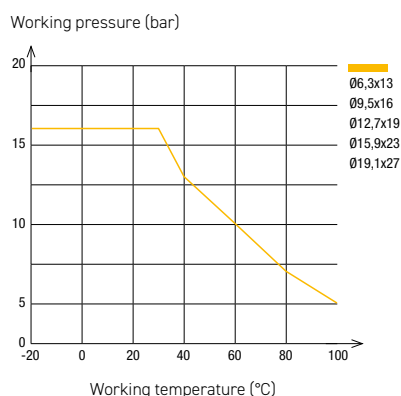

DN mm	Tube I.D	I.D Tolerance
6	6.3 mm	+0.4/-0.4
8	9.5 mm	+0.5/-0.5
12 16 20	12.7 mm 15.9 mm 19.1 mm	+0.6/-0.6

1040H

Braided Self-Fastening NBR Hose - Drum 40 m

DN	ØD ext.	ØD int.					
6	13	6.3	60	1040H56 01	1040H56 02	1040H56 03	1040H56 04
8	16	9.5	70	1040H60 01	1040H60 02	1040H60 03	1040H60 04
12	19	12.7	120	1040H62 01	1040H62 02	1040H62 03	1040H62 04
16	23	15.9	140	1040H66 01	1040H66 02	1040H66 03	1040H66 04
20	27	19.1	170	1040H69 01	1040H69 02	1040H69 03	1040H69 04

1080H

Braided Self-Fastening NBR Hose - Drum 80 m

DN	ØD ext.	ØD int.					
16	23	15.9	140	1080H66 01	1080H66 02	1080H66 03	1080H66 04
20	27	19.1	170	1080H69 01	1080H69 02	1080H69 03	1080H69 04

1100H

Braided Self-Fastening NBR Hose - Drum 100 m

DN	ØD ext.	ØD int.					
6	13	6.3	60		1100H56 02	1100H56 03	1100H56 04
8	16	9.5	70	1100H60 01	1100H60 02	1100H60 03	1100H60 04
12	19	12.7	120	1100H62 01	1100H62 02	1100H62 03	1100H62 04

**Related Products****0132**

Self-Fastening Barb Connector for Brass Compression Fitting

**0133..39**

Self-Fastening Barb Connector with Bi-Material Seal, Male BSPP Thread

**0134**

Self-Fastening Barb Connector, Male BSPT Thread



Find the sockets in the Connection Accessories section on page 316.



Recommended assembly tool: Parker 611050HV - Page 311

07

ESSENTIAL SUPPLEMENTS

Designed to meet all your connection needs, the Legris and Rectus range of accessories covers the entire circuit — from adapters to blowguns — for easy-to-assemble installations.

RELIABLE SOLUTIONS

Manufactured to the same quality standards as Legris fittings and Rectus couplers, the wide range of connection accessories guarantees the reliability and performance of installations, regardless of space constraints and environments.

WIDE AVAILABILITY

Versatile accessories available in various materials and shapes, readily sourced through our distributors for numerous uses.





CONNECTION ACCESSORIES

PRODUCTS OFFER

RANGE OF ACCESSORIES		Fluids	Materials (body/seal)	Maximum operating pressure (bar)	Temperature		PAGE
					Min.	Max.	
ADAPTERS		 Compressed air	Brass	200	-40°C	+150°C	294
		  Compressed air and industrial water	Nickel-plated brass	60	-10°C	+80°C	298
		  Compressed air and industrial water	Stainless steel	200	-20°C	+180°C	301
PLUGS		 Compressed air	Brass	200	-60°C	+180°C	304
		  Compressed air and industrial water	Nickel-plated brass				306
		  Compressed air and industrial water	Steel				306
MANIFOLDS		 Compressed air	Brass	20	-10°C	+80°C	308
		 Compressed air	Aluminium				309
ACCESSORIES RANGE	for the fittings 	 Compressed air	The specifications of the accessories are linked to each range.				310
	for the couplers 	  Compressed air and industrial water					311
	for the tubes 	 Compressed air					312
	for the valves 	  Compressed air and industrial water					316
BLOWGUNS	Premium 	 Compressed air	Technical polymer/NBR/ nickel-plated brass	10	-20°C	+80°C	318
	energy-saving 		Technical polymer/NBR/ nickel-plated brass	10	-20°C	+80°C	320
	Safety 		Technical polymer/NBR/ nickel-plated brass	10	-20°C	+80°C	321
	Standard 		Technical polymer/NBR/ aluminium	10	-20°C	+80°C	323
WATER PISTOLS AND WORKSHOP BLOWGUNS	 	  Industrial water oils and lubricants	Treated zamak, nickel- plated brass/NBR	20	-20°C	+100°C	324

WHAT TYPE OF FLUID DO YOU WISH TO CONVEY?



Parker offers ranges dedicated to **compressed air and neutral gases**.



Parker presents ranges specifically designed for **water**, including:

- *Industrial water (tap water)*
- *Treated water (deionised, pure and demineralised)*

All our solutions are compatible with glycol mixtures.



Parker offers ranges for **oils and lubricants**.



Legris Rectus adapters effectively complement installations equipped with Legris fittings and Rectus couplers, in standard, aggressive or corrosive environments. With a wide range of shapes, they allow for a variety of connection configurations.

Technical specifications

	Materials:	Brass	Nickel-plated brass	Stainless steel
	Fluids:	Compressed air	Compressed air	Air/industrial water and treated water
	Operating pressure:	200 bar	60 bar	200 bar
	Operating temperature:	-40°C to +150°C	-10°C to +80°C	- 40°C to +180°C
	Connection:	G1/8 to G3/4 R1/8 to R1 1/4 NPTF 1/8 to NPTF 3/4	M5x0.8 R1/8 to R 1/2	G1/8 to G1 R1/8 to R1 1/4 NPT to 1/2 NPT

Performance depends on the fluids, materials and tube used.

Benefits

- **Wide range of products:** thanks to the wide choice of adapter configurations, users are sure to find the right product for their specific needs, whether for connections, transitions or adaptations.
- **Robustness:** Legris Rectus adapters are manufactured from **high-quality** forged materials, guaranteeing excellent mechanical strength and corrosion resistance.

0143

Equal Threaded Elbow, Female BSPP Thread

Brass



Scan for more dimensions



C	References
G1/8	0143 10 10
G1/4	0143 13 13
G3/8	0143 17 17
G1/2	0143 21 21
G3/4	0143 27 27

0144

Equal Stud Elbow, Male BSPT/Female BSPP Thread

Brass



C1

C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0144 10 10
R1/4	G1/4	0144 13 13
R3/8	G3/8	0144 17 17
R1/2	G1/2	0144 21 21
R3/4	G3/4	0144 27 27

0152

Equal Elbow, Male BSPT Thread

Brass



Scan for more dimensions



C	References
R1/8	0152 10 10
R1/4	0152 13 13
R3/8	0152 17 17
R1/2	0152 21 21
R3/4	0152 27 27

0145

Equal Tee, Female BSPP Thread

Brass



Scan for more dimensions



C	References
G1/8	0145 10 10
G1/4	0145 13 13
G3/8	0145 17 17
G1/2	0145 21 21
G3/4	0145 27 27

0158

Stud Branch Tee, Male BSPT/Female BSPP Thread

Brass



C1

C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0158 10 10
R1/4	G1/4	0158 13 13
R3/8	G3/8	0158 17 17
R1/2	G1/2	0158 21 21
R3/4	G3/4	0158 27 27

ZO

2 Way Manifold

Brass



Scan for more dimensions



A	References
G3/8 i.	ZO17
G1/2 i.	ZO21

DO

3 Way Manifold

Brass



Scan for more dimensions



A	References
G3/8 i.	DO17
G1/2 i.	DO21

YA

Female Y with one Male Thread

Brass



Scan for more dimensions



A	References
R1/8 o. / G1/8 i.	YA10
R1/4 o., G1/4 i.	YA13
R3/8 o., G3/8 i.	YA17
R1/2 o., G1/2 i.	YA21

2x Female Thread / 1x Male Thread con.

YI

Female Y

Brass



Scan for more dimensions



A	References
G1/8	YI10
G1/4	YI13
G3/8	YI17
G1/2	YI21

3x Female Thread

0117

Equal Bulkhead Coupling, Female
BSPP and Metric Thread

Brass



Scan for more
dimensions



C	References
M5x0.8	0117 00 19
G1/8	0117 00 10
G1/4	0117 00 13
G3/8	0117 00 17
G1/2	0117 00 21
G3/4	0117 00 27
G1	0117 00 34
G1 1/4	0117 00 42
G1 1/2	0117 00 49

Delivered with not assembled nuts

RL

Reducing Bush, long

Brass



Scan for more
dimensions



C1	C2	References
M5	M5	RL05/05
G1/8	M5	RL05/10
G1/8	G1/8	RL10/10*
G1/8	G1/4	RL10/13*
G1/4	G1/8	RL13/10*
G1/4	G1/4	RL13/13*
G1/4	G3/8	RL13/17*
G3/8	G1/2	RL17/13*
G3/8	G3/8	RL17/17*
G3/8	G1/2	RL17/21*
G1/2	G3/8	RL21/17*
G1/2	G1/2	RL21/21*
G1/2	G1/4	RL21/26*

* Inner Cone 45°

C1: Male Thread C2: Female Thread

0163

Unequal Reducer, Male BSPT/Female
BSPP Thread

Brass



Scan for more
dimensions



C1	C2	References
R1/4	G1/8	0163 13 10
R3/8	G1/8	0163 17 10
R3/8	G1/4	0163 17 13
R1/2	G1/8	0163 21 10
R1/2	G1/4	0163 21 13
R1/2	G3/8	0163 21 17
R3/4	G1/4	0163 27 13
R3/4	G3/8	0163 27 17
R3/4	G1/2	0163 27 21
R1	G3/4	0163 34 27

207ACBH

Bulkhead Union, Female NPTF Thread

Brass



Scan for more
dimensions



C	References
NPTF1/8	207ACBH-2
NPTF1/4	207ACBH-4
NPTF3/8	207ACBH-6
NPTF1/2	207ACBH-8

* F and F1 in Inch dimensions

0164

Adaptor, Male NPT/Female BSPP
Thread

Brass



Scan for more
dimensions



C1	C2	References
NPT1/8	G1/8	0164 11 10
NPT1/4	G1/4	0164 14 13
NPT3/8	G3/8	0164 18 17
NPT1/2	G1/2	0164 22 21
NPT3/4	G3/4	0164 28 27

Adaptor for female socket of quick-acting mould couplers

0155

Equal Connector, Female BSPP
Thread

Brass



Scan for more
dimensions




C	C1	References
G1/8		0155 10 10
G1/4	G1/8	0155 10 13
G1/4		0155 13 13
G3/8		0155 17 17
G1/2		0155 21 21
G3/4		0155 27 27
G1		0155 34 34

0167

Adaptor, Male BSPT/Female NPT
Thread

Brass



Scan for more
dimensions



C1	C2	References
R1/8	NPT1/8	0167 10 11
R1/4	NPT1/4	0167 13 14
R3/8	NPT3/8	0167 17 18
R1/2	NPT1/2	0167 21 22
R3/4	NPT3/4	0167 27 28

Adaptor for female socket of quick-acting mould couplers

0168

Reducer, Male BSPP/Female BSPP
and Metric Thread

Brass, technical polymer



Scan for more
dimensions



C1	C2	References
G1/8	M5x0.8	0168 10 19
G1/4	M5x0.8	0168 13 19
G1/4	G1/8	0168 13 10
G3/8	G1/8	0168 17 10
G3/8	G1/4	0168 17 13
G1/2	G1/8	0168 21 10
G1/2	G1/4	0168 21 13
G1/2	G3/8	0168 21 17
G3/4	G1/4	0168 27 13
G3/4	G3/8	0168 27 17
G3/4	G1/2	0168 27 21

With fitted captive seal

209P**Reducer, Male/Female NPTF Thread**

Brass



C	C1	References
NPTF1/4	NPTF1/8	209P-4-2
NPTF3/8	NPTF1/8	209P-6-2
NPTF3/8	NPTF1/4	209P-6-4
NPTF1/2	NPTF1/8	209P-8-2
NPTF1/2	NPTF1/4	209P-8-4
NPTF1/2	NPTF3/8	209P-8-6
NPTF3/4	NPTF1/4	209P-12-4
NPTF3/4	NPTF3/8	209P-12-6
NPTF3/4	NPTF1/2	209P-12-8

* F in Inch dimensions

0169**Increaser, Male/Female BSPP Thread**

Brass, technical polymer



C1	C2	References
G1/8	G1/4	0169 10 13
G1/8	G3/8	0169 10 17
G1/4	G3/8	0169 13 17
G1/4	G1/2	0169 13 21
G3/8	G1/2	0169 17 21
G3/8	G3/4	0169 17 27
G1/2	G3/4	0169 21 27

With fitted captive seal

FG43**Increaser, Female BSPP/Male BSPT Thread**


Brass



C	C1	References
R1/8	G1/4	1/4X1/8FG43B
R1/8	G3/8	3/8X1/8FG43B
R1/4	G3/8	3/8X1/4FG43B
R1/2	G3/4	3/4X1/2FG43B

0121**Equal/Unequal Straight Male Adaptor, Male BSPT Thread**


Brass

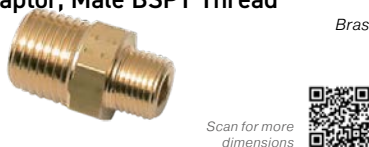

C1	C2	References
R1/8	R1/8	0121 10 10
R1/4	R1/8	0121 13 10
R1/4	R1/4	0121 13 13
R3/8	R1/8	0121 17 10
R3/8	R1/4	0121 17 13
R3/8	R3/8	0121 17 17
R1/2	R1/8	0121 21 10
R1/2	R1/4	0121 21 13
R1/2	R3/8	0121 21 17
R1/2	R1/2	0121 21 21
R3/4	R1/4	0121 27 13
R3/4	R3/8	0121 27 17
R3/4	R1/2	0121 27 21
R3/4	R3/4	0121 27 27
R1	R3/8	0121 34 17
R1	R1/2	0121 34 21
R1	R3/4	0121 34 27
R1	R1	0121 34 34
R1 1/4	R1/2	0121 42 21
R1 1/4	R3/4	0121 42 27
R1 1/4	R1	0121 42 34
R1 1/4	R1 1/4	0121 42 42

FF44**Equal Adaptor, Male BSPP Thread**

Brass



C	References
G1/8	1/8FF44B
G1/4	1/4FF44B
G3/8	3/8FF44B
G1/2	1/2FF44B

These parts are supplied with two copper seals.

0121**Equal Adaptor, Male NPT/BSPT Thread**

Brass



C1	C2	References
NPT1/8	R1/8	0121 11 10
NPT1/4	R1/4	0121 14 13
NPT3/8	R3/8	0121 18 17
NPT1/2	R1/2	0121 22 21
NPT3/4	R3/4	0121 28 27

0929..1**Equal 3-Piece Adaptor, Male BSPT Thread with seal**

Brass



C	References
R1/8	0929 01 10
R1/4	0929 01 13
R3/8	0929 01 17
R1/2	0929 01 21
R3/4	0929 01 27
R1	0929 01 34

This connection accessory makes assembly much easier thanks to its 3-piece design.

To join 2 threaded components, simply push together and tighten the sleeve nut, thus reducing installation time.

Maximum working pressure: 50 bar.

Working temperature: -10° to +80°C. Supplied with seal

0912

Equal Stud Elbow, Female BSPP and Metric Thread

Nickel-plated brass



Scan for more dimensions



C	References
G1/8	0912 00 10
G1/4	0912 00 13
G3/8	0912 00 17
G1/2	0912 00 21
G3/4	0912 00 27
G1	0912 00 34

0921

Equal Stud Elbow, Male/Female and Metric Thread

Nickel-plated brass



Scan for more dimensions



C	References
M5x0.8	0921 00 19

0913

Equal Stud Elbow, Male BSPT/Female BSPP Thread

Nickel-plated brass



C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0913 00 10
R1/4	G1/4	0913 00 13
R3/8	G3/8	0913 00 17
R1/2	G1/2	0913 00 21
R3/4	G3/4	0913 00 27
R1	G1	0913 00 34

0914

Equal Stud Elbow, Male BSPT Thread

Nickel-plated brass



Scan for more dimensions



C	References
R1/8	0914 00 10
R1/4	0914 00 13
R3/8	0914 00 17
R1/2	0914 00 21
R3/4	0914 00 27
R1	0914 00 34

0910

Equal Y, Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



C	References
G1/8	0910 00 10
G1/4	0910 00 13
G3/8	0910 00 17
G1/2	0910 00 21

0911

Equal Y, Male BSPT/Female BSPP Thread

Nickel-plated brass



C1

C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0911 00 10
R1/4	G1/4	0911 00 13
R3/8	G3/8	0911 00 17
R1/2	G1/2	0911 00 21

0915

Equal Tee, Female BSPP and Metric Thread

Nickel-plated brass



Scan for more dimensions



C	References
M5x0.8	0915 00 19
G1/8	0915 00 10
G1/4	0915 00 13
G3/8	0915 00 17
G1/2	0915 00 21
G3/4	0915 00 27
G1	0915 00 34

0916

Equal Stud Run Tee, Female BSPP/ Male BSPT Thread BSPP Thread

Nickel-plated brass



C1

C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0916 00 10
R1/4	G1/4	0916 00 13
R3/8	G3/8	0916 00 17
R1/2	G1/2	0916 00 21
R3/4	G3/4	0916 00 27

0917

Equal Stud Run Tee, Female BSPP/ Male BSPT Thread

Nickel-plated brass



C1

C2

Scan for more dimensions



C1	C2	References
R1/8	G1/8	0917 00 10
R1/4	G1/4	0917 00 13
R3/8	G3/8	0917 00 17
R1/2	G1/2	0917 00 21
R3/4	G3/4	0917 00 27

0927

Equal Tee, Male BSPT Thread

Nickel-plated brass



Scan for more dimensions



C	References
R1/8	0927 00 10
R1/4	0927 00 13
R3/8	0927 00 17
R1/2	0927 00 21
R3/4	0927 00 27

0928

Equal Stud Branch Tee, Male BSPT/
Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
R1/8	G1/8	0928 00 10
R1/4	G1/4	0928 00 13
R3/8	G3/8	0928 00 17
R1/2	G1/2	0928 00 21

0932

Equal Stud Run Tee, Male BSPT/
Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
R1/8	G1/8	0932 00 10
R1/4	G1/4	0932 00 13
R3/8	G3/8	0932 00 17
R1/2	G1/2	0932 00 21
R3/4	G3/4	0932 00 27

0908

Equal Cross, Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



C	References
G1/8	0908 00 10
G1/4	0908 00 13
G3/8	0908 00 17
G1/2	0908 00 21

0909

Equal Cross, Male BSPT/Female
BSPP Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
R1/8	G1/8	0909 00 10
R1/4	G1/4	0909 00 13
R3/8	G3/8	0909 00 17
R1/2	G1/2	0909 00 21

0178

Reducer, Male/Female BSPP and
Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



C1	C2	References
G1/8	M5x0.8	0178 10 19
G1/4	G1/8	0178 13 10
G3/8	G1/8	0178 17 10
G3/8	G1/4	0178 17 13
G1/2	G1/4	0178 21 13
G1/2	G3/8	0178 21 17
G3/4	G1/2	0178 27 21

With integrated O-ring seal

0903

Reducer, Male/Female BSPP Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
G1/4	G1/8	0903 10 13
G3/8	G1/4	0903 13 17
G1/2	G3/8	0903 17 21
G3/4	G1/2	0903 21 27
G1	G3/4	0903 27 34

C1: external thread / C2: internal thread

0904

Reducer, Male BSPT/Female BSPP
Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
R1/4	G1/8	0904 10 13
R3/8	G1/8	0904 10 17
R1/2	G1/8	0904 10 21
R3/8	G1/4	0904 13 17
R1/2	G1/4	0904 13 21
R1/2	G3/8	0904 17 21
R3/4	G3/8	0904 17 27
R3/4	G1/2	0904 21 27
R1	G1/2	0904 21 34
R1	G3/4	0904 27 34

0905

Reducer, Male BSPP/Female BSPP
and Metric Thread

Nickel-plated brass



Scan for more dimensions



C1	C2	References
G1/8	M5x0.8	0905 19 10
G1/4	G1/8	0905 10 13
G3/8	G1/8	0905 10 17
	G1/4	0905 13 17
G1/2	G1/4	0905 13 21
	G3/8	0905 17 21
G3/4	G3/8	0905 17 27
	G1/2	0905 21 27

0906

Increaser, Male BSPP and Metric/Female BSPP Thread

Nickel-plated brass



C1	C2	References
M5x0.8	G1/8	0906 10 19
	G1/8	0906 00 10
G1/8	G1/4	0906 10 13
	G3/8	0906 10 17
	G1/4	0906 00 13
G1/4	G3/8	0906 13 17
	G1/2	0906 13 21
	G3/8	0906 00 17
G3/8	G1/2	0906 17 21
	G1/2	0906 00 21

0920

Bulkhead Connector, Female BSPP and Metric Thread

Nickel-plated brass



C	C1	References
M5x0.8	M10x1	0920 00 19
G1/8	M16x1.5	0920 00 10
G1/4	M20x1.5	0920 00 13
G3/8	M26x1.5	0920 00 17
G1/2	M28x1.5	0920 00 21

0902

Equal and Unequal Adaptor, Female BSPP and Metric Thread

Nickel-plated brass



C1	C2	References
M5x0.8	M5x0.8	0902 00 19
	G1/8	0902 19 10
	G1/8	0902 00 10
G1/8	G1/4	0902 10 13
	G3/8	0902 10 17
	G1/4	0902 00 13
G1/4	G3/8	0902 13 17
	G1/2	0902 13 21
	G3/8	0902 00 17
G3/8	G1/2	0902 17 21
	G1/2	0902 00 21
G1/2	G3/4	0902 21 27
	G3/4	0902 00 27

0933

Increaser, Male BSPT/Female BSPP Thread

Nickel-plated brass



C1	C2	References
R1/8	G1/8	0933 00 10
R1/4	G1/4	0933 00 13
R3/8	G3/8	0933 00 17
R1/2	G1/2	0933 00 21
R1/8	G1/4	0933 10 13
R1/4	G3/8	0933 13 17
R1/4	G1/2	0933 13 21
R3/8	G1/2	0933 17 21
R1/2	G3/4	0933 21 27

0900

Equal and Unequal Adaptor, Male BSPT Thread

Nickel-plated brass



C1	C2	References
R1/8	R1/8	0900 00 10
	R1/4	0900 10 13
	R3/8	0900 10 17
R1/4	R1/4	0900 00 13
	R3/8	0900 13 17
	R1/2	0900 13 21
R3/8	R3/8	0900 00 17
	R1/2	0900 17 21
	R1/2	0900 00 21
R1/2	R3/4	0900 21 27
	R3/4	0900 00 27
R3/4	R1	0900 27 34
	R1	0900 00 34

0192

Unequal Straight Adaptor, Male BSPT/BSPP Thread

Nickel-plated brass



C1	C2	References
R1/8	G1/4	0192 10 13
R1/4	G1/4	0192 13 13
R1/4	G1/2	0192 13 21
R3/8	G1/4	0192 17 13
R3/8	G1/2	0192 17 21
R1/2	G1/2	0192 21 21

0907

Equal Extended Adaptor, Male/Female BSPP Thread

Nickel-plated brass



C	References
G1/8	0907 00 10
	0907 00 10 01
G1/4	0907 00 13
	0907 00 13 01

0901

Equal and Unequal Adaptor, Male BSPP and Metric Thread

Nickel-plated brass



C1	C2	References
M5x0.8	M5x0.8	0901 00 19
	G1/8	0901 19 10
G1/8	G1/8	0901 00 10
	G1/4	0901 10 13
G1/4	G1/4	0901 00 13
	G3/8	0901 13 17
	G1/2	0901 13 21
G3/8	G3/8	0901 00 17
	G1/2	0901 17 21
G1/2	G1/2	0901 00 21

1844

Equal Stud Elbow, Male BSPT/Female BSPP Thread

Stainless steel 316L



C1	C2	References
R1/8	G1/8	1844 10 10
R1/4	G1/4	1844 13 13
R3/8	G3/8	1844 17 17
R1/2	G1/2	1844 21 21
R3/4	G3/4	1844 27 27
R1	G1	1844 34 34

1843

Equal Elbow, Female BSPP Thread

Stainless steel 316L




C	References
G1/8	1843 10 10
G1/4	1843 13 13
G3/8	1843 17 17
G1/2	1843 21 21
G3/4	1843 27 27
G1	1843 34 34

1845

Equal Tee, Female BSPP Thread

Stainless steel 316L



C	References
G1/8	1845 10 10
G1/4	1845 13 13
G3/8	1845 17 17
G1/2	1845 21 21
G3/4	1845 27 27
G1	1845 34 34

1817

Equal Bulkhead Adaptor, Female BSPP Thread

Stainless steel 316L



C	References
G1/8	1817 00 10
G1/4	1817 00 13
G3/8	1817 00 17
G1/2	1817 00 21
G3/4	1817 00 27
G1	1817 00 34

1871

Equal Bulkhead Adaptor, Female NPT Thread

Stainless steel 316L




C	References
NPT1/8	1871 00 11
NPT1/4	1871 00 14
NPT3/8	1871 00 18
NPT1/2	1871 00 22

1855

Equal Connector, Female BSPP Thread

Stainless steel 316L




C	References
G1/8	1855 10 10
G1/4	1855 13 13
G3/8	1855 17 17
G1/2	1855 21 21
G3/4	1855 27 27
G1	1855 34 34

1870

Equal Connector, Female NPT Thread

Stainless steel 316L




C	References
NPT1/8	1870 11 11
NPT1/4	1870 14 14
NPT3/8	1870 18 18
NPT1/2	1870 22 22

1862

Reducer Connector, Female BSPP Thread

Stainless steel 316L



C1	C2	References
G1/4	G1/8	1862 13 10
G3/8	G1/8	1862 17 10
	G1/4	1862 17 13
G1/2	G1/4	1862 21 13
	G3/8	1862 21 17
G3/4	G1/2	1862 27 21
G1	G3/4	1862 34 27

1864**Adaptor, Male NPT/Female BSPP
Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
NPT1/8	G1/8	1864 11 10
NPT1/4	G1/4	1864 14 13
NPT3/8	G3/8	1864 18 17
NPT1/2	G1/2	1864 22 21

1867**Adaptor, Male BSPT/Female NPT
Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
R1/8	NPT1/8	1867 10 11
R1/4	NPT1/4	1867 13 14
R3/8	NPT3/8	1867 17 18
R1/2	NPT1/2	1867 21 22

1863**Reducer, Male BSPT/Female BSPP
Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
R1/4	G1/8	1863 13 10
R3/8	G1/8	1863 17 10
	G1/4	1863 17 13
R1/2	G1/4	1863 21 13
	G3/8	1863 21 17
R3/4	G1/2	1863 27 21
R1	G3/4	1863 34 27

1872**Reducer, Male/Female NPT Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
NPT1/4	NPT1/8	1872 14 11
NPT3/8	NPT1/8	1872 18 11
NPT3/8	NPT1/4	1872 18 14
NPT1/2	NPT1/4	1872 22 14
NPT1/2	NPT3/8	1872 22 18

1861**Increaser, Male BSPT/Female BSPP
Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
R1/8	G1/4	1861 10 13
R1/8	G3/8	1861 10 17
R1/4	G3/8	1861 13 17
R1/4	G1/2	1861 13 21
R3/8	G1/2	1861 17 21
R1/2	G3/4	1861 21 27
R3/4	G1	1861 27 34

1873**Increaser, Male/Female NPT Thread***Stainless steel 316L*

C1



C2

Scan for more
dimensions

C1	C2	References
NPT1/8	NPT1/4	1873 11 14
	NPT3/8	1873 11 18
NPT1/4	NPT3/8	1873 14 18
	NPT1/2	1873 14 22
NPT3/8	NPT1/2	1873 18 22

1821

Equal and Unequal Adaptor, Male
BSPT Thread *Stainless steel 316L*



Scan for more
dimensions

C1	C2	References
R1/8	R1/8	1821 10 10
R1/4	R1/8	1821 13 10
	R1/4	1821 13 13
R3/8	R1/4	1821 17 13
	R3/8	1821 17 17
	R3/8	1821 21 17
R1/2	R1/2	1821 21 21
R3/4	R1/2	1821 27 21
	R3/4	1821 27 27
	R3/4	1821 34 27
R1	R3/4	1821 34 27
	R1	1821 34 34

1821

Equal Adaptor, Male NPT Thread *Stainless steel 316L*



Scan for more
dimensions

C	References
NPT1/8	1821 11 11
NPT1/4	1821 14 14
NPT3/8	1821 18 18
NPT1/2	1821 22 22



Legris plugs are designed to combine compactness and robustness to effectively seal circuits.

Technical specifications

	Materials:	Brass	Nickel-plated brass	Steel	Stainless steel
	Fluids:	Compressed air	Compressed air	Compressed air	Compressed air and industrial water
	Operating pressure:	200 bar	60 bar	200 bar	200 bar
	Operating temperature:	-40°C to +150°C	-10°C to +80°C	-10°C to +80°C	- 40°C to +180°C
	Connection:	M6x1 to M30x2 R1/16 to R2 NPT 1/8 to NPT 1 NPTF1/8 to NPTF1/2	M5x0.8 to M7x1 G1/8 to G1 R1/8 to R1/2	M8x1.25 G1/8 to G1 R1/8 to R 1 ½ NPT1/16 to NPT1	R1/8 to R 1 1/8 NPT to 1/2 NPT

Performance depends on the fluids, materials and tube used.

Benefits

- **Designed in several materials**, they offer a choice suited to environments ranging from **standard conditions to the most aggressive ones**.
- **Compact models** of internal hexagon plugs are perfectly suited for applications in confined spaces.

BRASS VERSIONS

0205

Internal Hexagon Head Plug, Male
BSPT Thread

Brass

Scan for more
dimensions

C	References
R1/16	0205 07 00
R1/8	0205 10 00
R1/4	0205 13 00
R3/8	0205 17 00
R1/2	0205 21 00
R3/4	0205 27 00
R1	0205 34 00
R1 1/4	0205 42 00
R1 1/2	0205 49 00
R2	0205 48 00

For BSPT plugs from 1/2" to 1 1/2" inclusive:
General characteristics in accordance with DIN 906.
Thread in accordance with EN 10226-1.

0205

Internal Hexagon Head Plug, Male
NPT Thread

Brass

Scan for more
dimensions

C	References
NPT1/8	0205 11 00
NPT1/4	0205 14 00
NPT3/8	0205 18 00
NPT1/2	0205 22 00
NPT3/4	0205 28 00
NPT1	0205 35 00

0209

Square Head Plug, Male BSPT Thread

Brass

Scan for more
dimensions

C	References
R1/8	0209 10 00
R1/4	0209 13 00
R3/8	0209 17 00
R1/2	0209 21 00
R3/4	0209 27 00

General characteristics in accordance with DIN 906.
Thread in accordance with EN 10226-1.

0200

Hex Head Plug, Male BSPP and Metric
Thread

Brass

Scan for more
dimensions

C	References
M6x1	0200 52 00
M8x1.25	0200 57 00
M10x1	0200 60 00
M12x1	0200 65 00
M12x1.25	0200 66 00
G1/8	0200 10 00
G1/4	0200 13 00

0201

Hex Head Plug with Collar, Male BSPP
and Metric Thread

Brass

Scan for more
dimensions

C	References
M16x1.5	0201 75 00
M18x1.5	0201 78 00
M20x1.5	0201 80 00
M22x1.5	0201 82 00
M24x1.5	0201 83 00
M24x2	0201 92 00
M30x2	0201 88 00
G3/8	0201 17 00
G1/2	0201 21 00
G3/4	0201 27 00
G1	0201 34 00
G1 1/4	0201 42 00

0202

Internal Hexagon Head Plug with
Collar, Male Metric Thread

Brass

Scan for more
dimensions

C	References
M12x1	0202 65 00
M12x1.25	0202 66 00
M14x1.5	0202 71 00
M16x1.5	0202 75 00
M18x1.5	0202 78 00
M20x1.5	0202 80 00
M22x1.5	0202 82 00
M27x2	0202 86 00
M30x2	0202 88 00

Parallel metric threads, ISO standard NFE 03-054

VZ

Blanking Plug - Socket Pipe (DIN 908)

Brass

Scan for more
dimensions

A	References
M5	VZ05
G1/8	VZ10
G1/4	VZ13
G3/8	VZ17
G1/2	VZ21
G3/4	VZ26

HP3

Hexagon Head Plug, Male BSPT
Thread

Brass

Scan for more
dimensions

C	References
R1/8	1/8HP3B
R1/4	1/4HP3B
R3/8	3/8HP3B
R1/2	1/2HP3B
R3/4	3/4HP3B

NICKEL-PLATED BRASS VERSIONS

0222

Internal Hex Plug, Male BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



C	References
M5x0.8	0222 19 00
M7x1	0222 55 00
G1/8	0222 10 00
G1/4	0222 13 00
G3/8	0222 17 00
G1/2	0222 21 00

With integrated O-ring seal

0936

Internal Hexagon Head Plug, Male BSPT Thread

Nickel-plated brass



Scan for more dimensions



C	References
R1/8	0936 00 10
R1/4	0936 00 13
R3/8	0936 00 17
R1/2	0936 00 21

0919

Internal Hexagon Head Plug, Male BSPP and Metric Thread without seal

Nickel-plated brass



Scan for more dimensions



C	References
M5x0.8	0919 00 19
G1/8	0919 00 10
G1/4	0919 00 13
G3/8	0919 00 17
G1/2	0919 00 21
G3/4	0919 00 27
G1	0919 00 34

0919..1

Internal Hexagon Head Plug, Male BSPP and Metric Thread with seal

Nickel-plated brass



C	References
G1/8	0919 01 10
G1/4	0919 01 13
G3/8	0919 01 17
G1/2	0919 01 21

STEEL VERSIONS

0206

Internal Hexagon Head Plug, Male BSPT Thread

Steel



Scan for more dimensions



C	References
R1/8	0206 10 00
R1/4	0206 13 00
R3/8	0206 17 00
R1/2	0206 21 00
R3/4	0206 27 00
R1	0206 34 00
R1 1/4	0206 42 00
R1 1/2	0206 49 00

General characteristics in accordance with DIN 906.
Thread in accordance with EN 10226-1.

0206

Internal Hexagon Head Plug, Male NPT Thread

Steel



Scan for more dimensions



C	References
NPT1/16	0206 08 00
NPT1/8	0206 11 00
NPT1/4	0206 14 00
NPT3/8	0206 18 00
NPT1/2	0206 22 00
NPT3/4	0206 28 00
NPT1	0206 35 00

0210

Hex Head Plug, Male BSPP and Metric Thread

Steel



Scan for more dimensions



C	References
M8x1.25	0210 57 00
G1/8	0210 10 00
G1/4	0210 13 00
G3/8	0210 17 00
G1/2	0210 21 00
G3/4	0210 27 00
G1	0210 34 00

Groove profile according to DIN 3852-1, form D/E.
BSPP thread, ISO 228-1.
Metric ISO cylindrical thread, NFE 03-054.

0216

Hex Head Plug, Male BSPT Thread

Steel



Scan for more
dimensions



C	References
R1/8	0216 10 00
R1/4	0216 13 00
R3/8	0216 17 00
R1/2	0216 21 00

BSPT thread conforms to EN 10226-1

0216

Hex Head Plug, Male NPT Thread

Steel



Scan for more
dimensions



C	References
NPT1/8	0216 11 00
NPT1/4	0216 14 00
NPT1/2	0216 22 00

STAINLESS STEEL VERSIONS

0285

Internal Hexagon Head Plug, Male BSPT Thread

Stainless steel 316L



Scan for more
dimensions



C	References
R1/8	0285 10 00
R1/4	0285 13 00
R3/8	0285 17 00
R1/2	0285 21 00
R3/4	0285 27 00
R1	0285 34 00

Conforms to DIN 906. Thread: EN 10226-1

0285

Internal Hexagon Head Plug, Male NPT Thread

Stainless steel 316L



Scan for more
dimensions



C	References
NPT1/8	0285 11 00
NPT1/4	0285 14 00
NPT3/8	0285 18 00
NPT1/2	0285 22 00

Conforms to ANSI B1.20.1



Designed to connect threaded fittings or tubes using push-in fitting technology, Legris manifolds enable rapid installation and offer optimal modularity for pneumatic circuits.

Technical specifications

	Materials:	Brass	Anodised aluminium
	Fluids:	Compressed air	Compressed air and industrial water
	Operating pressure:	20 bar	20 bar
	Operating temperature:	-10°C to +80°C	-10°C to +80°C
	Connection:	G 1/4 to G 3/4	G 1/8 to G 1/2

Performance depends on the fluids, materials and tube used.

Benefits

- **Lightweight and strong:** Legris manifolds, made of anodised aluminium, combine lightness with resistance to harsh environments, making them particularly suitable for repeated assembly and disassembly operations.
- **Models equipped with push-in fittings** (models 3310) save assembly time and provide a very high level of sealing.

BRASS VERSIONS

0135

Manifold Block, Female BSPP Thread

Brass

Scan for more
dimensions

C	References
G1/4	0135 06 13
G1/4	0135 09 13
G1/2	0135 06 21
G1/2	0135 09 21
G3/4	0135 10 27

This product is designed to distribute in several directions.

TREATED ALUMINIUM VERSIONS

3311

Manifold, Female BSPP and Metric Thread

C2



Treated aluminium

C1

Scan for more
dimensions

C1	C2	References
G1/4	G1/8	3311 10 13 02
	G1/8	3311 10 13 03
	G1/8	3311 10 13 04
	G1/8	3311 10 13 05
	G1/8	3311 10 13 06
G3/8	G1/4	3311 13 17 02
	G1/4	3311 13 17 03
	G1/4	3311 13 17 04
	G1/4	3311 13 17 05
	G1/4	3311 13 17 06

3312

Cross Manifold, Female BSPP and Metric Thread



Treated aluminium

Scan for more
dimensions

C	References
G1/8	3312 00 10
G1/4	3312 00 13
G3/8	3312 00 17
G1/2	3312 00 21

3313

Double Manifold, Female BSPP Thread



Treated aluminium

C2

C1

Scan for more
dimensions

C1	C2	References
G1/4	G1/8	3313 10 13 02
	G1/8	3313 10 13 03
	G1/8	3313 10 13 04
	G1/8	3313 10 13 05
	G1/4	3313 13 17 02
G3/8	G1/4	3313 13 17 03
	G1/4	3313 13 17 04
	G1/4	3313 13 17 05
G1/2	G1/4	3313 13 21 03
	G1/4	3313 13 21 04
	G1/4	3313 13 21 05

3310

In-Line Manifold

Treated aluminium, NBR

Scan for more
dimensions


ØD	C	Number of Outlets	References
4	G1/4	8	3310 04 13
6	G1/4	8	3310 06 13
8	G3/8	6	3310 08 17
10	G1/2	6	3310 10 21
12	G1/2	6	3310 12 21

Parker offers a range of accessories to facilitate installation and ensure safe use of Legris and Rectus products.

Push-in fittings accessories

Installation guide

Safety clip

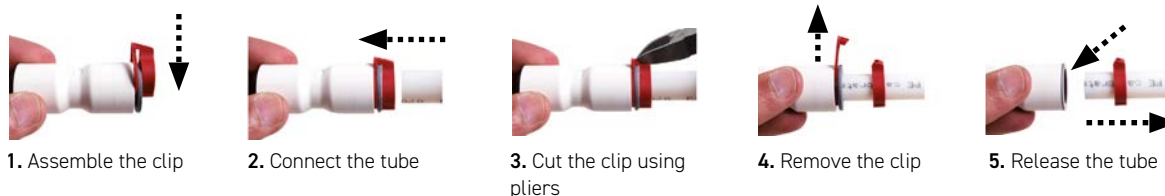

Coloured Release Button Covers

The release-button covers in different colours can be fitted onto the push buttons of LF 3000® and LIQUIfit® fittings.

Removable, they are available in 5 colours and allow you to use a tracking code on the circuits.



3110

Coloured Release Button Covers



Scan for more
dimensions



ØD					
4	3110 04 00	3110 04 02	3110 04 03	3110 04 04	3110 04 05
6	3110 06 00	3110 06 02	3110 06 03	3110 06 04	3110 06 05
8	3110 08 00	3110 08 02	3110 08 03	3110 08 04	3110 08 05
10	3110 10 00	3110 10 02	3110 10 03	3110 10 04	3110 10 05

3130

Tamper-Proof Safety Clip

Technical polymer



Scan for more
dimensions



ØD	References
6	3130 06 03
8	3130 08 03
10	3130 10 03
12	3130 12 03
14	3130 14 03
16	3130 16 03
1/4	3130 56 03

3000 70

Disconnection Tool

Treated steel



Scan for more
dimensions



Reference
3000 70 00

For disconnecting LF 3000® tube-to-fitting connections.
This tool can be used with tubing of outside diameters 4, 5, 6, 8, 10, 12 and 14 mm.

Installation guide

In the event of difficult access, it is recommended to use this dismantling tool.



COUPLERS ACCESSORIES

SK

Dust Protection for coupling and plug



Thermo Flex or Euro Flex

Reference	Matériaux	Couleur
SK12S	Thermo Flex	Bleu
SK16S	Euro Flex	Rouge
SK23S	Thermo Flex	Bleu
SK27S	Thermo Flex	Bleu

Flame resistance: UL-V0
Temperature range: -25°C to 120°C

FA

Swivel Joint



Nickel-plated steel

A	References
G1/4 i. x G1/4 o.	FA13A13ISPN
G3/8 i. x G3/8 o.	FA17A17ISPN

TUBING AND HOSE ACCESSORIES

3000 71 00

Tube Cutter



Technical polymer

References
3000 71 00
3000 71 00 05

This tool is designed to give a clean cut at right angles to the tube axis for all resilient polymer tubing (polyamide, polyurethane, FEP, polyethylene, etc.) from 4 mm to 16 mm diameter inclusive.
Replacement blades: part number 3000 71 00 05.
A spring maintains the cutter in the closed position.

3000 71 11

Tube Cutter



Treated steel

References
3000 71 11
3000 71 11 05

Replacement blades: part number 3000 71 11 05

6000 71 00

Stripping Tool for Anti-Spark Tubing




Technical polymer, stainless steel

Reference
6000 71 00

PARKER tool 611050HV

Sleeve assembly tool for self fastening hoses



0127

Brass Tube Support for Polymer Tubing



Brass

Scan for more dimensions



ØD1	ØD2	References
4	2	0127 04 00
	2.5	0127 04 25
	2.7	0127 04 27
5	3	0127 05 03
	3.3	0127 05 00
6	4	0127 06 00
8	5.5	0127 08 55
	6	0127 08 00
10	7	0127 10 07
	7.5	0127 10 75
	8	0127 10 00
12	8	0127 12 08
	9	0127 12 09
	10	0127 12 00
14	11	0127 14 11
	12	0127 14 00
15	12	0127 15 12
16	13	0127 16 13
18	14	0127 18 14
22	16	0127 22 16

At high temperatures and pressures, the use of a lining ensures good adhesion by preventing the tube from shrinking.

Clip Strips

The clips enable the tubes to be fixed with minimal space requirements.



1827

Stainless Steel Tube Support for Fluoropolymer Tubing



Stainless steel 316L

Scan for more dimensions



ØD	C	References
6	4	1827 06 00
8	6	1827 08 00
10	8	1827 10 00
12	9	1827 12 09
	10	1827 12 00
16	13	1827 16 13
	14	1827 16 00

This lining must be used with the fluoropolymer tube at all temperatures and pressures compatible with the connector/tube assembly.

0697

Clip for Braided Tubing



Treated steel

Scan for more dimensions



ØD	References
6-11	0697 00 01
10-16	0697 00 02
12-22	0697 00 03
16-27	0697 00 04
20-32	0697 00 05

CLIP

Clip Strip for Tubing and Fittings

Technical polymer



Scan for more dimensions



ØD	Number of Outlets	References
4	8	CLIP 04 00
6	8	CLIP 06 00
8	7	CLIP 08 00
10	6	CLIP 10 00
12	5	CLIP 12 00
14	4	CLIP 14 00

Delivered in boxes of 10 strips of the same diameter (with 9.5 mm long self-tapping screws). These clips can be used with both metric tubing and equivalent inch tubing.

0136

Tailpiece Adaptor for Flexible Tubing,
Male BSPT Thread



Brass



Int. D	ØD1	ØD2	C	References
6	4	4.3	R1/8	0136 06 10
	4	4.3	R1/4	0136 06 13
	4	4.3	R3/8	0136 06 17
8	6	6.4	R1/8	0136 08 10
	6	6.4	R1/4	0136 08 13
	6	6.4	R3/8	0136 08 17
10	8	8.4	R1/4	0136 10 13
	8	8.4	R3/8	0136 10 17
	8	8.4	R1/2	0136 10 21
12	10	10.7	R1/4	0136 12 13
	10	10.7	R3/8	0136 12 17
	10	10.7	R1/2	0136 12 21
14	12	12.7	R1/4	0136 14 13
	12	12.7	R3/8	0136 14 17
	12	12.7	R1/2	0136 14 21
16	12	12.7	R3/4	0136 14 27
	13	13.7	R3/8	0136 16 17
	13	13.7	R1/2	0136 16 21
16	13	13.7	R3/4	0136 16 27

0934

Tailpiece Adaptor for Polymer Tubing,
Male BSPT Thread



Nickel-plated brass



Int. D	C	References
6	R1/8	0934 06 10
	R1/4	0934 06 13
7	R1/8	0934 07 10
	R1/4	0934 07 13
8	R1/8	0934 08 10
	R1/4	0934 08 13
9	R1/4	0934 09 13
	R3/8	0934 09 17
10	R1/2	0934 09 21
	R1/8	0934 10 10
10	R1/4	0934 10 13
	R3/8	0934 10 17
12	R1/2	0934 10 21
	R1/4	0934 12 13
12	R3/8	0934 12 17
	R1/2	0934 12 21
14	R3/8	0934 14 17
	R1/2	0934 14 21
16	R3/8	0934 16 17
	R1/2	0934 16 21
16	R3/4	0934 16 27
17	R1/2	0934 17 21
	R3/8	0934 18 17
18	R1/2	0934 18 21
	R3/4	0934 18 27
20	R1/2	0934 20 21

0935

Tailpiece Adaptor for Polymer Tubing,
Male BSPP Thread



Nickel-plated brass



Int. D	C	References
6	G1/8	0935 06 10
8	G1/4	0935 08 13

0694

Push-In Fitting with Protection Spring,
Male BSPP Thread



Nickel-plated brass, NBR



ØD	C	References
8	G1/4	0694 08 13
10	G1/4	0694 10 13
12	G3/8	0694 12 17

0695

Push-In Fitting with Protection Spring,
Male BSPT Thread



Nickel-plated brass, NBR



ØD	C	References
8	R1/4	0695 08 13
10	R1/4	0695 10 13
12	R3/8	0695 12 17

GT

Hose Tail Barb



Brass

Scan for more
dimensions




Int. D	C	References
3	M5	GT05/03
4	M5	GT05/04
	M6	GT06/04
6	G1/2*	GT21/06
4	G1/8*	GT10/04
6	G1/8*	GT10/06
8	G1/8*	GT10/08
9	G1/8*	GT10/09
4	G1/4*	GT13/04
6	G1/4*	GT13/06
8	G1/4*	GT13/08
9	G1/4*	GT13/09
10	G1/4*	GT13/10
3	G1/4*	GT13/13
6	G3/8*	GT17/06
8	G3/8*	GT17/08
9	G3/8*	GT17/09
10	G3/8*	GT17/10
13	G3/8*	GT17/13
9	G1/2*	GT21/09
10	G1/2	GT21/10
13	G1/2*	GT21/13
16	G1/2	GT21/16
19	G1/2	GT21/19
13	G3/4*	GT26/13
16	G3/4*	GT26/16
19	G3/4*	GT26/19
25	G1*	GT33/25

Male thread (* 45° internal cone)

GI

Hose Tail Barb



Brass

Scan for more
dimensions



Int. D	C	References
6	G1/8	GI10/06
6	G1/4	GI13/06
8	G1/4	GI13/08
9	G1/4	GI13/09
13	G1/4	GI13/13
8	G3/8	GI17/08
9	G3/8	GI17/09
13	G3/8	GI17/13
8	G1/2	GI21/08
9	G1/2	GI21/09
13	G1/2	GI21/13

Filetage femelle

DS

Hose Repairer



Brass

Scan for more
dimensions




Int. D	References
4	DS04/04P**
6	DS06/06*
8	DS08/08*
9	DS09/09*
13	DS13/13

* DIN EN 560

** for Hard Hoses

GT..R

Hose Tail Barb



Stainless steel

Scan for more
dimensions



Int. D	C	References
6	G1/8*	GT10/06R
9	G1/4*	GT13/09R
	G3/8*	GT17/09R

Male thread (* 45° internal cone)

DV

Swivelling Spring Guard



Brass

Scan for more
dimensions



ØD	C	References
3.1 x 4.7	R1/8	DV10/05
4.8 x 6.3	R1/4	DV13/06
6.3 x 7.9	R1/4	DV13/08
7.9 x 9.5	R1/4	DV13/10
9.5 x 11.8	R3/8	DV17/12
12.7 x 15.8	R1/2	DV21/16

SV

Fixed Spring Guard



Brass

Scan for more
dimensions



ØD	C	References
4 x 6	G1/8	SV10/06
6 x 8	G1/8	SV10/08
4 x 6	G1/4	SV13/06
6 x 8	G1/4	SV13/08
8 x 10	G1/4	SV13/10
9 x 12	G1/4	SV13/12

KN

Spring Guard completely with Tube Nut



Brass

Scan for more
dimensions



ØD	C	References
4 x 6	M10x1	KN06
6 x 8	M12x1	KN08

0123

Tailpiece Adaptor for Rubber Hose,
Male BSPT Thread



Brass



Int.D	Ext.D	C	References
4	6	R1/8	0123 04 10
6	8	R1/8	0123 06 10
	9	R1/8	0123 07 10
7	9	R1/4	0123 07 13
	9	R3/8	0123 07 17
	12.2	R1/8	0123 10 10
10	12.2	R1/4	0123 10 13
	12.2	R3/8	0123 10 17
12	14	R3/8	0123 12 17
	15	R1/4	0123 13 13
13	15	R3/8	0123 13 17
	15	R1/2	0123 13 21
	18.5	R3/8	0123 16 17
16	18.5	R1/2	0123 16 21
	18.5	R3/4	0123 16 27
	21.5	R3/8	0123 19 17
19	21.5	R1/2	0123 19 21
	21.5	R3/4	0123 19 27
25	26.7	R3/4	0123 25 27
	27	R1	0123 25 34
32	34.5	R1	0123 32 34

0191

Tailpiece Adaptor for Rubber Hose,
Male BSPP Thread



Nickel-plated brass



Int.D	Ext.D	C	References
4	6	G1/4	0191 04 13
7	9	G1/4	0191 07 13
	9	G1/2	0191 07 21
10	12.2	G1/4	0191 10 13
	12.2	G1/2	0191 10 21
13	15.2	G1/4	0191 13 13
	15.2	G1/2	0191 13 21
16	18.5	G1/2	0191 16 21

0931

Tailpiece Adaptor for Rubber Hose,
Male BSPP Thread



Nickel-plated brass



Int.D	Ext.D	C	References
6	7	G1/8	0931 06 10
	7	G1/4	0931 06 13
	8	G1/8	0931 07 10
7	8	G1/4	0931 07 13
	8	G3/8	0931 07 17
	9	G1/8	0931 08 10
8	9	G1/4	0931 08 13
	9	G3/8	0931 08 17
	12	G1/4	0931 10 13
10	12	G3/8	0931 10 17
	12	G1/2	0931 10 21
15	17	G3/8	0931 15 17
	17	G1/2	0931 15 21
18	20	G1/2	0931 18 21

1823

Tailpipe Adaptor for Rubber Hose,
Male BSPT Thread



Stainless steel 316L



Int.D	Ext.D	C	References
7	9	R1/8	1823 07 10
	9	R1/4	1823 07 13
10	12.2	R1/4	1823 10 13
	12.2	R3/8	1823 10 17
13	15	R3/8	1823 13 17
16	18.5	R1/2	1823 16 21

1823

Tailpipe Adaptor for Rubber Hose,
Male NPT Thread



Stainless steel 316L



Int.D	Ext.D	C	References
1/4	8.3	NPT1/8	1823 56 11
	8.3	NPT1/4	1823 56 14
3/8	11.7	NPT1/4	1823 60 14
	11.7	NPT3/8	1823 60 18

SELF-FASTENING HOSES ACCESSORIES

0132

Self-Fastening Barb Connector for
Brass Compression Fitting



Brass

Scan for more
dimensions



ØD	Int.D	Ext.D	References
6	6.3	13	0132 06 56
8	6.3	13	0132 08 56
10	6.3	13	0132 10 56
	9.5	16	0132 10 60
14	9.5	16	0132 14 60
	12.7	19	0132 14 62
18	12.7	19	0132 18 62
	15.9	23	0132 18 66
22	19.1	27	0132 22 69

Collar in technical polymer
D: nut Ø

0133..39

Self-Fastening Barb Connector with
Bi-Material Seal, Male BSPP Thread

Brass, zinc plated steel with NBR seal



Scan for more
dimensions



Int.D	Ext.D	C	References
6.3	13	G1/8	0133 56 10 39
6.3	13	G1/4	0133 56 13 39
9.5	16	G1/4	0133 60 13 39
9.5	16	G3/8	0133 60 17 39
12.7	19	G3/8	0133 62 17 39
12.7	19	G1/2	0133 62 21 39
15.9	23	G1/2	0133 66 21 39
15.9	23	G3/4	0133 66 27 39
19.1	27	G3/4	0133 69 27 39

Threaded connection with bi-material seal 0139 and an
technical polymer collar.

0134

Self-Fastening Barb Connector, Male
BSPT Thread



Brass

Scan for more
dimensions



Int.D	Ext.D	C	References
6.3	13	R1/8	0134 56 10
6.3	13	R1/4	0134 56 13
9.5	16	R1/4	0134 60 13
9.5	16	R3/8	0134 60 17
12.7	19	R3/8	0134 62 17
12.7	19	R1/2	0134 62 21
15.9	23	R1/2	0134 66 21
15.9	23	R3/4	0134 66 27
19.1	27	R3/4	0134 69 27

Collar in technical polymer



Related products

Compression fittings
Stud Fitting, Female BSPP Thread



ex. 0114

page 106

VALVES ACCESSORIES

0627

Automatic Vent Pressure Gauge
Valve, Female BSPP Thread



Nickel-plated brass, NBR

Scan for more
dimensions



C	References
G1/4	0627 00 13

0630

Pressure Relief Valve, Male BSPP
Thread



Brass

Scan for more
dimensions



C	References
G1/4	0630 06 13

This exhaust valve is supplied uncalibrated, but it can be
adjusted by inserting metal washers between the hexagon
(F).

Maximum operating pressure: 10 bar
Setting range from 1 to 10 bar (not below)

0137 Bonded Seal

Zinc-plated steel with NBR seal



Scan for more
dimensions



C	References
M12	0137 12 00
M14	0137 14 00
M16	0137 16 00
M18	0137 18 00
M20	0137 20 00
M22	0137 22 00
M24	0137 24 00
G1/8	0137 10 00
G1/4	0137 13 00
G3/8	0137 17 00
G1/2	0137 21 00
G3/4	0137 27 00
G1	0137 33 00
G1 1/4	0137 42 00
G1 1/2	0137 48 00

Note: when using these seals, the counterbore must be machined to a diameter equal to the seal's outside diameter, increased by 0.3 to 0.5 mm. However, this counterbore is not essential. The surface finish of the bearing face must not exceed a total roughness of 12 µm.

0602 Captive Sealing Washer

Technical polymer



Scan for more
dimensions



C	References
M5x0.8	0602 29 93 15
G1/8	0602 23 10 20
G1/4	0602 23 11 20
G3/8	0602 23 12 20
G1/2	0602 23 13 20
G3/4	0602 27 32 20
G1	0602 30 60 20

Maximum allowable pressure: 20 bar

0139 Bi-Material Captive Sealing Washer

Zinc-plated steel with NBR seal



Scan for more
dimensions



C	References
G1/8	0139 10 00
G1/4	0139 13 00
G3/8	0139 17 00
G1/2	0139 21 00
G3/4	0139 27 00
G1	0139 34 00

Maximum allowable pressure: 250 bar

AD Aluminium seal

Aluminium



Scan for more
dimensions



C	References
G1/8	AD10
G1/4	AD13
G3/8	AD17
G1/2	AD21
G3/4	AD26

0138 Copper gasket for threaded connection

Copper



Scan for more
dimensions



C	References
M6	0138 06 00
M8	0138 08 00
G1/8	0138 10 00
M12	0138 12 00
M14	0138 14 00
M16	0138 16 00
M18	0138 18 00
M20	0138 20 00
M22	0138 22 00
M24	0138 24 00
M26	0138 26 00
M30	0138 30 00
M36	0138 36 00
G1/4	0138 13 00
G3/8	0138 17 00
G1/2	0138 21 00
G3/4	0138 27 00
G1	0138 33 00
G1 1/4	0138 42 00

DIN 7603
ISO 65061

0605 Fluoropolymer tape

Technical polymer, FKM



Scan for more
dimensions



Reference
0605 12 12

Operating temperature: from -250°C to +260°C.
Chemically inert and resistant to gases, acids, solvents, hydrocarbons, oils, alkaline vapors, etc.
Water-repellent, non-toxic, self-lubricating.
Complies with CFR21. Suitable for use on all materials.
Replaces jointing paste, white lead and hemp, under conditions of absolute cleanliness.
Supplied on a spool, in an individual box:
length = 12 m, width = 12.7 mm, thickness = 0.08 mm



Legris polymer blowguns ensure effective cleaning, drying and cooling using compressed air. The Premium range, available in three variants, is designed for demanding industrial environments and offers a high degree of modularity.

PREMIUM BLOWGUNS




Technical specifications

-  **Fluids:** compressed air
-  **Operating pressure:** 0 to 10 bar
-  **Operating temperature:** -20 to +80°C
-  **Regulations:** RoHS, REACH, PED, OSHA

Performance depends on the fluid, material and tube used.

Components materials

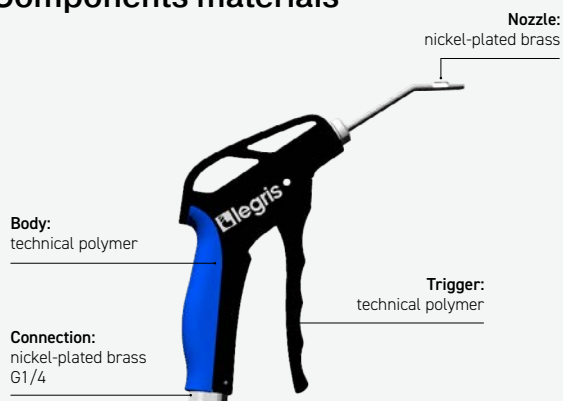

Benefits

- Designed in **reinforced technical polymer** for improved **mechanical strength**, proven for severe and repetitive use.
- **OSHA certification** to meet pressure and noise safety requirements.
- **Ergonomic design** of the control trigger for **smooth and precise flow control**.
- **Several nozzles available** for flexible configurations.

ENERGY-SAVING VERSION

The energy-saving blowguns offer all the advantages of Premium blowguns, plus a built-in flow reducer to limit air consumption.

Components materials




SAFETY VERSION

Benefits


The Safety blowguns offer all the qualities of the Premium models, with the addition of specific features:

- **Dynamic safety:** the fixed nozzle allows for a rapid drop in pressure in the event of direct contact with an obstacle, ensuring user safety. Conversely, as soon as the nozzle is removed from the obstruction, the pressure automatically rises again.
- **OSHA certification** to meet pressure and noise safety requirements, as well as a **SUVA-certified** model equipped with a pressure reducer to limit the outlet pressure, as required by the standard.

Components materials

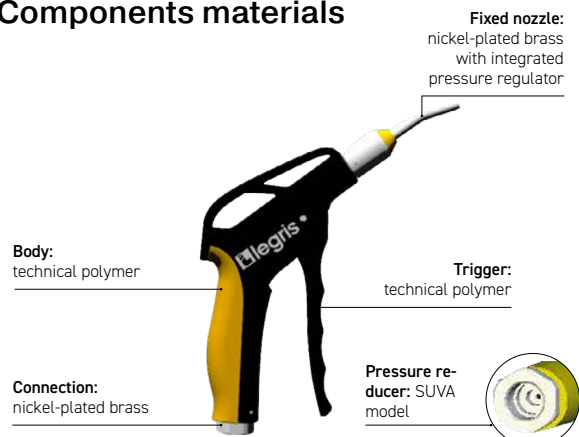

How the safety nozzle works

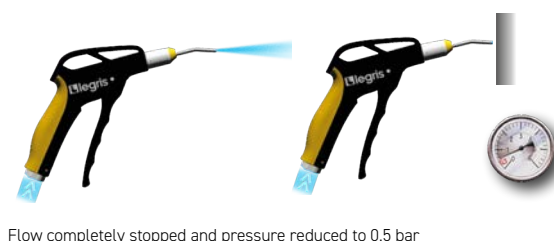


STANDARD VERSION

Benefits

The AK13 range, ready to use, offers a reliable and economical solution for standard environments:

- Blowgun pre-fitted with a **fixed aluminium nozzle** for standard use.
- **Lightweight model** (80g) to reduce operator fatigue

Components materials

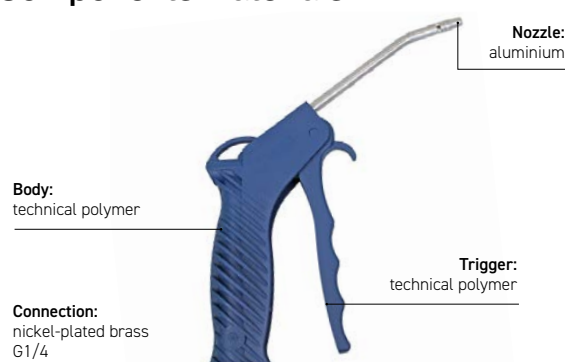

Related products

Rectus Plugs

page 118



DRV pressure reducer

page 86



0656

Progressive Control Blowgun with
Short Angled Nozzle, Female BSPP
Thread



Technical polymer,
Nickel-plated brass, NBR


Scan for more
dimensions



C	References
G1/4	0656 66 13

Nozzle: Nickel-plated brass

Progressive flow depending on the trigger position



Pressure:
6 bar



556 Nl/min
98 dBA

Flow produced with
nozzle 0690 06 01



OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0652

Progressive Control Blowgun with
Interchangeable Nozzle, Female BSPP
Thread



Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



C	C1	References
G1/4	M12x1.25	0652 66 13

Flow characteristics depend on the type of nozzle used;
supplied without nozzle.



Depending on the type of nozzle



dBA depending on the type of nozzle



OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0651

Progressive Control Blowgun with
Standard Nozzle, Female BSPP
Thread



Technical polymer,
Nickel-plated brass, NBR


Scan for more
dimensions



DN	C	References
2.5	G1/4	0651 66 13

Nozzle: Nickel-plated brass

Progressive flow depending on the trigger position



Pressure:
6 bar



350 Nl/min
99 dBA

Flow produced with
nozzle 0690 01 00



OSHA 1910.95 (b)
2003/10/EC directive:
Requirement to use ear protection
if exposure > 8 hours

0631..05

Blowgun Kit with Short Angled Noz-
zle, Male BSPT Thread



Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



C	References
R1/4	0631 00 05

The flow characteristics, noise level, and standards
compliance are identical to those of our blowguns
(0656 66 13).

ENERGY SAVING VERSIONS

0653

Energy Saving Blowgun with Inter-
changeable Nozzle, Female BSPP
Thread



Technical polymer,
Nickel-plated brass, NBR


Scan for more
dimensions



C	C1	References
G1/4	M12x1.25	0653 66 13

Flow characteristics depend on the type of nozzle used;
supplied without nozzle. An energy savings calculator is
available.

Progressive flow depending on the trigger position



Pressure:
6 bar



173 Nl/min
86 dBA

Whatever the
type of nozzle
Noise level measured
without nozzle



OSHA 1910.95 (b)
2003/10/EC directive:
No ear defenders necessary

0631..23

Energy Saving Blowgun Kit with-
Angled Nozzle, Male BSPT Thread



Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



C	References
R1/4	0631 00 23

The flow characteristics, noise level, and standards
compliance are identical to those of our blowguns
(0653 66 13).

PU tube outside diameter: 6 mm.

SAFETY VERSIONS

0654
Safety Blowgun, Female BSPP Thread




Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



DN	C	References
3	G1/4	0654 00 13

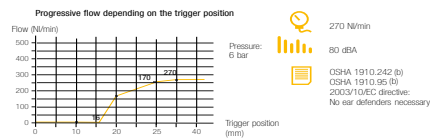

0654
SUVA Safety Blowgun, Female BSPP
Thread




Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



DN	C	References
3	G1/4	0654 01 13

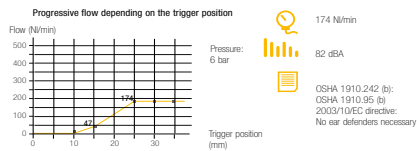

0631..01
Safety Blowgun Kit, Male BSPT
Thread



Technical polymer,
Nickel-plated brass, NBR

Scan for more
dimensions



C	References
R1/4	0631 00 01

The flow characteristics, noise level, and compliance with standards are identical to those of our blowguns (0654 00 13).

0690 01 Standard Nozzle

Nickel-plated brass



DN	C	References
2.5	M12x1.25	0690 01 00



359 N/min 99 dBA 23°

- Versatile use
- Powerful, progressive directional air jet

OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 02 Safety Nozzle

Nickel-plated brass



DN	C	References
2.5	M12x1.25	0690 02 00



353 N/min 98 dBA 26°

- Fluidised Powders
- Air screen effect
- Safety: avoids the nozzle becoming completely blocked


OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 03 Straight Nozzle (Long)

Nickel-plated brass, NBR



DN	C	References
2.5	M12x1.25	0690 03 00



516 N/min 102 dBA 21°

- Restricted access
- Progressive and powerful air jet


OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 04 Safety Straight Nozzle (Short)

Nickel-plated brass, NBR



DN	C	References
2.5	M12x1.25	0690 04 00



642 N/min 98 dBA 21°

- Restricted access
- Air screen effect and directional jet
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 05 Angled Nozzle (Long)

Nickel-plated brass, NBR



DN	C	References
2.5	M12x1.25	0690 05 00



512 N/min 102 dBA 21°

- Restricted or distant access
- Progressive and powerful air jet
- 360° rotation

OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 06 Safety Angled Nozzle (Short)

Nickel-plated brass, NBR



DN	C	References
2.5	M12x1.25	0690 06 00



601 N/min 98 dBA 21°

- Restricted access
- Air screen effect and 360° directional jet
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 07 Nozzle with LF 3000® Push-In Connection

Nickel-plated brass, NBR



ØD	C	References
4	M12x1.25	0690 07 00



392 N/min 96 dBA 21°

- Restricted access
- Powerful and progressive air jet

OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 08 COANDA Nozzle

Nickel-plated brass



C	References
M12x1.25	0690 08 00

Nozzle not compatible with Rectus blowguns



253 N/min 79 dBA 20°

- Directional air jet
- Very quiet, energy-saving
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
No ear defenders necessary

0690 09 Air Screen Safety Nozzle

Nickel-plated brass



DN	C	References
2	M12x1.25	0690 09 00



683 N/min 94 dBA 24°

- High flow for blowing large surfaces
- Air screen and deflector to avoid particles being blown back
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b) / OSHA 1910.95 (b) / 2003/10/CE directive
Requirement to use ear protection if exposure > 8 hours

0690 10 Safety Booster Nozzle

Nickel-plated brass



DN	C	References
2.5	M12x1.25	0690 10 00



372 N/min 102 dBA 28°

- High flow for blowing large surfaces
- Air screen effect
- Safety: avoids the nozzle becoming completely blocked

OSHA 1910.242 (b) / 2003/10/CE directive
Requires ear defenders to be used at all times

AK13

Blowgun with aluminium extension
tube fixed nozzle




Technical polymer, NBR
Aluminium nozzle

Scan for more
dimensions



A	References
G1/4	AK13

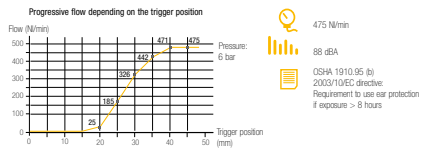

AK26SF

Blowgun with aluminium extension
tube fixed nozzle



Technical polymer, NBR
Aluminium nozzle

Scan for more
dimensions



A	References
Plug Series 26	AK26SF

0631..09

Blowgun Kit, Male BSPT Thread



Technical polymer, NBR

Scan for more
dimensions



C	References
R1/4	0631 00 09

The flow characteristics, noise level, and standards
compliance are identical to those of our blowguns (AK13).
PU Tubing

AK13SET

AK13-Set in Display Box



A	References
Female G1/4	AK13SET

Display box with 10x AK13



Legris water pistols are designed to withstand demanding mechanical conditions (risk of crushing, heavy impacts, corrosive fluids).

Technical specifications

-  **Fluids:** industrial water, oils and lubricants
-  **Operating pressure:** 0 to 20 bar
-  **Operating temperature:** -20 to +100°C
-  **Regulations:** RoHS, REACH, PED

Performance depends on the fluid, material and tube used.

Components materials

Body:
Zamak-treated


Seals: NBR

Handle: polymer-coated

Connection:
nickel-plated brass
profile compatible
with Rectus Midi
series couplers

Nozzle:
nickel-plated brass

Lever:
Zamak-treated



Benefits

- **Excellent service life**, the spray gun is made of Zamak, which has been specially treated for industrial water transfer.
- **Control of fluid consumption** thanks to an adjustable nozzle that allows precise flow rate adjustment, thereby optimising the power and shape of the jet.
- **Ergonomic**, the handle is coated with technical polymer to improve user comfort.
- **Workshop blowgun versions** designed in nickel-plated stamped brass to resist corrosion.



Related products

Midi and Maxi Series Couplers



2299

Water Pistol

Zamak, Nickel-plated brass, NBR



Scan for more
dimensions



DN	References
12	2299 12 01

This spray gun allows independent adjustment of:
the jet force (flow rate) via its handle, up to 1440 Nl/min (air)
and up to 16.2 Nl/min (water)
the jet pattern (up to a fine mist) via the tip of its lance
Gun compatible with Midi series couplers.

2294

Plug without valve, Male BSPP Thread



Nickel-plated brass

DN	C	References
12	G3/8	2294 12 17
	G1/2	2294 12 21
	G3/4	2294 12 27
	G1	2294 12 34
19	G3/4	2294 18 27
	G1	2294 18 34

2296

Plug without valve, Female BSPP Thread



Nickel-plated brass

DN	C	References
12	G1/2	2296 12 21
	G3/4	2296 12 27
	G1	2296 12 34

2297

Coupler without valve, with Barb Connection for Hose



Nickel-plated brass, NBR

DN	ØD	ØD1	References
12	12	13.5	2297 12 12
	15	16.5	2297 12 15
	19	20.5	2297 12 19
	18	20.7	2297 18 20

2272

Coupler without valve, Female BSPP Thread



Nickel-plated brass, NBR

DN	C	References
12	G1/2	2272 12 21
	G3/4	2272 12 27
	G1	2272 12 34

0172

Coupler with valve, Female BSPP Thread



Nickel-plated brass, NBR

DN	C	References
5	G1/4	0172 05 13

0622

Button-Operated Blowgun, Female BSPP Thread

Nickel-plated brass, Steel zingué, NBR



Scan for more
dimensions



DN	C	References
2	G1/4	0622 26 73

This workshop blowgun is equipped with a calibrated nozzle made of treated steel.

0623

Lever-Operated Blowgun, Female BSPP Thread

Nickel-plated brass, Steel zingué, NBR



Scan for more
dimensions



DN	C	References
2	G1/4	0623 10 35

This workshop blowgun is equipped with a calibrated nozzle made of treated steel.

0101	p. 105	0436	p. 231	0907	p. 300	1822	p. 114	3181/3281	p. 14
0101..39	p. 105	0437	p. 231	0908	p. 299	1823	p. 315	3182	p. 20
0102	p. 106	0438	p. 231	0909	p. 299	1824	p. 114	3183	p. 20
0103	p. 106	0439	p. 231	0910	p. 298	1827	p. 114, 312	3184	p. 20
0104	p. 107	0446	p. 228	0911	p. 298	1843	p. 301	3188	p. 20
0105	p. 105	0448	p. 229	0912	p. 298	1844	p. 301	3192	p. 16
0106	p. 107	0449	p. 230	0913	p. 298	1845	p. 301	3193	p. 17
0108	p. 107	0452	p. 229	0914	p. 298	1855	p. 301	3198/3298	p. 16
0109	p. 106	0461	p. 230	0915	p. 298	1861	p. 302	3199/3299	p. 16
0110	p. 108	0462	p. 230	0916	p. 298	1862	p. 301	3218	p. 22
0110..40	p. 108	0465	p. 241	0917	p. 298	1863	p. 302	3300	p. 24
0110..60	p. 108	0469	p. 230	0919	p. 306	1864	p. 302	3304	p. 19
0111	p. 108	0471	p. 228	0919..1	p. 306	1866	p. 114	3306	p. 19
0112	p. 111	0472	p. 228	0920	p. 300	1867	p. 302	3310	p. 309
0114	p. 106	0482	p. 228	0921	p. 298	1870	p. 301	3311	p. 309
0116	p. 107	0483	p. 229	0927	p. 299	1871	p. 301	3312	p. 309
0117	p. 296	0489	p. 230	0928	p. 299	1872	p. 302	3313	p. 309
0118..39	p. 107	0490	p. 240	0929..1	p. 297	1873	p. 302	3320	p. 25
0119	p. 107	0491	p. 240	0931	p. 315	2003U	p. 262	3321	p. 25
0119..39	p. 107	0491..64	p. 240	0932	p. 299	2003U..R	p. 263	3329	p. 25
0120	p. 110	0492	p. 240	0933	p. 300	2005P	p. 270	3379	p. 25
0121	p. 297	0492..64	p. 240	0934	p. 313	2005U	p. 262	3381	p. 25
0122	p. 110	0496	p. 240	0935	p. 313	2005U..R	p. 263	3391	p. 23
0123	p. 315	0497	p. 240	0936	p. 306	2010P	p. 270	3524	p. 23
0124	p. 108	0501	p. 247	1005T	p. 279	2010U	p. 262	3527	p. 23
0124..40	p. 108	0502	p. 247	1010P..M	p. 271	2010U..R	p. 263	3528	p. 23
0125	p. 109	0510	p. 247	1010T..A	p. 281	2272	p. 325	3529	p. 23
0126	p. 109	0531	p. 247	1015Y..F	p. 277	2294	p. 325	3538	p. 22
0127	p. 111, 312	0532	p. 247	1025P	p. 270	2296	p. 325	3539	p. 22
0128..39	p. 110	0562	p. 247	1025P..V	p. 273	2297	p. 325	3549	p. 22
0132	p. 316	0563	p. 247	1025T	p. 279	2299	p. 325	3600	p. 44
0133..39	p. 316	0591	p. 247	1025U	p. 262	3000 70	p. 310	3601	p. 31
0134	p. 316	0602	p. 317	1025U..G	p. 263	3000 71 00	p. 311	3602	p. 32
0135	p. 309	0605	p. 317	1025U..K	p. 267	3000 71 11	p. 311	3603	p. 32
0136	p. 313	0622	p. 325	1025U..R	p. 263	3018	p. 22	3604	p. 32
0137	p. 317	0623	p. 325	1025U..V	p. 267	3091	p. 23	3606	p. 32
0138	p. 39, 317	0627	p. 316	1025V	p. 287	3100	p. 44	3608	p. 32
0139	p. 317	0630	p. 316	1025V..C	p. 287	3101	p. 14	3609	p. 31
0143	p. 295	0631..01	p. 321	1030Y..F	p. 277	3102	p. 18	3614	p. 31
0144	p. 295	0631..05	p. 320	1040H	p. 289	3103	p. 17	3616	p. 33
0145	p. 295	0631..09	p. 323	1050P..M	p. 271	3104/3204	p. 18	3618	p. 31
0151..39	p. 110	0631..23	p. 320	1050T	p. 279	3106/3206	p. 18	3620	p. 33
0152	p. 295	0651	p. 320	1050T..P	p. 281	3107	p. 18	3621	p. 33
0155	p. 296	0652	p. 320	1050V	p. 287	3108	p. 16	3622	p. 33
0158	p. 295	0653	p. 320	1075Y..F	p. 277	3109	p. 15	3626	p. 33
0163	p. 296	0654	p. 321	1080H	p. 289	3110	p. 310	3629	p. 32
0164	p. 296	0656	p. 320	1096Y..F	p. 277	3113	p. 15	3631	p. 33
0165	p. 110	0669	p. 91	1098Y..F	p. 277	3114	p. 14	3636	p. 33
0166	p. 109	0670	p. 96	1100H	p. 289	3116	p. 21	3639	p. 33
0167	p. 296	0671	p. 96	1100P	p. 270	3118	p. 22	3666	p. 33
0168	p. 296	0672	p. 96	1100P..R	p. 275	3119	p. 22	3667	p. 33
0168..39	p. 111	0673	p. 96	1100P..V	p. 273	3120	p. 20	3668	p. 33
0169	p. 297	0674	p. 96	1100T	p. 279	3121	p. 19	3669	p. 32
0172	p. 325	0675	p. 96	1100T..P	p. 281	3122	p. 20	3675	p. 31
0178	p. 299	0676	p. 96	1100U ..R	p. 263	3124	p. 22	3681	p. 31
0191	p. 315	0677	p. 96	1100U	p. 262	3126	p. 21	3693	p. 32
0192	p. 300	0682	p. 96	1100U..A	p. 265	3129	p. 15	3698	p. 32
0199	p. 106	0683	p. 96	1100U..K	p. 267	3130	p. 310	3699	p. 31
0200	p. 305	0690 01	p. 322	1100U..V	p. 267	3131	p. 19	3800	p. 37, 44
0201	p. 305	0690 02	p. 322	1100Y	p. 277	3132	p. 17	3801	p. 35
0202	p. 305	0690 03	p. 322	1420U	p. 262	3133	p. 15	3802	p. 36
0205	p. 305	0690 04	p. 322	1470P	p. 284	3136	p. 21	3804	p. 36
0206	p. 306	0690 05	p. 322	1470U	p. 283	3139	p. 21	3805	p. 35
207ACBH	p. 296	0690 06	p. 322	1471P	p. 284	3140	p. 18	3806	p. 36
0209	p. 305	0690 07	p. 322	1471U	p. 283	3142	p. 20	3809	p. 35
209P	p. 297	0690 08	p. 322	1472P	p. 284	3144	p. 17	3816	p. 37
0210	p. 306	0690 09	p. 322	1472U	p. 283	3146	p. 21	3821	p. 37
0216	p. 307	0690 10	p. 322	1802	p. 114	3148	p. 17	3826	p. 37
0220	p. 109	0694	p. 313	1804	p. 114	3149	p. 22	3831	p. 37
0220..39	p. 109	0695	p. 313	1805	p. 113	3151	p. 21	3866	p. 37
0222	p. 306	0697	p. 312	1806	p. 114	3158	p. 17	3879	p. 36
0285	p. 307	0900	p. 300	1809	p. 113	3159	p. 23	3889	p. 36
0400	p. 228	0901	p. 300	1810	p. 114	3160	p. 23	3893	p. 36
0401	p. 228	0902	p. 300	1814	p. 113	3166/3266	p. 19	3899	p. 35
0402	p. 228	0903	p. 299	1816	p. 114	3168	p. 19	4020	p. 237
0411	p. 228	0904	p. 299	1817	p. 301	3169	p. 16	4021	p. 237
0414	p. 245	0905	p. 299	1820	p. 113	3175	p. 14	4022	p. 237
0432	p. 231	0906	p. 300	1821	p. 303	3180	p. 20	4023	p. 237

4024	p. 237	7170	p. 71	14KAAW	p. 128	21KBKS	p. 140, 166, 204	23KAIW	p. 145
4202/4204..20	p. 250	7180	p. 71	14KAIW	p. 128	21KBRP	p. 140	23KATF	p. 145
4202/4204..30	p. 250	7190	p. 71	14KATF	p. 128	21KBTE	p. 140, 204	23SFAK	p. 127, 145, 177, 188,
4212/4214..20	p. 250	7300	p. 85	14KEAK	p. 194	21KBTF	p. 141, 166, 205,	23SFAW	p. 127, 145, 177, 188,
4222/4224..20	p. 250	7630	p. 69	14KEAW	p. 194		205	23SFIW	p. 127, 145, 177, 188,
4298 00 02	p. 251	7631	p. 69	14KEIW	p. 194	21KBTS	p. 141, 166, 204		
4810	p. 233	7640	p. 68	14KETF	p. 194	21KDAW	p. 182		
4812	p. 233	7649	p. 68	18KAAK	p. 146	21KDIW	p. 182	23SFKO	p. 145, 188, 201
4832	p. 233	7660	p. 68	18KAAW	p. 146	21KDTF	p. 182	23SFTF	p. 127, 145, 177, 188,
4890	p. 59	7662	p. 68	18KAIW	p. 146	21KFAW	p. 141, 166		
4891	p. 59	7665	p. 68	18KATF	p. 146	21KFIM	p. 141	24KAAW	p. 127
4892	p. 59	7668	p. 67	18KPAW	p. 189	21KFIW	p. 141, 166	24KAIW	p. 127
4895	p. 59	7669	p. 68	18KPIW	p. 189	21KFKK	p. 141	24KATF	p. 127
4902	p. 233	7680	p. 70	18KPTF	p. 189	21KFKO	p. 141	24KPAW	p. 188
4991	p. 241	7770	p. 68	18SFAK	p. 146, 189	21KFKS	p. 141	24KPIW	p. 188
4992	p. 241	7771	p. 69	18SFAW	p. 146, 189	21KFTF	p. 141, 166	24KPTF	p. 188
6000 71 00	p. 267, 273, 311	7772	p. 68	18SFIW	p. 146, 189 146	21KLAW	p. 215	25KAAK	p. 148
6101	p. 39	7776	p. 69	18SFTF	p. 146, 189	21KLIW	p. 215	25KAAW	p. 148, 169
6105	p. 39	7800	p. 91	20KAAF	p. 135, 161	21KLKK	p. 215	25KAIW	p. 148, 169
6106	p. 39	7801	p. 91	20KAAM	p. 123, 135, 161,	21KLKO	p. 215	25KAKO	p. 148, 169
6114	p. 39	7802	p. 91	20KAAW	p. 123, 135, 161,	21KLKS	p. 215	25KATE	p. 148
6179	p. 39	7810	p. 71	20KAIM	p. 123, 135, 161,	21KLTF	p. 215	25KATF	p. 148, 169
6300	p. 44	7812	p. 71	20KAIW	p. 123, 135, 161,	21KLTS	p. 215	25KATS	p. 148
6300..24	p. 44	7818	p. 93	20KAKO	p. 123, 135, 161,	21KSAW	p. 182	25KBAK	p. 148
6300..26	p. 44	7820	p. 71	20KAKS	p. 123, 135, 161,	21KSIW	p. 182	25KBAW	p. 149, 169
6302	p. 28	7822	p. 71	20KATF	p. 123, 135, 161,	21KSTF	p. 182	25KBIM	p. 149
6304	p. 28	7828	p. 93	20KATS	p. 123, 135	21SBAW	p. 142, 166, 205	25KBIW	p. 149, 169
6306	p. 28	7860	p. 55	20KBAM	p. 135, 161	21SBIM	p. 142	25KBKO	p. 149, 169
6307	p. 28	7870	p. 55	20KBAW	p. 135, 161	21SBIW	p. 142, 167, 205	25KBTF	p. 149, 169
6316	p. 28	7871	p. 55	20KBIM	p. 135, 161	21SBKK	p. 142, 167	25KBTS	p. 149
6322	p. 29	7880	p. 53	20KBIW	p. 136, 161	21SBKO	p. 142, 167, 206	25KDAK	p. 183
6326	p. 29	7881	p. 53	20KBKO	p. 136, 162	21SBKS	p. 142, 167, 206	25KDIW	p. 183
6340	p. 28	7883	p. 53	20KBKS	p. 136, 162	21SBRP	p. 142	25KDTF	p. 183
6366	p. 29	7885	p. 53	20KBTF	p. 136, 162	21SBTF	p. 142, 167, 206	25KFAK	p. 149
6380	p. 29	7886	p. 53	20KBTS	p. 136	21SBTS	p. 142, 167, 206	25KFAW	p. 149, 169
6382	p. 29	7892	p. 63	20KFAM	p. 136	21SDAW	p. 182	25KFIW	p. 149, 170
6383	p. 29	7894	p. 63	20KFAW	p. 136	21SDIW	p. 182	25KFTF	p. 150, 170
6388	p. 29	7899	p. 83	20KFIM	p. 136	21SDTF	p. 182	25KLAK	p. 218
6402	p. 229	7910	p. 236	20KFKO	p. 136	21SFAF	p. 143	25KLAW	p. 218
6801	p. 41	7911	p. 236	20KFKS	p. 136	21SFAK	p. 125	25KLIW	p. 218
6802	p. 41	7913	p. 236	20KFTF	p. 136	21SFAM	p. 167	25KLKO	p. 218
6804	p. 41	7914	p. 236	20KFTS	p. 136	21SFAW	p. 125, 143, 167, 206	25KLTF	p. 218
6806	p. 41	7921	p. 89	20SBAM	p. 137, 162			25KSAK	p. 183
6819	p. 41	7926	p. 89	20SBAM	p. 137, 162	21SFIM	p. 125, 143, 167	25KSIW	p. 183
6826	p. 41	7930	p. 61	20SBIM	p. 137, 162	21SFIW	p. 125, 143, 167	25KSTF	p. 183
6840	p. 41	7931	p. 61	20SBIW	p. 137, 162			25SBAK	p. 150, 170
6866	p. 41	7932	p. 61	20SBKO	p. 137, 162	21SFKK	p. 143	25SBAW	p. 150, 170
6882	p. 41	7960	p. 89	20SBKS	p. 137, 162	21SFKO	p. 126, 143, 168	25SBIM	p. 150
6883	p. 41	7970	p. 83	20SBTF	p. 137, 162	21SFKS	p. 126, 143, 168	25SBIW	p. 150, 170
6899	p. 41	7971	p. 83	20SBTS	p. 137	21SFRP	p. 143	25SBKO	p. 150, 170
6901	p. 27	7984	p. 57	20SFAM	p. 123, 137, 162	21SFTF	p. 126, 144, 168, 207	25SBTF	p. 150, 170
6911	p. 27	7985	p. 57	20SFAW	p. 123, 137, 162			25SBTS	p. 150
6958	p. 27	7994	p. 57	20SFIM	p. 123, 137, 163	21SFTS	p. 126, 144	25SDAW	p. 183
6959	p. 27	7995	p. 57	20SFIW	p. 123, 137, 163	21SLAK	p. 216	25SDIW	p. 183
6974	p. 27	7996	p. 57	20SFKO	p. 124, 138, 163	21SLAN	p. 216	25SFAK	p. 150, 178, 190, 195,
6975	p. 27	9401A	p. 198	20SFKS	p. 124, 138, 163	21SLAO	p. 216		
6979	p. 27	9401E	p. 199	20SFRP	p. 138	21SLAW	p. 216	25SFAW	p. 151, 170, 178, 190,
6989	p. 27	9401U	p. 200	20SFTF	p. 124, 138, 163	21SLIW	p. 216		
6999	p. 27	9405A	p. 198	20SFTS	p. 124, 138	21SLKK	p. 216	25SFIM	p. 151, 170, 190, 195,
7000	p. 69, 236	9405U	p. 200	21KAAK	p. 125	21SLKO	p. 216	25SFIW	p. 151, 171, 178, 190,
7010	p. 67	9414A	p. 198	21KAAM	p. 165	21SLKS	p. 216		
7011	p. 67	9414E	p. 199	21KAAW	p. 125, 139, 165	21SLTF	p. 216	25SFKK	p. 151
7012	p. 67	9414U	p. 200	21KAIM	p. 139	21SLTS	p. 216	25SFKO	p. 151, 171
7030	p. 69	9416A	p. 198	21KAIW	p. 125, 139, 165	21SSAW	p. 182	25SFTF	p. 151, 171, 178, 190,
7031	p. 69	9416E	p. 199	21KAKE	p. 125	21SSIW	p. 182		
7040	p. 68	9416U	p. 200	21KAKK	p. 125, 139	21SSTF	p. 182		
7060	p. 67	9421A	p. 198	21KAKO	p. 125, 139, 165	22KAAK	p. 147	25SFTS	p. 151
7061	p. 67	9421E	p. 199	21KAKS	p. 125, 139, 165	22KAIW	p. 147	25SLAK	p. 218
7062	p. 67	9421U	p. 200	21KARP	p. 139	22KATF	p. 147	25SLAW	p. 218
7065	p. 67	02KAAM	p. 134	21KATE	p. 139	22SFAK	p. 128, 147, 194, 198	25SLIW	p. 218
7067	p. 67	02KAIM	p. 134	21KATF	p. 125, 139, 165			25SLTF	p. 218
7100	p. 70	02KATF	p. 134	21KATS	p. 125, 140, 165	22SFAW	p. 128, 147, 194, 198	25SSAW	p. 183
7101	p. 70	02KATS	p. 134	21KBAW	p. 140, 165, 203			25SSIW	p. 183
7110	p. 70	02SFAM	p. 134	21KBIM	p. 140	22SFIW	p. 128, 147, 194, 198	25SSTF	p. 183
7111	p. 70	02SFIM	p. 134	21KBIW	p. 140, 165, 203	22SFTF	p. 128, 147, 194, 198	26KAAW	p. 129
7130	p. 70	02SFTF	p. 134	21KBKE	p. 203			26KAIM	p. 129
7140	p. 70	02SFTS	p. 134	21KBKK	p. 140, 166	23KAAK	p. 145	26KAIW	p. 129
7160	p. 70	14KAAK	p. 128	21KBKO	p. 140, 166, 204	23KAAW	p. 145	26KAKK	p. 129

26KAKO	p. 129	72SBIW	p. 174	AK26SF	p. 323
26KATF	p. 129	73KBIW	p. 174	BVG4-L	p. 243
26KATS	p. 129	73SBIW	p. 174	BVG4-LOCK	p. 231
26KEAW	p. 195	73SFIW	p. 174	BVG4P-LOCK	p. 231
26KEIW	p. 195	74KBIW	p. 175	BVGT4-C	p. 240
26KETF	p. 195	74SBIW	p. 175	BVGT4-L	p. 243
26KPAW	p. 190	75KBIW	p. 157, 175	CLIP	p. 312
26KPIW	p. 190	75SBIW	p. 157, 175	DO	p. 295
26KPTF	p. 190	76KBIW	p. 175	DRV	p. 87
26SFAW	p. 129	76SBIW	p. 175	DS	p. 314
26SFIM	p. 129	84KPAW	p. 192	DV	p. 314
26SFIW	p. 129	84KPIW	p. 192	FA	p. 311
26SFKK	p. 129	84KPTF	p. 192	FF44	p. 297
26SFKO	p. 129	84SFAW	p. 192	FG43	p. 297
26SFTF	p. 130	84SFIW	p. 192	GI	p. 314
26SFTS	p. 130	84SFTF	p. 192	GT	p. 314
27KAAK	p. 154	95KSAK	p. 184	GT..R	p. 314
27KAAW	p. 154, 172	95KSAW	p. 184	HP3	p. 305
27KAIW	p. 154, 172	95KSIW	p. 184	KN	p. 314
27KATF	p. 154, 172	95KSTF	p. 184	RL	p. 296
27KBAK	p. 154	95SSAK	p. 184	SK	p. 311
27KBAW	p. 154, 172	95SSIW	p. 184	SP../050	p. 285
27KBIW	p. 154, 172	95SSTF	p. 184	SP../075	p. 285
27KBTF	p. 154, 172	96KSAK	p. 185	SP../100	p. 285
27KFAK	p. 154	96KSAW	p. 185	SP../150	p. 285
27KFAW	p. 155, 172	96KSIW	p. 185	SV	p. 314
27KFIW	p. 155	96KSTF	p. 185	VZ	p. 305
27KFTF	p. 155, 172	96SSAK	p. 185	YA	p. 295
27SBAK	p. 155	96SSAW	p. 185	YI	p. 295
27SBAW	p. 155, 173	96SSIW	p. 185	ZO	p. 295
27SBIW	p. 155, 173	96SSTF	p. 185		
27SBTF	p. 155, 173	200KLIWEK	p. 219		
27SFAK	p. 155, 179, 197	200SLIWEK	p. 219		
27SFAW	p. 155, 173, 179, 197	204SLAW	p. 214		
		204SLIW	p. 214		
27SFIW	p. 155, 173, 179, 197	204KLAW	p. 214		
		204KLIW	p. 214		
27SFTF	p. 155, 173, 179, 197	206SLAW	p. 217		
		206SLIW	p. 217		
30KAAW	p. 152	206KLAW	p. 217		
30KAIW	p. 152	206KLIW	p. 217		
30KATF	p. 152	209KLIW	p. 219		
30KPAW	p. 191	209SLIW	p. 219		
30KPIW	p. 191	303KBAW	p. 164		
30KPTF	p. 191	303KBIW	p. 164		
30SFAW	p. 152, 191, 201	303KBKO	p. 164		
30SFIW	p. 152, 191, 201	303KBTF	p. 164		
30SFTF	p. 152, 191, 201	303SBAW	p. 164		
37KAAW	p. 156	303SBIW	p. 164		
37KAIW	p. 156	303SBKO	p. 164		
37KATF	p. 156	303SBTF	p. 164		
37SFAK	p. 156	1400KAAK	p. 177		
37SFAW	p. 156	1400KAIW	p. 177		
37SFIW	p. 156	1400KATF	p. 177		
37SFTF	p. 156	1400KEAW	p. 193		
38KBAW	p. 158	1400KEIW	p. 193		
38KBIW	p. 158	1423KAAK	p. 177		
38KBTF	p. 158	1423KAIW	p. 177		
38SBAW	p. 158	1423KATF	p. 177		
38SBIW	p. 158	1600KAAK	p. 178		
38SBTF	p. 158	1600KAIW	p. 178		
38SFAW	p. 158	1600KATF	p. 178		
38SFIW	p. 158	1600KEAK	p. 196		
38SFTF	p. 158	1600KEIW	p. 196		
39KBAW	p. 159	1600KETF	p. 196		
39KBIW	p. 159	1625KAAK	p. 178		
39KBTF	p. 159	1625KAIW	p. 178		
39SBAW	p. 159	1625KATF	p. 178		
39SBIW	p. 159	1700KAAK	p. 179		
39SFIW	p. 159	1700KAIW	p. 179		
40KAIW	p. 153	1700KATF	p. 179		
40SFAK	p. 153	1700KEAW	p. 197		
40SFIW	p. 153	1700KEIW	p. 197		
40SFTF	p. 153	1727KAIW	p. 179		
71KBIW	p. 174	1727KATF	p. 179		
71SBIW	p. 174	AD	p. 317		
72KBIW	p. 174	AK13	p. 323		
		AK13SET	p. 323		

