### LiveWire I-Wrench Specifications

	Model number	Description		
R	without Chip Recognition Capability			
	197170001	I-Wrench Reversible ratchet 9 x 12 - 1/4"		
	197170002	I-Wrench Reversible ratchet 9 x 12 - 3/8"		
	197170003	I-Wrench Reversible ratchet 9 x 12 - 1/2"		
	197170005	I-Wrench Reversible ratchet 14 x 18 - 1/2"		
A	197170006	I-Wrench Reversible ratchet 14 x 18 - 3/4"		
T C H E T	197170007	I-Wrench Reversible ratchet Ø 20 - 3/4"		
	197170008	I-Wrench Reversible ratchet Ø 20 - 1"		
	58270010	I-Wrench Blank End Insert Tool 9 x 12		
	58270040	I-Wrench Blank End Insert Tool 14 x 18		
S	with Chip Recognition Capability			
	197179001	I-Wrench Reversible ratchet TR 9 x 12 - 1/4"		
	197179002	I-Wrench Reversible ratchet TR 9 x 12 - 3/8"		
	197179003	I-Wrench Reversible ratchet TR 9 x 12 - 1/2"		
	197179005	I-Wrench Reversible ratchet TR 14 x 18 - 1/2"		
	197179006	I-Wrench Reversible ratchet TR 14 x 18 - 3/4"		







### LiveWire I-Wrench Specifications

	Model number	Model name	Description		
	On the tool accessories				
	313110030	I-Wrench-DRP	Rubber protection with display protection		
	External accessories				
	197140013	I-Wrench-PU	Tool recognition programming unit		
	197130010-18	TAW-PSS3	Tool charging cradle (please add model name)		
	197130020	TAW-PSS3-RP 15/30	Tool charging cradle for Cleco LiveWire I-Wrench 15/30 Nm with rubber protection		
	197130021	TAW-PSS3-RP 70/100	Tool charging cradle for Cleco LiveWire I-Wrench 70/100 Nm with rubber protection		
	197130022	TAW-PSS3-RP 200	Tool charging cradle for Cleco LiveWire I-Wrench 200 Nm with rubber protection		
	197130023	TAW-PSS3-RP 300	Tool charging cradle for Cleco LiveWire I-Wrench 300 Nm with rubber protection		
	197130024	TAW-PSS3-RP 400	Tool charging cradle for Cleco LiveWire I-Wrench 400 Nm with rubber protection		
	197130025	TAW-PSS3-RP 600	Tool charging cradle for Cleco LiveWire I-Wrench 600 Nm with rubber protection		
	197130026	TAW-PSS3-RP 800	Tool charging cradle for Cleco LiveWire I-Wrench 800 Nm with rubber protection		
	197130027	TAW-PSS3-RP 1.000	Tool charging cradle for Cleco LiveWire I-Wrench 1.000 Nm with rubber protection		
	197130028	TAW-PSS3-RP 1.200	Tool charging cradle for Cleco LiveWire I-Wrench 1.200 Nm with rubber protection		
	313210042	I-Wrench-BA	Additional battery		
	197140017	I-Wrench-EC1	External battery charger for 1 battery with J21		
	197140018	I-Wrench-EC2	External battery charger for 1 battery with J21  External battery charger for 2 batteries with JS22  USB cable		
	197990008	I-Wrench-USB	USB cable		
	544249PT	DLink	Dual Access Point 2,4 & 5 GHz		
	333110016	Tag for Head	Tag for Head Recognition		
	102110003	Sqnet	Sqnet FTA Software for programming & downloading data (Standalone mode)		
	More accessories are available upon request. Please contact our Sales- & Service centers.  Please note: Ratchets are not included and need to be ordered separately. Neither are sockets which you can order from our Apex Bits & Sockets assortment.				



LiveWire I-Wrench for Production

Smart and Flexible.

LiveWire I-Wrench En Eu 0313
SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. © 2013 APEX TOOL GROUP GMBH & CO. OHG. PRINTED IN GERMANY.



LIVe**wire** 



# Wireless. Flexible. User-Friendly.

**Automatic Head** 

Recognition Feature

Color touch screen

### Your productivity - your freedom.

Software

CustomerProtocols

Production Server

Data Base

Our Cleco LiveWire I-Wrench is a true all around production tool to meet your flexible manufacturing needs. It is the perfect tool for advanced threaded tightenings. Additionally, it is suitable for your production line, enabling you to utilize both torque and angle tightening strategies.

The patented measuring system for the angle of rotation, the color display with touch screen and the large memory capacity of 1 GB make the Cleco LiveWire I-Wrench the most flexible and versatile wireless torque wrench available on the market.

**Correctional Factor** 

Torque / Angle

of Rotation for Special

Heads

### Accuracy.

- ± 0.5% deviation between 20% and 100% of the torque capacity
- ± 1% deviation between 10% and 20% of the torque capacity
- ± 0,1° display deviation of the

### Navigation.

Color touch screen navigation or menu navigation buttons

■ Torque & Angle Data

### Features.

- 1 GB memory for
- **20.000** values



RS422 - USB Interface

## **Visual Operator**

**Guidance & Vibration Notification** 

> **Measurement of Angle** of Rotation Independent

**Barcode Reader** 

### Production

- WIFI 2,4 and 5 GHz.
- Client or Stand-alone.
- Torque control Angle monitor.
- Angle control Torque monitor.

**■ PC / HMI (with mProRemote Software)** 

WLAN 2,4 & 5 GHz

**■** Direct to Server Or Remote

Operate via:

Data and graph transmission to Global Controller.

- Traces on Controller
- Application images

- **20.000** curves
- 1.000 parameter sets
- 9 hours battery life

Rechargeable Li-Ion Battery

### **Explanation Nomenclature**

PRW-0300-0110-WI

PRW-0400-0110-WI

PRW-0600-0110-WI

PRW-0800-0110-WI

PRW-1000-0110-WI


I-Wrench for Production

0015-1000 - I-Wrench Torque

0110 - no barcode reader, with rubber protection

1110 - with barcode reader. with rubber protection



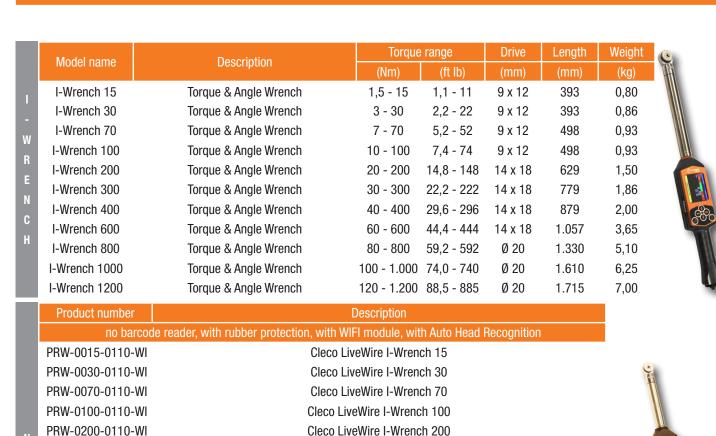

Cleco LiveWire I-Wrench 300

Cleco LiveWire I-Wrench 400

Cleco LiveWire I-Wrench 600

Cleco LiveWire I-Wrench 800

Cleco LiveWire I-Wrench 1000



with baroous reader,	with rubber protection, with will rinouale, with Auto
PRW-0015-1110-WI	Cleco LiveWire I-Wrench 15
PRW-0030-1110-WI	Cleco LiveWire I-Wrench 30
PRW-0070-1110-WI	Cleco LiveWire I-Wrench 70
PRW-0100-1110-WI	Cleco LiveWire I-Wrench 100
PRW-0200-1110-WI	Cleco LiveWire I-Wrench 200
PRW-0300-1110-WI	Cleco LiveWire I-Wrench 300
PRW-0400-1110-WI	Cleco LiveWire I-Wrench 400
PRW-0600-1110-WI	Cleco LiveWire I-Wrench 600
PRW-0800-1110-WI	Cleco LiveWire I-Wrench 800
PRW-1000-1110-WI	Cleco LiveWire I-Wrench 1000
PRW-1200-1110-WI	Cleco LiveWire I-Wrench 1200







module

from Temperature