


## Datasheet of 0101 20 27 39 Male stud coupling

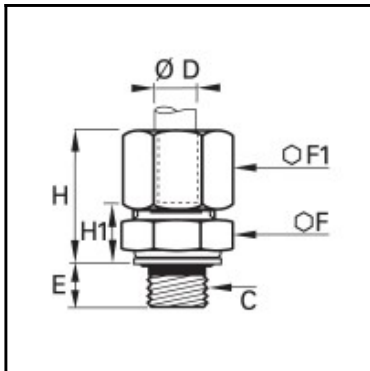

### Description

Compression fittings made of brass, male stud coupling, 20 mm - G3/4

In-line connection of a tubing with male thread, mit bonded seal.  
Available from 4 to 28 mm o.d., BSPT metric thread.

### Details

|                                  |                                |
|----------------------------------|--------------------------------|
| ØD:                              | 20 mm                          |
| C:                               | G3/4"                          |
| E:                               | 11,5                           |
| F:                               | 32                             |
| F1:                              | 32                             |
| H max:                           | 32,5                           |
| H1:                              | 14,5                           |
| Maximum working pressure in bar: | 550                            |
| Material seal:                   | Galvanized steel with NBR seal |
| Material body:                   | Brass                          |
| Material gripping ring:          | Brass                          |
| Material union nut:              | Brass                          |
| min. temperature in °C:          | -60                            |
| max. temperature in °C:          | 250                            |
| RoHS compliant:                  | Yes                            |
| Weight in kg:                    | 0,164                          |

### Dimensions

|        |       |
|--------|-------|
| ØD:    | 20 mm |
| C:     | G3/4" |
| E:     | 11,5  |
| F:     | 32    |
| F1:    | 32    |
| H max: | 32,5  |
| H1:    | 14,5  |