


Datasheet of 0118 04 10 39 Single banjo elbow connection

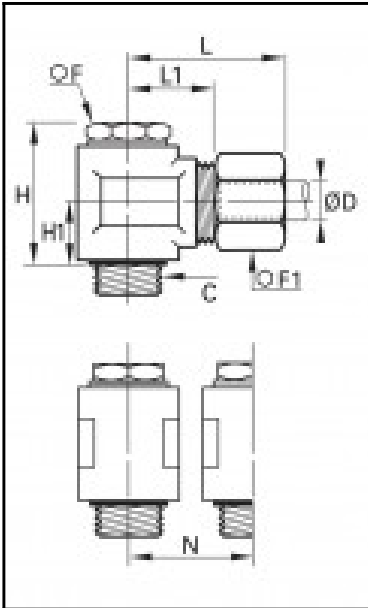

Description

Compression fittings made of brass, Single banjo elbow connection, 4 mm - G1/8

Single banjo elbow connection between tube and male thread, mit bonded seal. In space constrained environments it can be mounted from above with a spanner. Available form 4 to 22 mm o.d..

Details

| | |
|----------------------------------|--------------------------------|
| ØD: | 4 mm |
| C: | G1/8" |
| F: | 14 |
| F1: | 10 |
| H: | 23 |
| H1: | 9,5 |
| L max: | 24 |
| L1: | 14,5 |
| N: | 17,5 |
| Maximum working pressure in bar: | 550 |
| Material seal ring: | Galvanized steel with NBR seal |
| Material adjusting spindle: | Brass |
| Material body: | Brass |
| Material gripping ring: | Brass |
| Material union nut: | Brass |
| min. temperature in °C: | -60 |
| max. temperature in °C: | 250 |
| RoHS compliant: | Yes |
| Weight in kg: | 0,039 |

Dimensions

| | |
|--------|-------|
| ØD: | 4 mm |
| C: | G1/8" |
| F: | 14 |
| F1: | 10 |
| H: | 23 |
| H1: | 9,5 |
| L max: | 24 |
| L1: | 14,5 |
| N: | 17,5 |