


## Datasheet of 0400 10 17 Ball valve

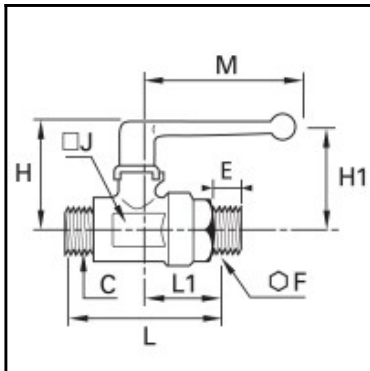

### Description

Ball valves Brass, 2/2-way ball valve, Brass nickel plated, NW 10, G3/8

In-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### Details

C:	G3/8"
E:	11
F:	24
H:	45
H1:	43
J:	24
L:	70
L1:	43
M:	69
Bore in mm:	10
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,252

### Dimensions

C:	G3/8"
E:	11
F:	24
H:	45
H1:	43
J:	24
L:	70
L1:	43
M:	69