


## Datasheet of 0414 06 08 Ball valve

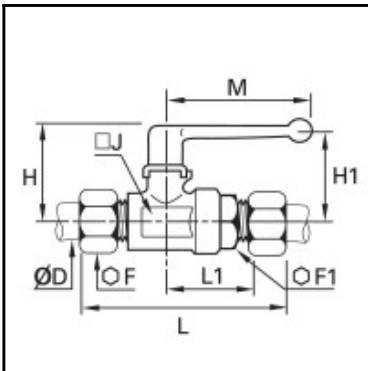

### Description

Ball valves Brass, 2/2-way ball valve with compression fitting, Brass nickel plated, NW 6, for tube 8 mm

In-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### Details

ØD:	8 mm
F:	14
F1:	19
H:	38
H1:	31
J:	19
L:	74
L1:	30
M:	48
Bore in mm:	6
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material gripping ring:	Brass
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
Material union nut:	Brass nickel plated
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,18

### Dimensions

ØD:	8 mm
F:	14
F1:	19
H:	38
H1:	31
J:	19
L:	74
L1:	30
M:	48