

## Datasheet of 0432 13 21 Ball valve



### Description


Ball valves Brass, 2/2-way ball valve, lockable, Brass nickel plated, NW 13, G1/2

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration

### Details

C:	G1/2"
E:	15
F:	27
F1:	27
H:	62
H1:	57
L:	67
L1:	34
M:	69
Bore in mm:	13
Maximum working pressure in bar:	40
Material lock plate:	Galvanized steel
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,522

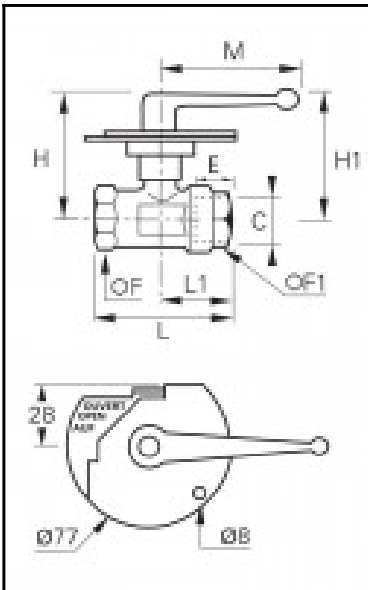

### Dimensions

C:	G1/2"
E:	15
F:	27
F1:	27
H:	62
H1:	57
L:	67
L1:	34
M:	69