

Datasheet of 0432 20 27 Ball valve



Description


Ball valves Brass, 2/2-way ball valve, lockable, Brass nickel plated, NW 20, G3/4

In-line ball valve for opening and closing a fluid system. It is possible to add a padlock for securing the ball valve and thus preventing potentially dangerous, unwanted operation.

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration

Details

C:	G3/4"
E:	16,5
F:	32
F1:	38
H:	66
H1:	56
L:	80
L1:	39
M:	108
Bore in mm:	20
Maximum working pressure in bar:	40
Material lock plate:	Galvanized steel
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,8

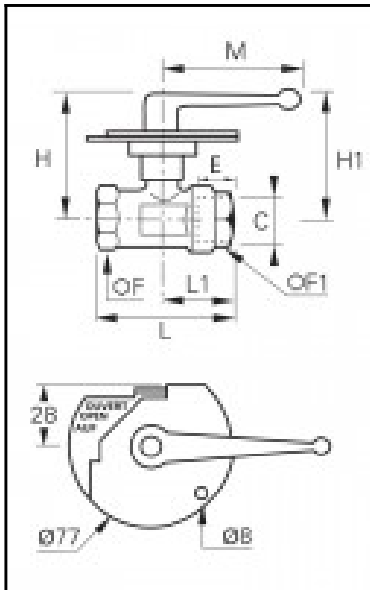

Dimensions

C:	G3/4"
E:	16,5
F:	32
F1:	38
H:	66
H1:	56
L:	80
L1:	39
M:	108