


## Datasheet of 0449 10 17 Ball valve

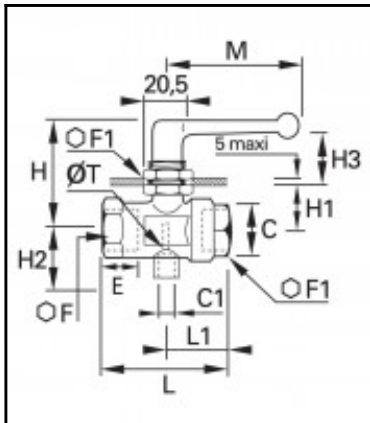

### Description

Ball valves Brass, 3/2-way ball valve with threaded exhaust, panel-mountable, Brass nickel plated, NW 10, G3/8

With exhaust port thread and panel-mountable. For full or partial venting of the pipes. Single flow direction (signed with an arrow on the body).

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### Details

C:	G3/8"
C1:	M5x0,8
E:	12
F:	24
F1:	27
H:	50
H1:	20
H2:	17
H3:	21
L:	59
L1:	31
M:	69
T:	2,5
Bore in mm:	10
Maximum working pressure in bar:	20
Material seal:	NBR
Material body:	Brass nickel plated
Material locknut:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,291

### Dimensions

C:	G3/8"
C1:	M5x0,8
E:	12
F:	24
F1:	27
H:	50
H1:	20
H2:	17
H3:	21
L:	59
L1:	31
M:	69
T:	2,5