


Datasheet of 0449 13 21 Ball valve

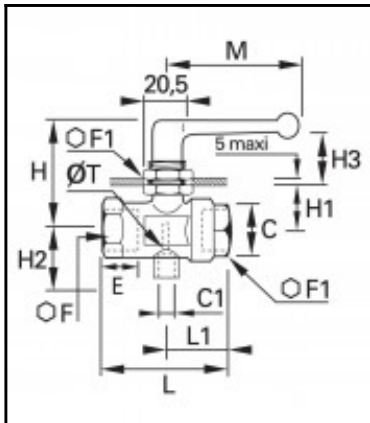

Description

Ball valves Brass, 3/2-way ball valve with threaded exhaust, panel-mountable, Brass nickel plated, NW 13, G1/2

With exhaust port thread and panel-mountable. For full or partial venting of the pipes. Single flow direction (signed with an arrow on the body).

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

Details

C:	G1/2"
C1:	G1/8"
E:	15
F:	27
F1:	27
H:	52
H1:	23
H2:	24
H3:	21
L:	67
L1:	34
M:	69
T:	4
Bore in mm:	13
Maximum working pressure in bar:	20
Material seal:	NBR
Material body:	Brass nickel plated
Material locknut:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,352

Dimensions

C:	G1/2"
C1:	G1/8"
E:	15
F:	27
F1:	27
H:	52
H1:	23
H2:	24
H3:	21
L:	67
L1:	34
M:	69
T:	4