


Datasheet of 0469 10 17 Ball valve

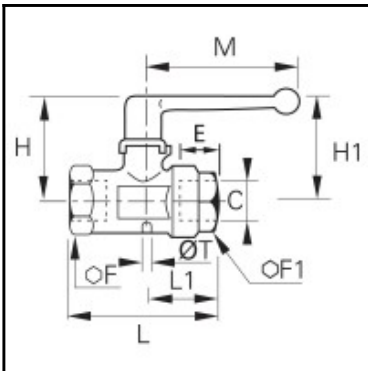

Description

Ball valves Brass, 3/2-way ball valve with threaded exhaust, Brass nickel plated, NW 10, G3/8

With vent (for applications without special requirements). For full or partial venting of the pipes. Single flow direction (signed with an arrow on the body).

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

Details

C:	G3/8"
E:	12
F:	24
F1:	24
H:	46
H1:	43
L:	59
L1:	31
M:	70
T:	2
Bore in mm:	10
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,246

Dimensions

C:	G3/8"
E:	12
F:	24
F1:	24
H:	46
H1:	43
L:	59
L1:	31
M:	70
T:	2