


Datasheet of 0469 18 27 Ball valve

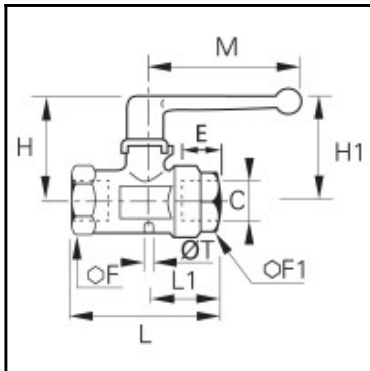

Description

Ball valves Brass, 3/2-way ball valve with threaded exhaust, Brass nickel plated, NW 18, G3/4

With vent (for applications without special requirements). For full or partial venting of the pipes. Single flow direction (signed with an arrow on the body).

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

Details

C:	G3/4"
E:	16,5
F:	32
F1:	38
H:	63
H1:	54
L:	80
L1:	39
M:	108
T:	2,5
Bore in mm:	18
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,668

Dimensions

C:	G3/4"
E:	16,5
F:	32
F1:	38
H:	63
H1:	54
L:	80
L1:	39
M:	108
T:	2,5