


Datasheet of 0469 23 34 Ball valve

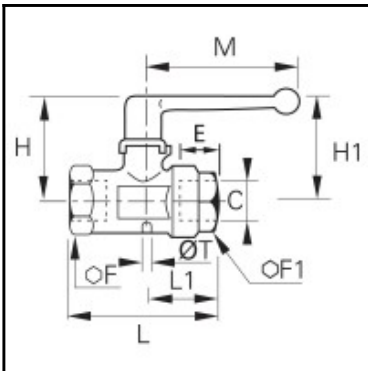

Description

Ball valves Brass, 3/2-way ball valve with threaded exhaust, Brass nickel plated, NW 23, G1

With vent (for applications without special requirements). For full or partial venting of the pipes. Single flow direction (signed with an arrow on the body).

- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

Details

C:	G1"
E:	19
F:	41
F1:	46
H:	67
H1:	57
L:	94
L1:	47
M:	108
T:	3
Bore in mm:	23
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	1,026

Dimensions

C:	G1"
E:	19
F:	41
F1:	46
H:	67
H1:	57
L:	94
L1:	47
M:	108
T:	3