


## Datasheet of 0483 04 10 Ball valve

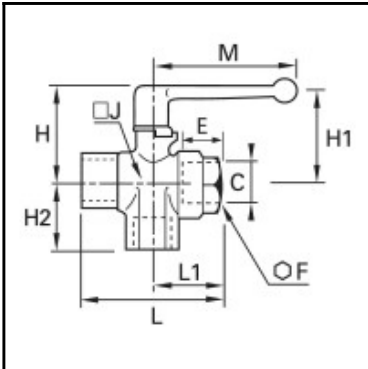

### Description

Ball valves Brass, 3/3-way T-ball valve not lockable, Brass nickel plated, NW 4, G1/8

Female threaded with T-bore and closed position. For opening and closing a fluid system with a simple half turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### Details

C:	G1/8"
E:	8
F:	14
H:	35
H1:	29
H2:	18
J:	14
L:	44
L1:	25
M:	48
Bore in mm:	4
Maximum working pressure in bar:	20
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,102

### Dimensions

C:	G1/8"
E:	8
F:	14
H:	35
H1:	29
H2:	18
J:	14
L:	44
L1:	25
M:	48