


## Datasheet of 0483 18 27 Ball valve

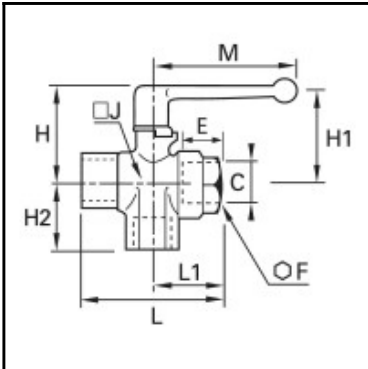

### Description

Ball valves Brass, 3/3-way T-ball valve not lockable, Brass nickel plated, NW 18, G3/4

Female threaded with T-bore and closed position. For opening and closing a fluid system with a simple half turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

### Details

C:	G3/4"
E:	16,5
F:	38
H:	59
H1:	51
H2:	40
J:	39
L:	80
L1:	39
M:	108
Bore in mm:	18
Maximum working pressure in bar:	20
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,716

### Dimensions

C:	G3/4"
E:	16,5
F:	38
H:	59
H1:	51
H2:	40
J:	39
L:	80
L1:	39
M:	108