


Datasheet of 4020 56 00WP2 Ball valve

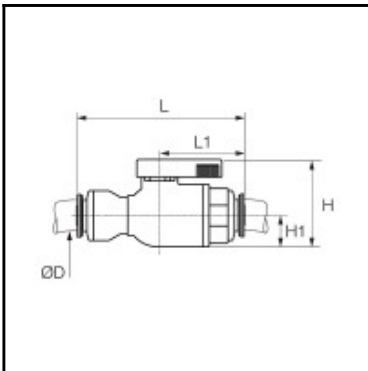

Description

Ball valves LIQUIFIT, 2/2-way ball valve LIQUIfit®, 1/4 - 1/4

Full flow.

Full-flow self-cleaning ball maintains the cleanliness of the circuit

Carstick connection providing resistance to water hammer

Inert technical polymer providing the best mechanical strength, thermal and chemical resistance
FDA, NSF 51, meet WQA (Water Quality Association) requirements.

Details

ØD:	1/4"
H:	25
H1:	13
L:	65
L1:	31
Maximum working pressure in bar:	10
Material seal:	EPDM
Material body:	Polypropylene with glass fibers
Material lever:	Polyamide
Material stem:	Polysulfone
Material toothed washer:	Stainless steel
min. temperature in °C:	-15
max. temperature in °C:	100
RoHS compliant:	Yes
Weight in kg:	0,015

Dimensions

ØD:	1/4"
H:	25
H1:	13
L:	65
L1:	31