
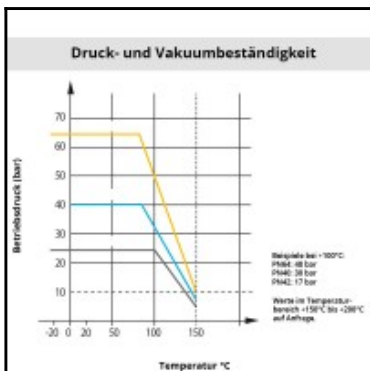


Datasheet of 4812 50 48 Ball valve

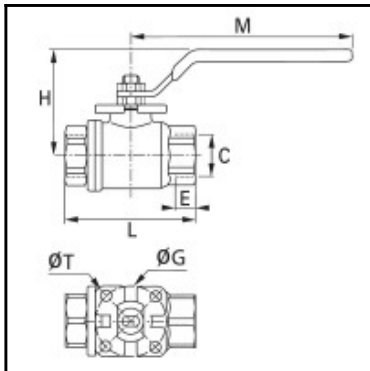

Description

Ball valves Stainless steel, 2/2-way ball valve with fixing plate, Stainless steel 316l, NW 50, G2

Connection of pneumatic or electric actuators due to the special sub-base. Excellent chemical resistance to aggressive fluids and environments. Good pressure resistance.

Details

C:	G2"
E:	26
G:	70
H:	107
L:	131
M:	250
T:	8,5
Bore in mm:	50
Material seal:	PTFE
Material adjusting spindle:	Stainless steel
Material body:	Stainless steel 316l
Material lever:	Stainless steel
Material stem:	Stainless steel 316l
Material toothed washer:	Stainless steel
Nominal pressure in bar:	64
min. temperature in °C:	-20
max. temperature in °C:	150
RoHS compliant:	Yes
Weight in kg:	3,262

Dimensions

C:	G2"
E:	26
G:	70
H:	107
L:	131
M:	250
T:	8,5