


Datasheet of 6402 13 21 Ball valve

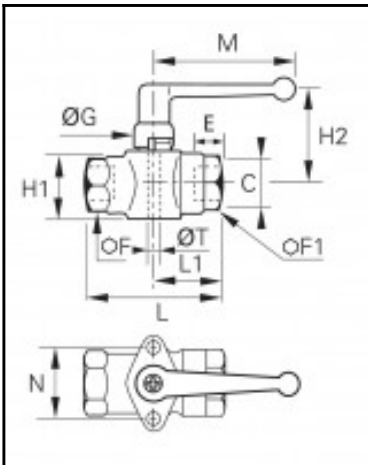

Description

Ball valves Brass, 2/2-way ball valve for screw fixing, Brass nickel plated, NW 13, G1/2

Panel-mountable. In-line ball valve for closing fluid systems with a simple quarter turn of the handle.

- suitable for use with steel tube
- full flow
- optimum sealing due to compensating O rings
- excellent resistance to scaling due to ball seal configuration.

Details

C:	G1/2"
E:	15
F:	27
F1:	27
G:	20
H1:	34
H2:	47
L:	67
L1:	34
M:	69
N:	34
T:	6x100
Bore in mm:	13
Maximum working pressure in bar:	40
Material seal:	NBR
Material body:	Brass nickel plated
Material seat seal:	NBR
Material lever:	Zamac
Material stem:	Brass, Brass nickel plated
Material plug sockets O-ring:	NBR
min. temperature in °C:	-40
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,404

Dimensions

C:	G1/2"
E:	15
F:	27
F1:	27
G:	20
H1:	34
H2:	47
L:	67
L1:	34
M:	69
N:	34
T:	6x100