
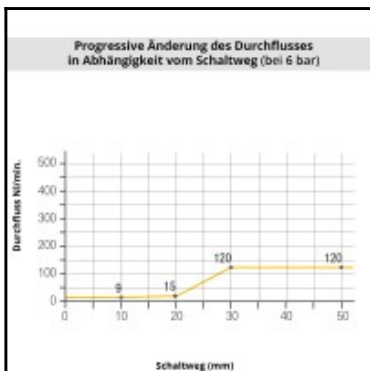


## Datasheet of 0653 66 13 Blowgun

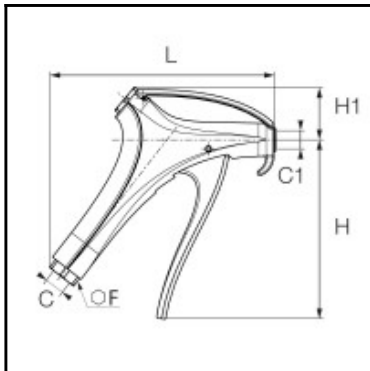

### Description

Blowguns, Energy saving-blowgun with interchangeable nozzle, connection nozzle M12x1,25, connection G1/4

Combines progressive flow control, safety, energy saving and ergonomics. Conforms with regulations of cleaning operations. Its integrated inviolable flow reducer provides full and active safety. The flow reducer system allows for 40% saving in air consumption and guarantees stable flow max 120NI/min. Can be adapted to all available interchangeable nozzles.

### Details

C:	G1/4"
C1:	M12x1,25
F:	20
H:	117
H1:	34
L:	147
Maximum working pressure in bar:	10
Material seal:	NBR
Material nozzle:	Brass nickel plated
Material body:	Engineered polymer
Material threaded fitting:	Brass nickel plated
Material lever:	Engineered polymer
min. temperature in °C:	-15
max. temperature in °C:	50
RoHS compliant:	Yes
Weight in kg:	0,144

### Dimensions

C:	G1/4"
C1:	M12x1,25
F:	20
H:	117
H1:	34
L:	147