


Datasheet of 0931 15 21 Quick-acting barbed fitting

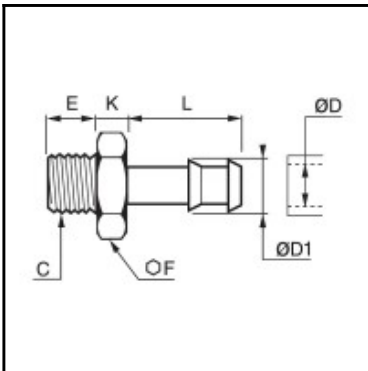

Description

Quick-acting barbed fittings made of brass, tailpiece adaptor for plastic tube, male thread, G1/2 - 15 mm

Quick connection of self-fastening hose to a male port. Available in 6 to 18 mm outer diameter.

Details

ØD:	15 mm
ØD1:	17 mm
C:	G1/2"
E:	10
F:	22
K:	6
L:	24
Maximum working pressure in bar:	60
Material body:	Brass nickel plated
min. temperature in °C:	-10
max. temperature in °C:	80
RoHS compliant:	Yes
Weight in kg:	0,037

Dimensions

ØD:	15 mm
ØD1:	17 mm
C:	G1/2"
E:	10
F:	22
K:	6
L:	24