

Datasheet of 7630 04 00 Flow regulator



Description



Polymer flow regulators, Miniature-Plug-in flow regulator, exhaust., 4 mm - 4 mm

Plug-in non-return throttle valve, threaded:

- Miniature with push-in connection
- external screw for throttling exhaust air
- reliable, precise and progressive adjustment
- lock nut guaranteeing stability of adjustment
- very easy to install in adapted cavity type cartridges
- perfectly adapted to small dimensions due to their compactness

Details

ØD:	4 mm
F:	6
G:	9
H min:	25,5
H max:	28
H1:	9,5
H2:	15,5
L:	17
Maximum working pressure in bar:	10
Material seal:	NBR
Material spigot:	Brass nickel plated
Material adjusting spindle:	Brass nickel plated
Material body:	Engineered polymer
Material locknut:	Brass nickel plated
Material toothed washer:	Stainless steel
max. temperature in °C:	70
RoHS compliant:	Yes
Weight in kg:	0,007

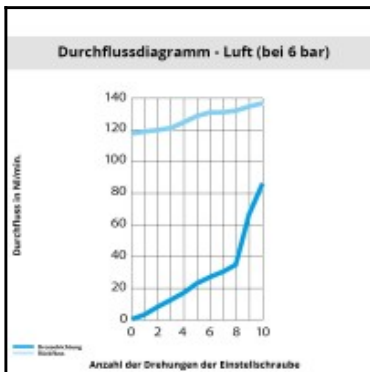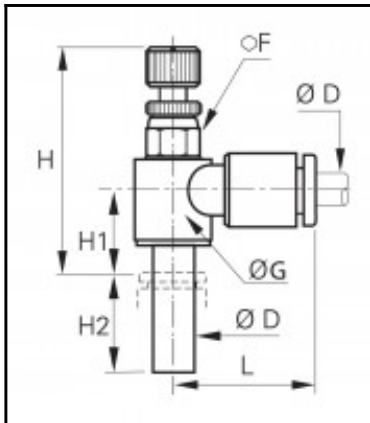

Dimensions

ØD:	4 mm
F:	6
G:	9
H min:	25,5
H max:	28
H1:	9,5
H2:	15,5
L:	17