


## Datasheet of 7800 06 19 Manually-operated valve

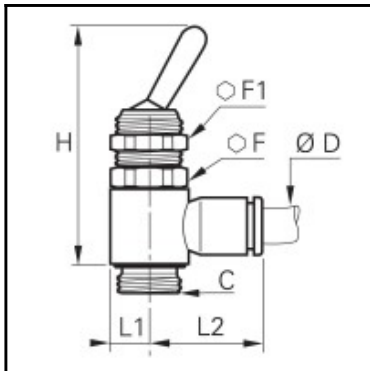

### Description

Manually-operated valves, 3/2-way manual switch operated valve, supply, 6 mm - M5x0,8

3/2-way manual switch operated valve with push-in connection (flow regulator, supply):

- Opening/closing/vent
- Can be used whenever the system has to be frequently vented
- Mounted directly on the cylinder (open/closed /exhaust)
- G- and metric threads

### Details

ØD:	6 mm
C:	M5x0,8
F:	14
F1:	14
H:	55
L1:	7
L2:	18,5
Maximum working pressure in bar:	10
Material seal:	NBR
Material adjusting spindle:	Brass nickel plated
Material body:	Engineered polymer
Material locknut:	Brass nickel plated
Material lever:	Brass nickel plated
Material toothed washer:	Stainless steel
min. temperature in °C:	-10
max. temperature in °C:	80
Vacuum resistance in mm Hg:	755
RoHS compliant:	Yes
Weight in kg:	0,032

### Dimensions

ØD:	6 mm
C:	M5x0,8
F:	14
F1:	14
H:	55
L1:	7
L2:	18,5