


Datasheet of 7822 00 17 Flow regulator

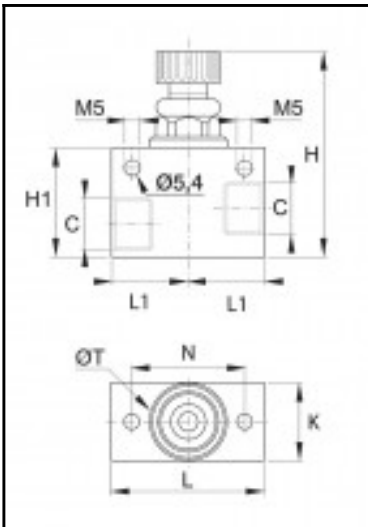

Description

Metal regulators, regulator in-line made of stainless steel, bi-directional, G3/8 - G3/8

throttle valve, threaded, made of stainless steel, bi-directional:

- for line installation
- Large adjustment screw and lock nut guaranteeing stability of adjustment
- Throttling of air supply and exhaust, no non-return function.
- ideally suited for aggressive atmospheres or environments submitted to severe chemical or mechanical constraints
- for all pneumatic applications or to convey fluids compatible with FKM and PTFE seals

Details

C:	G3/8"
H min:	58
H max:	65
H1:	35
K:	25
L:	50
L1:	25
N:	36
T:	20
Flow rate in l/min:	86
Bore in mm:	9
Maximum working pressure in bar:	40
Material seal:	FKM
Material adjusting spindle:	Stainless steel 316l
Material body:	Stainless steel 316l
Material seat seal:	PTFE
Material lever:	Stainless steel 316l
Material stem:	Stainless steel 316l
min. temperature in °C:	-15
max. temperature in °C:	120
RoHS compliant:	Yes
Weight in kg:	0,296

Dimensions

C:	G3/8"
H min:	58
H max:	65
H1:	35
K:	25
L:	50
L1:	25
N:	36
T:	20