


Datasheet of 7860 12 21 Softstart fitting

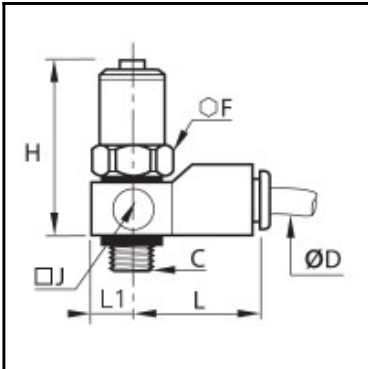

Description

Softstart fittings, Softstart fitting for isolating valve, 12 mm - G1/2

Legris softstart fittings with push-in connection and G-thread: Allow air pressure to gradually increase. Designed to be mounted on the FRL outlet or group of valves,. They protect the whole downstream installation. Instant connection and BSP parallel thread.

Details

ØD:	12 mm
C:	G1/2"
F:	22
H min:	63,5
H max:	70,5
J:	25
L:	45
L1:	12,5
Maximum working pressure in bar:	10
Material seal ring:	Engineered polymer
Material seal:	NBR
Material body:	Engineered polymer
Material body 2:	Brass nickel plated
Material toothed washer:	Stainless steel
min. temperature in °C:	-15
max. temperature in °C:	60
RoHS compliant:	Yes
Weight in kg:	0,152

Dimensions

ØD:	12 mm
C:	G1/2"
F:	22
H min:	63,5
H max:	70,5
J:	25
L:	45
L1:	12,5