


Datasheet of 7861 17 17 Softstart fitting

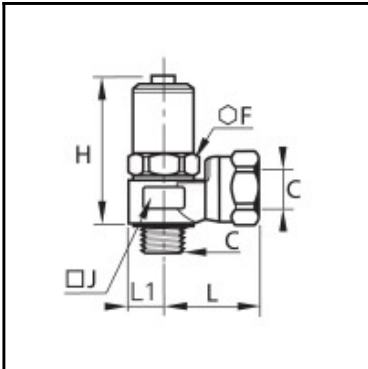

Description

Softstart fittings, Softstart fitting for isolating valve, G3/8 - G3/8

Legris softstart fittings mit female thread and G-threads: Allow air pressure to gradually increase. Designed to be mounted on the FRL outlet or group of valves,. They protect the whole downstream installation. Instant connection and BSP parallel thread.

Details

C:	G3/8"
F:	22
H min:	55
H max:	62
J:	24
L:	31
L1:	12
Maximum working pressure in bar:	10
Material seal ring:	Engineered polymer
Material seal:	NBR
Material body:	Brass nickel plated
Material body 2:	Brass nickel plated
min. temperature in °C:	-15
max. temperature in °C:	60
RoHS compliant:	Yes
Weight in kg:	0,139

Dimensions

C:	G3/8"
F:	22
H min:	55
H max:	62
J:	24
L:	31
L1:	12