


Datasheet of 7871 13 13 Softstart fitting

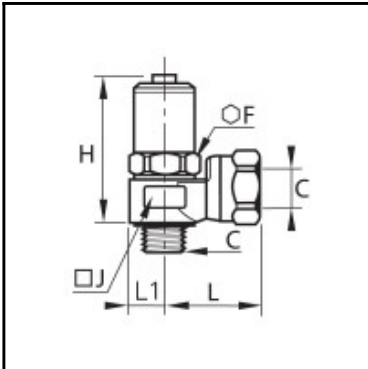

Description

Softstart fittings, Softstart fitting for control valve, G1/4 - G1/4

Legris softstart fittings mit female thread and G-threads: Allow air pressure to gradually increase. Designed to be mounted on the FRL outlet or group of valves,. Instant connection and BSP parallel thread.

Details

C:	G1/4"
F:	22
H min:	55
H max:	62
J:	24
L:	31
L1:	12
Maximum working pressure in bar:	10
Material seal ring:	Engineered polymer
Material seal:	NBR
Material body:	Brass nickel plated
Material body 2:	Brass nickel plated
min. temperature in °C:	-15
max. temperature in °C:	60
RoHS compliant:	Yes
Weight in kg:	0,148

Dimensions

C:	G1/4"
F:	22
H min:	55
H max:	62
J:	24
L:	31
L1:	12