


Datasheet of 7880 12 21 Blocking fitting

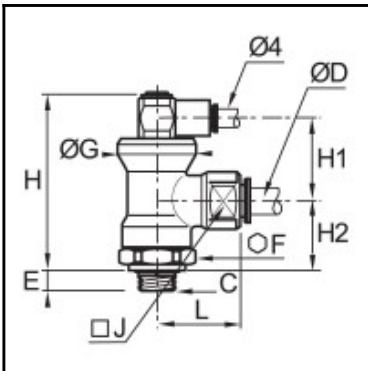

Description

Blocking fittings, Blocking fitting, 12 mm - G1/2

Blocking fitting with push-in connection, G-thread:

- Fully orientable in order to facilitate system design and connection
- Body in treated brass
- Optimum flow capacity in small spaces
- excellent resistance to aggressive environments (saline atmosphere and sparks).

Details

ØD:	12 mm
C:	G1/2"
E:	9
F:	24
G:	28
H:	58
H1:	25
H2:	25
J:	27
L:	37,5
Maximum working pressure in bar:	10
Material seal:	NBR
Material body:	Brass nickel plated
Material threaded fitting:	Brass nickel plated
Material toothed washer:	Stainless steel
min. temperature in °C:	-20
max. temperature in °C:	70
RoHS compliant:	Yes
Weight in kg:	0,22

Dimensions

ØD:	12 mm
C:	G1/2"
E:	9
F:	24
G:	28
H:	58
H1:	25
H2:	25
J:	27
L:	37,5