


Datasheet of 7885 08 17 Blocking fitting

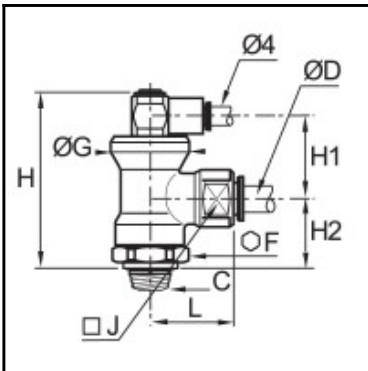

Description

Blocking fittings, Blocking fitting, 8 mm - R3/8

Blocking fitting with push-in connection and precoated thread:

- Fully orientable in order to facilitate system design and connection
- Body in treated brass
- Optimum flow capacity in small spaces
- Fully orientable in order to facilitate system design and connection
- excellent resistance to aggressive environments (saline atmosphere and sparks).

Details

ØD:	8 mm
C:	R3/8"
F:	21
G:	24
H:	51,5
H1:	25
H2:	20
J:	17
L:	28
Maximum working pressure in bar:	10
Seal coating:	PTFE
Material seal:	NBR
Material body:	Brass nickel plated
Material threaded fitting:	Brass nickel plated
Material diaphragm:	NBR
Material toothed washer:	Stainless steel
min. temperature in °C:	-20
max. temperature in °C:	70
RoHS compliant:	Yes
Weight in kg:	0,131

Dimensions

ØD:	8 mm
C:	R3/8"
F:	21
G:	24
H:	51,5
H1:	25
H2:	20
J:	17
L:	28