


## Datasheet of 7892 12 21 Non-return valve

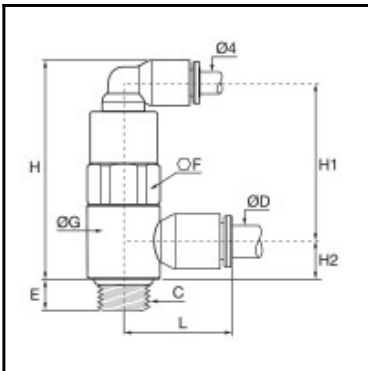

### Description

Non-return valves, Piloted Non-return valve, 12 mm - G1/2

Designed to protect your installations: blocks cylinder movement instantaneously, allows the cylinder to stop in a mid-stroke position, maintains loads in case of loss of pressure or emergency shut-off

### Details

ØD:	12 mm
C:	G1/2"
E:	10
F:	24
G:	28
H:	63
H1:	47
H2:	16
L:	36
Maximum working pressure in bar:	10
Material lock plate:	
Material boot:	
Material deflector:	
Material seal ring:	
Material seal:	NBR
Material nozzle:	
Material spigot:	
Material adjusting spindle:	
Material spring:	
Material body:	Engineered polymer
Material body 2:	Brass nickel plated
Material threaded fitting:	
Material sliding sleeve:	
Material gripping ring:	
Material piston:	Brass treated
Material locknut:	
Material balls:	
Material seat seal:	
Material release button:	
Material diaphragm:	
Material non-return valve:	
Material silencer:	
Material lever:	
Material stem:	
Material plug sockets O-ring:	
Material union nut:	
Material toothed washer:	Stainless steel
min. temperature in °C:	-5
max. temperature in °C:	60
RoHS compliant:	Yes
Weight in kg:	0,15

### Dimensions

ØD:	12 mm
C:	G1/2"
E:	10
F:	24
G:	28
H:	63
H1:	47
H2:	16
L:	36