


Datasheet of Filter/regulator/lubricator (three-part) Newdeal - 1324054

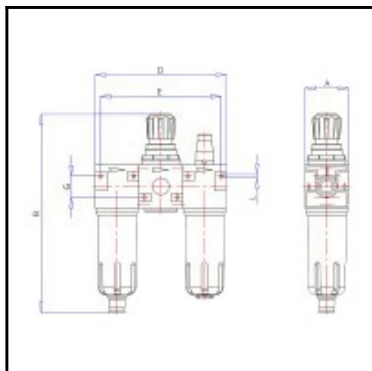

Description

Three-part service unit Newdeal, connection G 3/8", flow rate 1300 l/min., degree of filtration 20 µm, maximum inlet pressure 18 bar

Robust service unit made of metal.
Adjusted pressure stays constant despite pressure variations.
Metal container with 360° viewing window.
Quantity of lubricant proportioned to air flow.
Micrometric regulation of lubricant flow.
Activates at low flow rates.
Including pressure gauge.

Details

Series:	Newdeal
B:	245
E:	166
G:	28
L:	M4 suitable
N:	1/8" pressure gauge connection
Connection:	Female thread G 3/8"
max. inlet pressure:	18
Type of oiling:	Drip lubricator
Filterfeinheit in µm:	20
Flow rate in l/min:	1300
Shielding:	Technopolymer
Shielding plate:	Technopolymer
Container:	Aluminium
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Adjusting nut:	Brass Ms58
Adjusting screw:	Brass Ms58
Filter element:	HDPE
Inner container:	Transparent technopolymer
Body:	Zamac
Piston:	Technopolymer
Lip seal:	NBR
Oil sight glass:	Technopolymer
Control needle:	Brass Ms58
Ring nut:	Technopolymer
Hose:	Rislan®
Bar:	Brass Ms58
Plug:	Technopolymer
Valve spring:	Steel
Valve part:	Vulcanized with NBR
Venturi system:	NBR
Centrifuge:	Technopolymer
Weight in kg:	2,365

Dimensions

A:	60
B:	245
D:	180
E:	166
G:	28
L:	M4 suitable
N:	1/8" pressure gauge connection