


## Datasheet of Filter/regulator/lubricator (three-part) Newdeal - 1424054

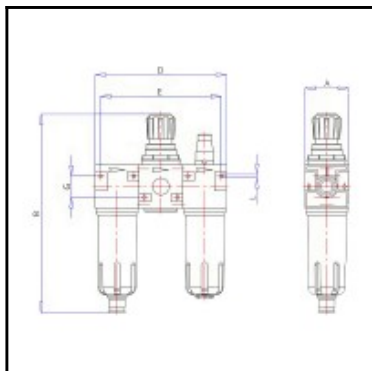

### Description

Three-part service unit Newdeal, connection G 1/2", flow rate 2000 l/min., degree of filtration 20 µm, maximum inlet pressure 18 bar

Robust service unit made of metal.  
Adjusted pressure stays constant despite pressure variations.  
Metal container with 360° viewing window.  
Quantity of lubricant proportioned to air flow.  
Micrometric regulation of lubricant flow.  
Activates at low flow rates.  
Including pressure gauge.

### Details

Series:	Newdeal
B:	245
E:	166
G:	28
L:	M4 suitable
N:	1/8" pressure gauge connection
Connection:	Female thread G 1/2"
max. inlet pressure:	18
Type of oiling:	Drip lubricator
Filterfeinheit in µm:	20
Flow rate in l/min:	2000
Shielding:	Technopolymer
Shielding plate:	Technopolymer
Container:	Aluminium
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Adjusting nut:	Brass Ms58
Adjusting screw:	Brass Ms58
Filter element:	HDPE
Inner container:	Transparent technopolymer
Body:	Zamac
Piston:	Technopolymer
Lip seal:	NBR
Oil sight glass:	Technopolymer
Control needle:	Brass Ms58
Ring nut:	Technopolymer
Hose:	Rislan®
Bar:	Brass Ms58
Plug:	Technopolymer
Valve spring:	Steel
Valve part:	Vulcanized with NBR
Venturi system:	NBR
Centrifuge:	Technopolymer
Weight in kg:	2,288

### Dimensions

A:	60
B:	245
D:	180
E:	166
G:	28
L:	M4 suitable
N:	1/8" pressure gauge connection