


## Datasheet of Filter regulator Newdeal - 1325054

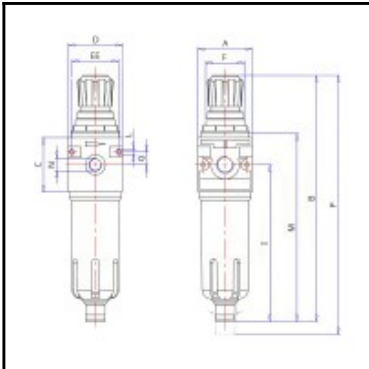

### Description

Filter regulator Newdeal, connection G 3/8", flow rate 1000 l/min., degree of filtration 20 µm, maximum inlet pressure 18 bar

Robust filter regulator made of metal.  
Adjusted pressure stays constant despite pressure variations.  
Standard overpressure blowoff valve.  
Direct wall fixing or with distance.  
Metal container with 360° viewing window.  
Including pressure gauge.

### Details

Series:	Newdeal
B:	245
C:	60
F:	38 x 2
G:	14
L:	M4 suitable
M:	185
N:	1/8" pressure gauge connection
Connection:	Female thread G 3/8"
max. inlet pressure:	18
Filterfeinheit in µm:	20
Flow rate in l/min:	1000
Shielding:	Technopolymer
Shielding plate:	Technopolymer
Container:	Aluminium
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Adjusting nut:	Brass Ms58
Adjusting screw:	Brass Ms58
Filter element:	HDPE
Inner container:	Transparent technopolymer
Body:	Zamac
Piston:	Technopolymer
Lip seal:	NBR
Ring nut:	Technopolymer
Bar:	Brass Ms58
Plug:	Technopolymer
Valve spring:	Steel
Valve part:	Vulcanized with NBR
Centrifuge:	Technopolymer
Weight in kg:	0,963

### Dimensions

A:	60
B:	245
C:	60
D:	60
EE:	52
F:	38 x 2
G:	14
I:	150
L:	M4 suitable
M:	185
N:	1/8" pressure gauge connection
P:	295