


## Datasheet of Regulator Newdeal - 1402003

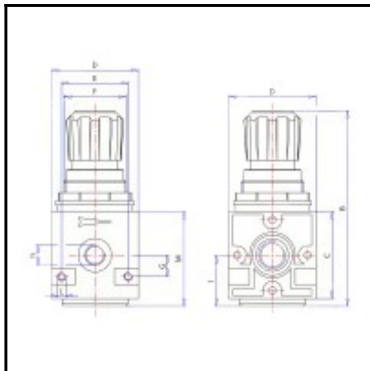

### Description

Piston-regulator Newdeal, connection G 1/2", flow rate 2500 l/min., maximum inlet pressure 18 bar

Highly reliable, heavy-duty piston-operated regulator.  
Adjusted pressure stays constant despite pressure variations.  
Standard overpressure blowoff valve.  
Direct wall fixing or with distance.  
Including pressure gauge.

### Details

Series:	Newdeal
B:	130
C:	60
F:	38 x 2
G:	14
L:	M4 suitable
M:	70
N:	1/8" pressure gauge connection
Connection:	Female thread G 1/2"
max. inlet pressure:	18
Flow rate in l/min:	2500
Seals:	NBR
Dome:	Technopolymer
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Adjusting screw:	Brass Ms58
Body:	Zamac
Piston:	Technopolymer
Lip seal:	NBR
Nut:	Brass Ms58
Ring nut:	Technopolymer
Bar:	Brass Ms58
Plug:	Technopolymer
Valve spring:	Steel
Valve part:	Vulcanized with NBR
Weight in kg:	0,817

### Dimensions

A:	60
B:	130
C:	60
D:	60
EE:	46
F:	38 x 2
G:	14
I:	35
L:	M4 suitable
M:	70
N:	1/8" pressure gauge connection