


Datasheet of Regulator Syntesi - 5612R142

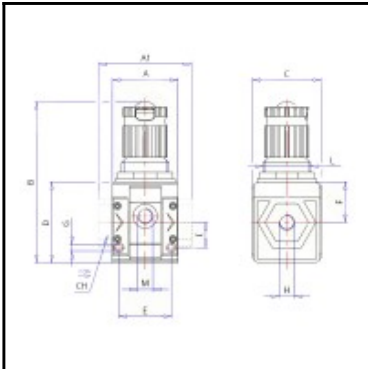

Description

Regulator Syntesi, connection G 1/4", flow rate 1600 l/min., maximum inlet pressure 15 bar

Rolling diaphragm regulator.
Adjusted pressure stays constant despite pressure variations.
Padlockable push-lock knob.
Including pressure gauge.
Additional ports for pressure gauges, pressure switches or for use as additional air take-offs.

Details

Series:	Syntesi
B:	102
C:	44
E:	33,5
F:	25,8
G:	Hole for screws M4
L:	M30x1,5
M:	1/8" (Pressure gauge connection or additional air intake)
Connection:	Female thread G 1/4"
max. inlet pressure:	15
Flow rate in l/min:	1600
Seals:	NBR O-Ring
Adjustment spring:	Steel
Adjustment knob:	Technopolymer
Input and output socket:	Brass Ms58 or aluminum, anodized
Flange:	Technopolymer
Bell:	Technopolymer
Board:	Technopolymer
Regulator case:	Technopolymer
Regulator screw:	Brass Ms58
Ring nut:	Technopolymer
Securing plate adjustment knob:	Steel, zinc-plated
Tappet:	Technopolymer
Valve spring:	Stainless steel
Closure:	Technopolymer
Weight in kg:	0,181

Dimensions

A:	42
B:	102
C:	44
D:	51,5
E:	33,5
F:	25,8
G:	Hole for screws M4
I:	16
L:	M30x1,5
M:	1/8" (Pressure gauge connection or additional air intake)