


Datasheet of EST 1000 K Air grinding spindle

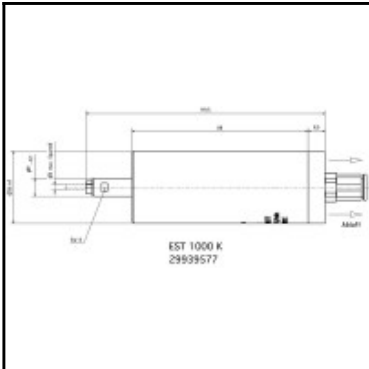

Description

100.000 min⁻¹, 100 Watt, exhaust to rear, oilfree, floating support, centrifugal governor

For installation in transfer lines, machine tools and robot stations

Stainless steel housings

Stainless steel spindles

Floating bearings

High speeds for excellent processing quality

Maintenance-friendly

High true-running accuracy for long tool lives

With centrifugal governor All data related to 6.3 bar working pressure.

Details

Idling speed rpm:	100000
Power in kW:	0,1
Direction of rotation:	Rotating clockwise
Exhaust Air:	to rear
Carbide burrs up to max. diam.:	3
Mounted points up to max. diam.:	5
Noise level in dB(A):	69
Air consumption in l/s:	3,5
Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen:	6 \ 8
Item number:	29939577
Weight in kg:	0,26

Dimensions