


Datasheet of ES 230 ER Air grinding spindle

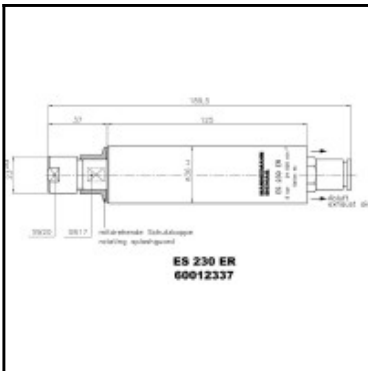

Description

24.000 min⁻¹, 320 Watt, paired bearings, ER collet

- For installation in transfer lines, machine tools and robot stations
 - Stainless steel housings
 - Stainless steel spindles
 - With collet chuck or precision collet chuck
 - High true-running accuracy
 - Paired bearings for longer tool life time and better running properties
 - Optional with rotating splashguard to prevent penetration of dust, water or chips
- All data related to 6.3 bar working pressure.

Details

Idling speed rpm:	24000
Power in kW:	0,32
Direction of rotation:	Rotating clockwise
Exhaust Air:	to rear
ER collet in mm:	6
Carbide burrs up to max. diam.:	12
Mounted points up to max. diam.:	25
Noise level in dB(A):	78
Air consumption in l/s:	12,5
Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen:	10 \ 12
Item number:	60012337
Weight in kg:	0,74

Dimensions