


## Datasheet of EBM 2400 SL Air motor for drilling

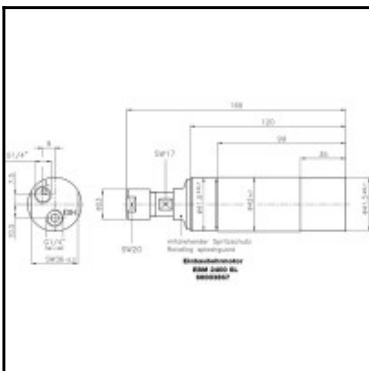

### Description

2900 min<sup>-1</sup>, 380 Watt, rotating anti-clockwise

- For installation in transfer lines, machine tools and robot stations
- Stainless steel housings
- Stainless steel spindles
- Ideal for drilling and brushing
- Without valve for central remote control
- Small housing diameter for minimum centre-to-centre spacing
- Rotating splashguard to prevent penetration of dust, water or chips

### Details

|                                                       |                |
|-------------------------------------------------------|----------------|
| Idling speed rpm:                                     | 2400           |
| Power in kW:                                          | 0,38           |
| Direction of rotation:                                | anti-clockwise |
| Exhaust Air:                                          | to rear        |
| ER collet in mm:                                      | 6              |
| Noise level in dB(A):                                 | 72             |
| Air consumption in l/s:                               | 8,5            |
| Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen: | 10 \ 12        |
| Item number:                                          | 60003867       |
| Weight in kg:                                         | 1,12           |

### Dimensions