


## Datasheet of ESR 30 Air grinding spindle

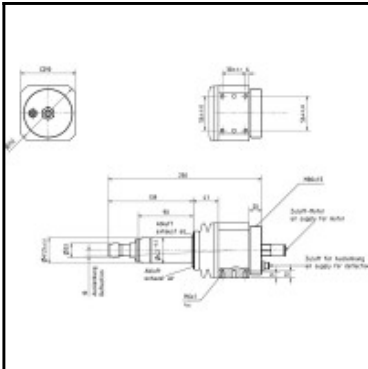

### Description

3.000 min<sup>-1</sup>, 380 Watt, radial compliance

- Use of non-lubricated air motors for low wear and long life time

All data related to 6.3 bar working pressure.

### Details

|                                                       |                    |
|-------------------------------------------------------|--------------------|
| Idling speed rpm:                                     | 3000               |
| Air supply:                                           | lubricated         |
| Power in kW:                                          | 380                |
| Radial deflection:                                    | +/- 4°             |
| Direction of rotation:                                | Rotating clockwise |
| Exhaust Air:                                          | to front           |
| ER collet in mm:                                      | 6                  |
| Compliance force range in N:                          | 10 - 150           |
| Force of compliance max.* in N:                       | 200                |
| Noise level in dB(A):                                 | 80                 |
| Air consumption in l/s:                               | 8,3                |
| Accessories supplied:                                 | Wrench             |
| Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen: | 10 \ 12            |
| Item number:                                          | 29940035           |
| Weight in kg:                                         | 4,75               |

### Dimensions