


Datasheet of ESR 20 Air grinding spindle

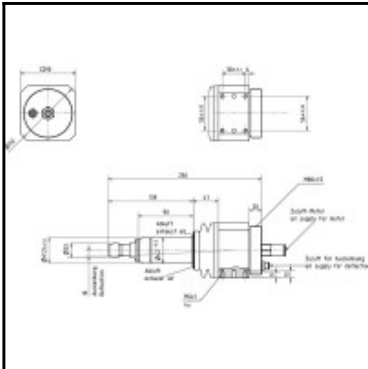

Description

2.000 min⁻¹, 380 Watt, radial compliance

- Use of non-lubricated air motors for low wear and long life time

All data related to 6.3 bar working pressure.

Details

Idling speed rpm:	2000
Air supply:	lubricated
Power in kW:	380
Radial deflection:	+/- 4°
Direction of rotation:	Rotating clockwise
Exhaust Air:	to front
ER collet in mm:	6
Compliance force range in N:	10 - 150
Force of compliance max.* in N:	200
Noise level in dB(A):	80
Air consumption in l/s:	8,3
Accessories supplied:	Wrench
Anschluss Zuluftschlauch (Blitz) ø mm, innen \ außen:	10 \ 12
Item number:	29940015
Weight in kg:	4,75

Dimensions