


## Datasheet of WS 19 TAB WaterProfi-coupling SLW 19 Quick coupling

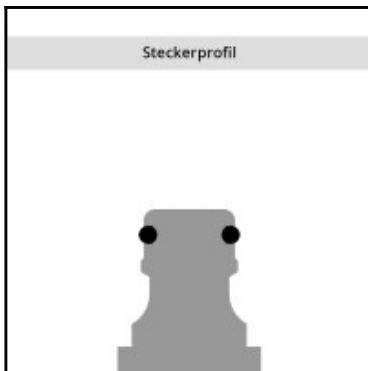

### Description

WaterProfi-quick coupling with shut-off valve and hose connection 3/4" (19 mm), brass nickel plated, DN 9

WaterProfi quick couplings series WS are completely made of brass MS 58 which offers a more robust and wear resistance vs other couplings made of plastics. The one-hand operation guarantees a simplified work and an optimum ease of use. WaterProfi products are outfitted with O-rings to offer best sealing characteristics. That means: leakages can be avoided with the coupling system as often seen with pre-mounted compression fittings now in the past.

### Details

Series:	WS
Series long:	WS
Bore:	DN 9
Maximum working pressure in bar:	PN 16 bar
max. temperature in °C:	+95°C
Shut-Off:	Quick coupling Single Shut-Off
Connection:	Hose barb 19mm LW(3/4")
Material:	Brass nickel plated
Weight in kg:	0,173

### Dimensions

B mm:	32
L mm:	75