


Datasheet of WL 32 T WaterProfi-coupling SLW 32 Quick coupling

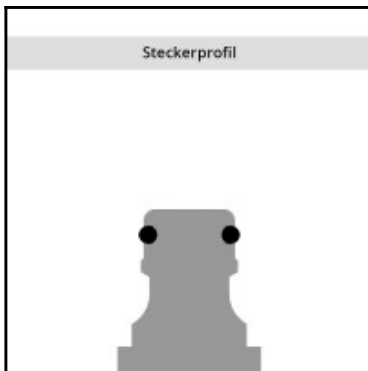

Description

WaterProfi-quick coupling straight-through and hose connection 1 1/4" (32 mm), brass nickel plated, DN 16

WaterProfi quick couplings series WL are completely made of brass MS 58 which offers a more robust and wear resistance vs other couplings made of plastics. The one-hand operation guarantees a simplified work and an optimum ease of use. WaterProfi products are outfitted with O-rings to offer best sealing characteristics. That means: leakages can be avoided with the coupling system as often seen with pre-mounted compression fittings now in the past.

The **series WL** with extra large through-hole is ideal for water supply in industry, craft, agriculture and horticulture.

Details

| | |
|----------------------------------|---------------------------------|
| Series: | WL |
| Series long: | WL |
| Bore: | DN 16 |
| Maximum working pressure in bar: | PN 16 bar |
| max. temperature in °C: | +95°C |
| Shut-Off: | Quick coupling Straight-Through |
| Connection: | Hose barb 32mm LW(1 1/4") |
| Material: | Brass nickel plated |
| Weight in kg: | 0,298 |

Dimensions

| | |
|-------|----|
| B mm: | 39 |
| L mm: | 86 |