


## Datasheet of WSE 13 TAB WaterProfi-coupling SLW 13 Quick coupling

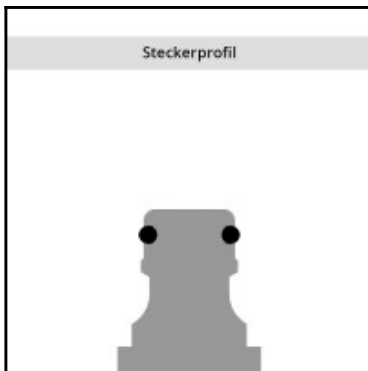

### Description

WaterProfi-quick coupling with shut-off valve and hose connection 1/2" (13 mm), stainless steel, DN 9

WaterProfi quick couplings **series WSE** are made of stainless steel which offers a more robust and wear resistance vs other couplings made of plastics. Furthermore the stainless steel couplings can be used in applications with special sanitation requirements or for hot water (e.g. for cleaning in food industry). The one-hand operation guarantees a simplified work and an optimum ease of use. WaterProfi products are outfitted with O-rings to offer best sealing characteristics. That means: leakages can be avoided with the coupling system as often seen with pre-mounted compression fittings now in the past.

The series WSE is also compatible with the plug profile usual for the market.

### Details

Series:	WSE
Series long:	WSE
Bore:	DN 9
Maximum working pressure in bar:	PN 16 bar
max. temperature in °C:	+95°C
Shut-Off:	Quick coupling Single Shut-Off
Connection:	Hose barb 13mm LW(1/2")
Material:	stainless steel AISI 303
Weight in kg:	0,163

### Dimensions

B mm:	34
L mm:	75