


## Datasheet of WSE 12 NA WaterProfi-plug G 1/2" AG

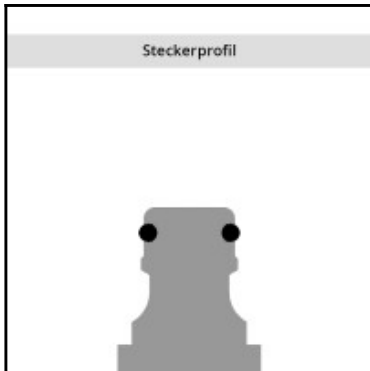

### Description

WaterProfi-plug with male thread (valve adaptor) G 1/2" AG, stainless steel, DN 9

WaterProfi plugs **series WSE** are made of stainless steel which offers a more robust and wear resistance vs other couplings made of plastics. Furthermore the stainless steel couplings can be used in applications with special sanitation requirements or for hot water (e.g. for cleaning in food industry). The one-hand operation guarantees a simplified work and an optimum ease of use. WaterProfi products are outfitted with O-rings to offerbest sealing characteristics. That means: leakages can be avoided with the coupling system as often seen with pre-mounted compression fittings now in the past.

The series WSE is also compatible with the plug profile usual for the market.

### Details

Series:	WSE
Series long:	WSE
Bore:	DN 9
Maximum working pressure in bar:	PN 16 bar
max. temperature in °C:	+95°C
Shut-Off:	Plug Straight-Through
Connection:	Male thread 1/2"
Material:	stainless steel AISI 303
Weight in kg:	0,053

### Dimensions

B mm:	26
L mm:	40