


## Datasheet of 6801 08 13 Stud fitting

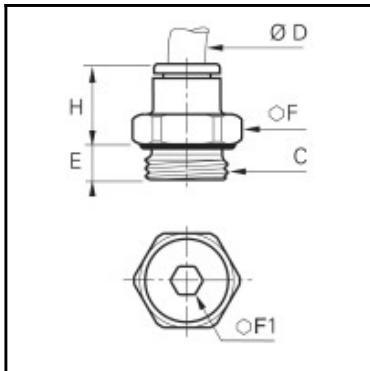

### Description

Stud fitting CleanFit®, Brass nickel plated chemical fda brass, 8 mm, G1/4"

In-line connection of tubing to a threaded port. External tightening with a flat spanner or socket wrench, internal adjustment with an Allen key

Robust eco-conception, aesthetic design and superior level of cleanliness for a perfect compatibility

Airtight, antistatic packaging

Full flow

100 % leak-tested, date coding to guarantee quality and traceability

ASTM G93-03 B 300, ISO 15001, VDI 2083

Conform to CGA G4.1 and DI93/42/EC

### Details

ØD:	8 mm
C:	G1/4"
E:	5,5
F:	16
F1:	6
H:	19,5
Maximum working pressure in bar:	15
Material seal:	EPDM
Material body:	Brass nickel plated chemical fda brass
Material toothed washer:	Stainless steel
min. temperature in °C:	-10
max. temperature in °C:	95
Vacuum resistance in mm Hg:	755
Material:	Brass nickel plated chemical fda brass
RoHS compliant:	Yes
Weight in kg:	0,016

### Dimensions

ØD:	8 mm
C:	G1/4"
E:	5,5
F:	16
F1:	6
H:	19,5