


Datasheet of 6822 08 06 Plug-in barb connector

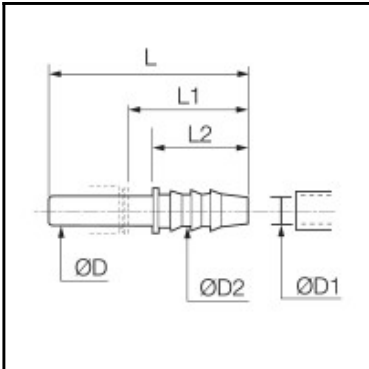

Description

Plug-in barb connector CleanFit®, Biobased raw materials, 8 mm, 6 mm

Connection of a flexible tube or hose with a push-in fitting

Robust eco-conception, aesthetic design and superior level of cleanliness for a perfect compatibility

Airtight, antistatic packaging

Full flow

100 % leak-tested, date coding to guarantee quality and traceability

ASTM G93-03 B 300, ISO 15001, VDI 2083

Conform to CGA G4.1 and DI93/42/EC

Details

ØD:	8 mm
ØD1:	6 mm
ØD2:	8,5
L:	43
L1:	25
L2:	17
Maximum working pressure in bar:	15
Material body:	Biobased raw materials
min. temperature in °C:	-10
max. temperature in °C:	95
Vacuum resistance in mm Hg:	755
Material:	Biobased raw materials
RoHS compliant:	Yes
Weight in kg:	0,005

Dimensions

ØD:	8 mm
ØD1:	6 mm
ØD2:	8,5
L:	43
L1:	25
L2:	17