

Datasheet of W312000011 – 5/2-pedal operated valve PEV 35 PEB PR



Description



5/2-pedal operated valve PEV 35 PEB PR, bistable, 2-10 bar, guarded, 1/4"

The valves series PEV with pedal are available in a wide range:

- 5/2 1/4" monostable and bistable with guarded pedal
- 3/2 monostable, pedal not guarded
- 3/2 Ø4 monostable, pedal not guarded
- 3/2 M5 in monostable and bistable configuration with guarded pedal
- 3/2 Ø4 in monostable and bistable configuration with guarded pedal

Details

Flow rate in l/min:	1.550 (at 6.3 bar)
Medium suitability:	Filtered air without lubrication; lubrication, if used, must be continuous
Connection:	Female thread 1/4"
Working temperature:	-10°C – +60°C
Additional information:	The pedal-down position is maintained by a lever. When the foot presses on the lever, the pedal releases and can rise.
Working pressure:	2,5 – 10 bar
Function:	bistable, guarded
Weight in kg:	1,035

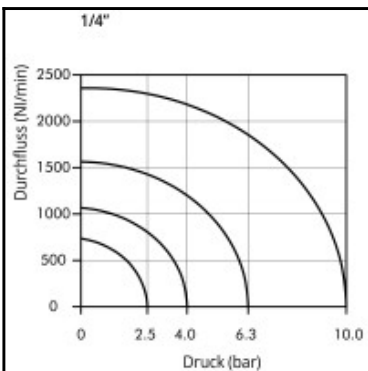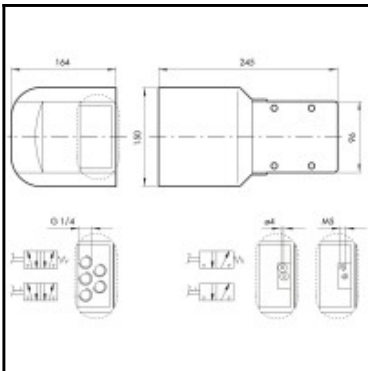

Dimensions