


Datasheet of W3120000311 – 3/2-pedal operated valve PEV F3 PEB PR

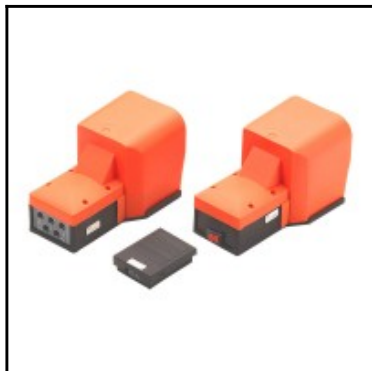

Description



3/2-pedal operated valve PEV F3 PEB PR, bistable, guarded, Ø=4mm Push-in-connections

The valves series PEV with pedal are available in a wide range:

- 5/2 1/4" monostable and bistable with guarded pedal
- 3/2 monostable, pedal not guarded
- 3/2 Ø4 monostable, pedal not guarded
- 3/2 M5 in monostable and bistable configuration with guarded pedal
- 3/2 Ø4 in monostable and bistable configuration with guarded pedal

Details

| | |
|-------------------------|--|
| Flow rate in l/min: | 145 (at 6,3 bar) |
| Medium suitability: | Filtered air without lubrication; lubrication, if used, must be continuous |
| Connection: | Push-in fitting 4 mm outside calibrated |
| Working temperature: | -10°C – +60°C |
| Additional information: | The pedal-down position is maintained by a lever. When the foot presses on the lever, the pedal releases and can rise. |
| Working pressure: | 2,5 – 10 bar |
| Function: | bistable, guarded |
| Weight in kg: | 0,914 |

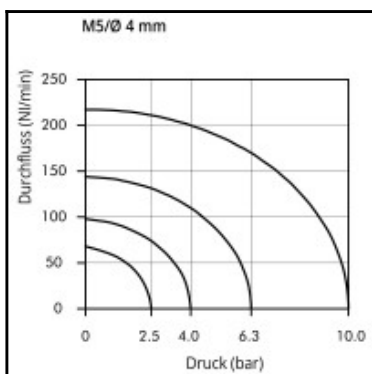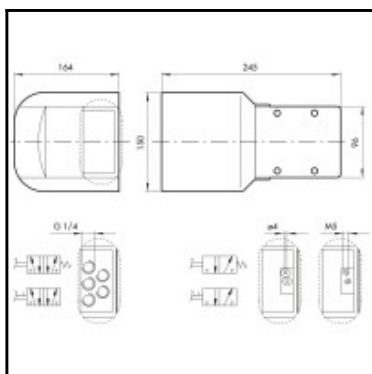

Dimensions