


Datasheet of 9068310 – IN-LINE PRESSURE INDICATOR thread-pipe 1/8-Ø8 green

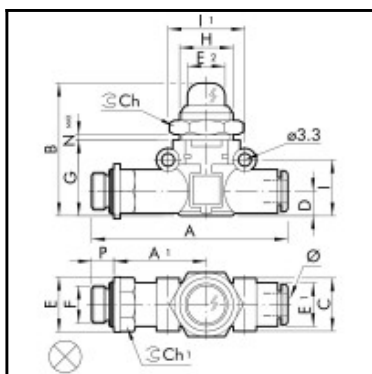

Description

Inline pressure indicator, thread-pipe, 1/8-Ø8, green, 2 – 10 bar

The LAM L pneumatic light indicator belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two FOX push-in fittings, and in the version for thread-pipe connection with a brass nickelplated male thread and a push-in fitting.

When there is no pressure, the clear technopolymer bell looks empty. When there is pressure, a red signal appears. The clear bell can be cleaned using normal detergents or ethyl alcohol, as the technopolymer used is fully compatible.

Details

| | |
|-----------------------|---|
| Flow rate in l/min: | 800 NI/min (at 6.3 bar, ?P=1 bar) |
| F: | 1/8 |
| B: | 41 |
| C: | 18,7 |
| Ch1: | 14 |
| E: | 15 |
| E1: | 13,8 |
| E2: | 10,6 |
| G: | 26 |
| H: | M15x1 |
| N: | 4,5 |
| Medium suitability: | Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous. |
| Working temperature: | -20 – +60 °C |
| Working pressure: | 2 – 10 bar |
| Recommended pipe: | Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene. |
| Colour with pressure: | Green |
| Weight in kg: | 0,049 |

Dimensions

| | |
|---------------|---|
| Connection 1: | Male thread G 1/8 |
| Connection 2: | Push-in fitting 8 mm outside calibrated |
| F: | 1/8 |
| Ø: | 8 |
| A: | 66,2 |
| A1: | 31,8 |
| B: | 41 |
| C: | 18,7 |
| Ch: | 17 |
| Ch1: | 14 |
| D: | 9,1 |
| E: | 15 |
| E1: | 13,8 |
| E2: | 10,6 |
| G: | 26 |
| H: | M15x1 |
| I: | 18,7 |
| I1: | 24 |
| P: | 6 |
| N: | 4,5 |