


## Datasheet of 9068312 – IN-LINE PRESSURE INDICATOR thread-pipe 3/8-Ø8 green

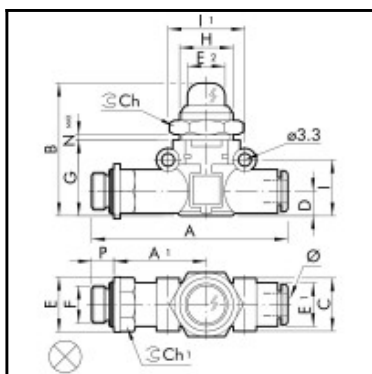

### Description

Inline pressure indicator, thread-pipe, 3/8-Ø8, green, 2 – 10 bar

The LAM L pneumatic light indicator belongs to the LINE ON LINE® family, which means it can be connected to all the other components in series or in parallel.

Available in the version for pipe-pipe connection with two FOX push-in fittings, and in the version for thread-pipe connection with a brass nickelplated male thread and a push-in fitting.

When there is no pressure, the clear technopolymer bell looks empty. When there is pressure, a red signal appears. The clear bell can be cleaned using normal detergents or ethyl alcohol, as the technopolymer used is fully compatible.

### Details

Flow rate in l/min:	800 NI/min (at 6.3 bar, ?P=1 bar)
F:	3/8
B:	41
C:	18,7
Ch1:	17
E:	22
E1:	13,8
E2:	10,6
G:	26
H:	M15x1
N:	4,5
Medium suitability:	Filtered, lubricated or unlubricated, compressed air. Lubrication, if used, must be continuous.
Working temperature:	-20 – +60 °C
Working pressure:	2 – 10 bar
Recommended pipe:	Rilsan PA 11 – Nylon 6 – Polyamide 12 – Polypropylene.
Colour with pressure:	Green
Weight in kg:	0,066

### Dimensions

Connection 1:	Male thread G 3/8
Connection 2:	Push-in fitting 8 mm outside calibrated
F:	3/8
Ø:	8
A:	72,2
A1:	34,8
B:	41
C:	18,7
Ch:	17
Ch1:	17
D:	9,1
E:	22
E1:	13,8
E2:	10,6
G:	26
H:	M15x1
I:	18,7
I1:	24
P:	9
N:	4,5